


# ISU Compact Plasma Radiation Source with X-Pinch Load

Roman Shapovalov  
IAC  
Feb 11, 2013

# LRC circuit analysis\*

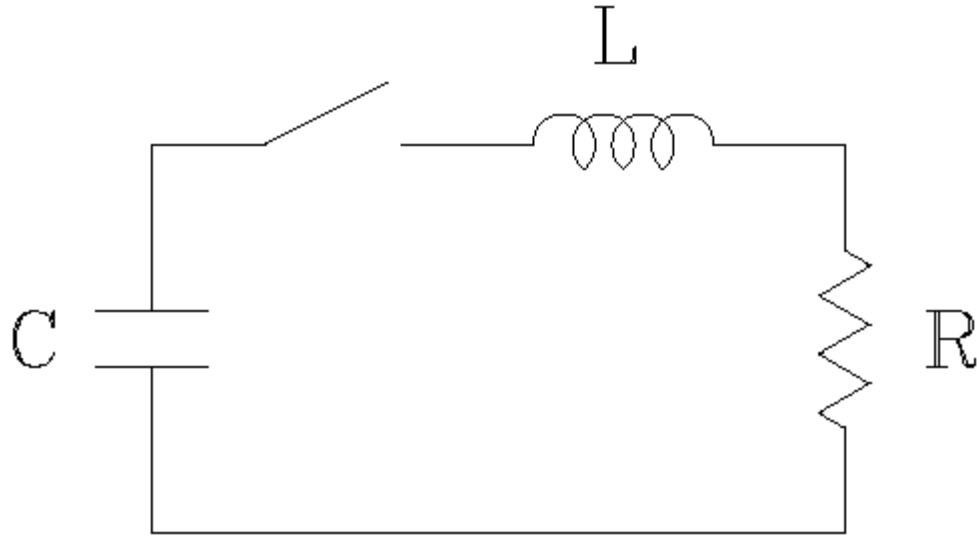

$$L d^2 i / d^2 t + R di / dt + i / C = 0$$

**“Damped”**

$$R = \sqrt{L/C}$$

$$v_{peak} = 0.546293 V_0$$

$$i_{peak} = 0.546293 V_0 / R$$

$$t_{peak} = 1.2092 \sqrt{LC}$$

**“Critical Damped”**

$$R = 2 \sqrt{L/C}$$


$$v_{peak} = 0.73576 V_0$$

$$i_{peak} = 0.73576 V_0 / R$$

$$t_{peak} = \sqrt{LC}$$

\*M.G.Mazarakis, and R.B.Spielman “A compact, high-voltage E-beam pulser” 1999 IEEE

# LRC circuit example: damped vs critical damped

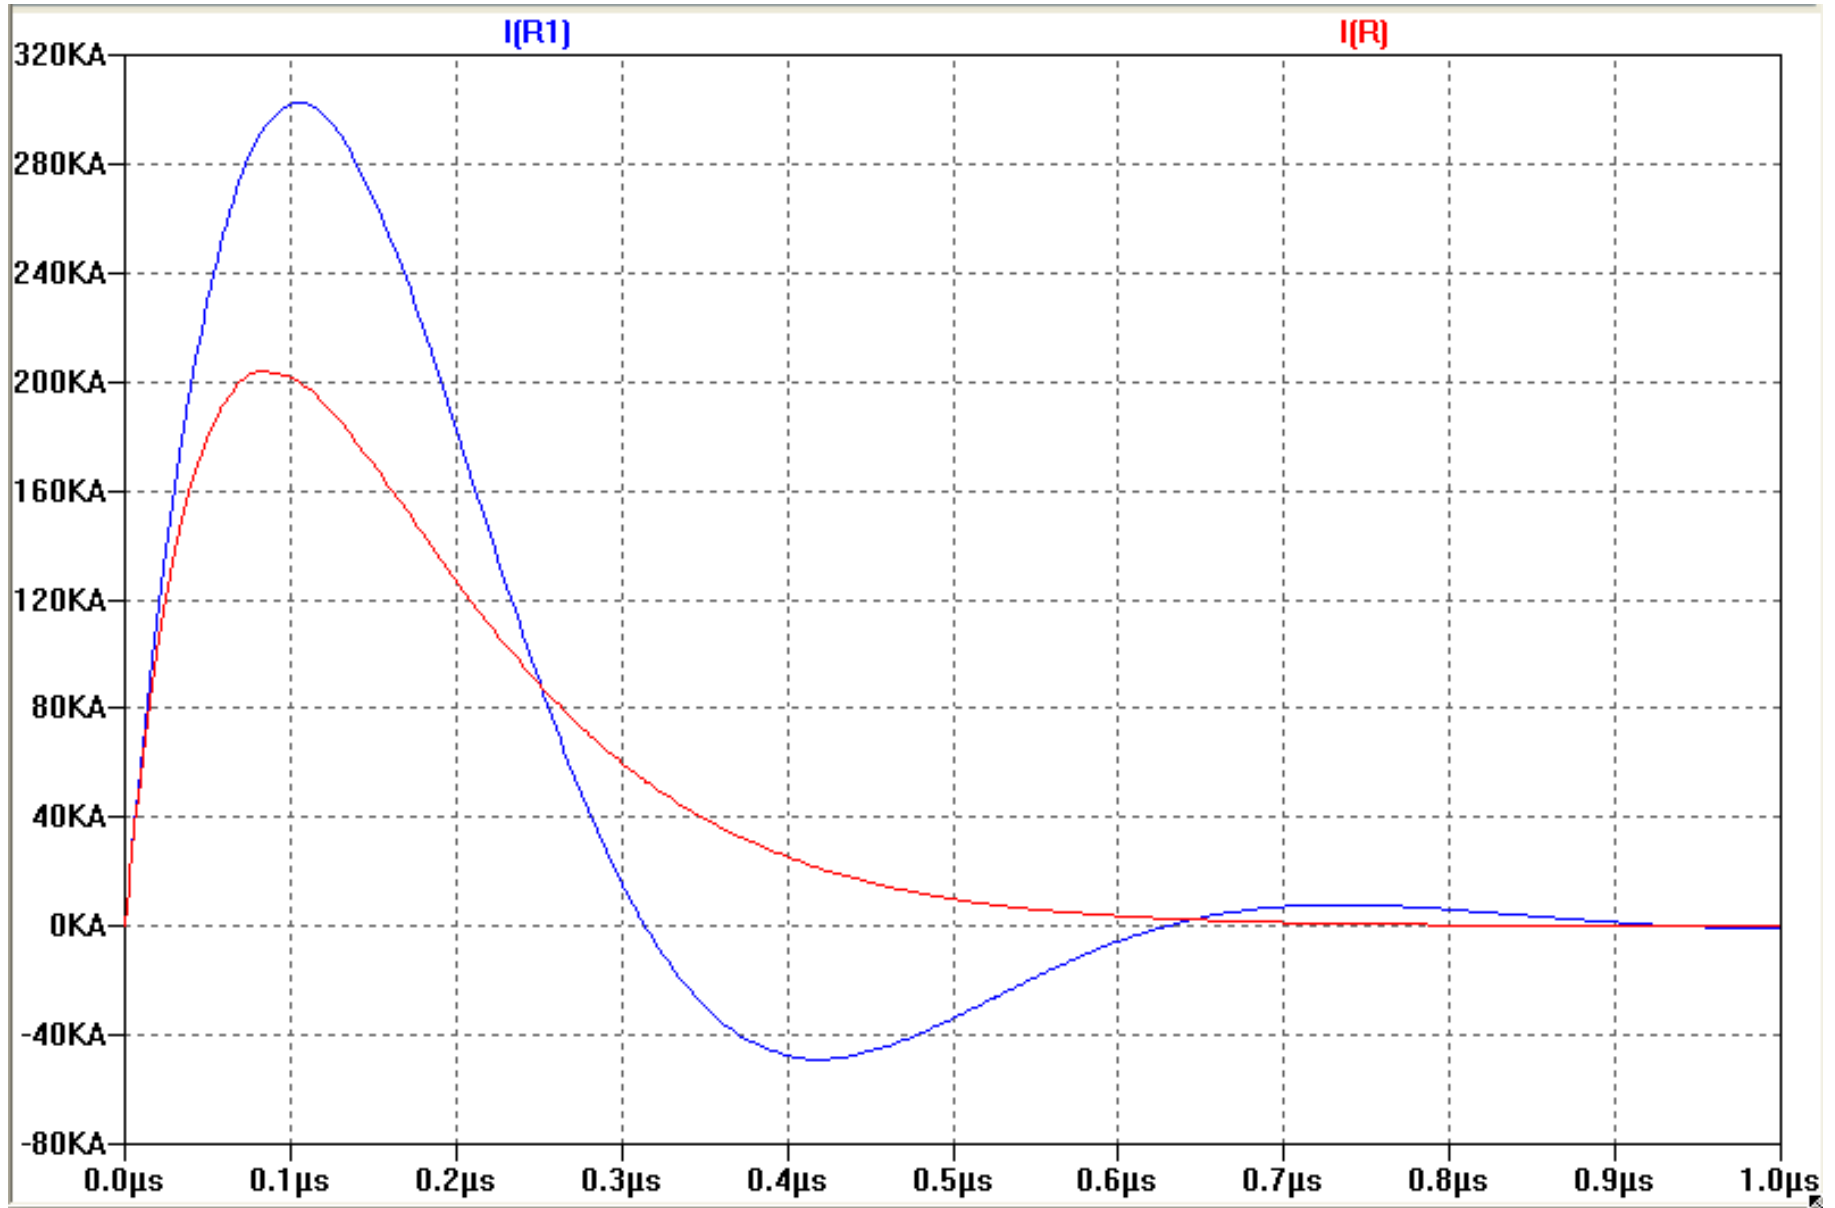

\*M.G.Mazarakis, and R.B.Spielman "A compact, high-voltage E-beam pulser" 1999 IEEE

# IAC Compact Plasma Radiation Source (CPRS)


X-Pinch

$$I_{peak} = 100 - 300 \text{ kA}$$

$$R_{load} = (0.1 - 0.5) \Omega$$

$$rise = 1 - 2 \text{ kA/ns}$$

$$L_{load} = (13 - 20) \text{ nH}$$

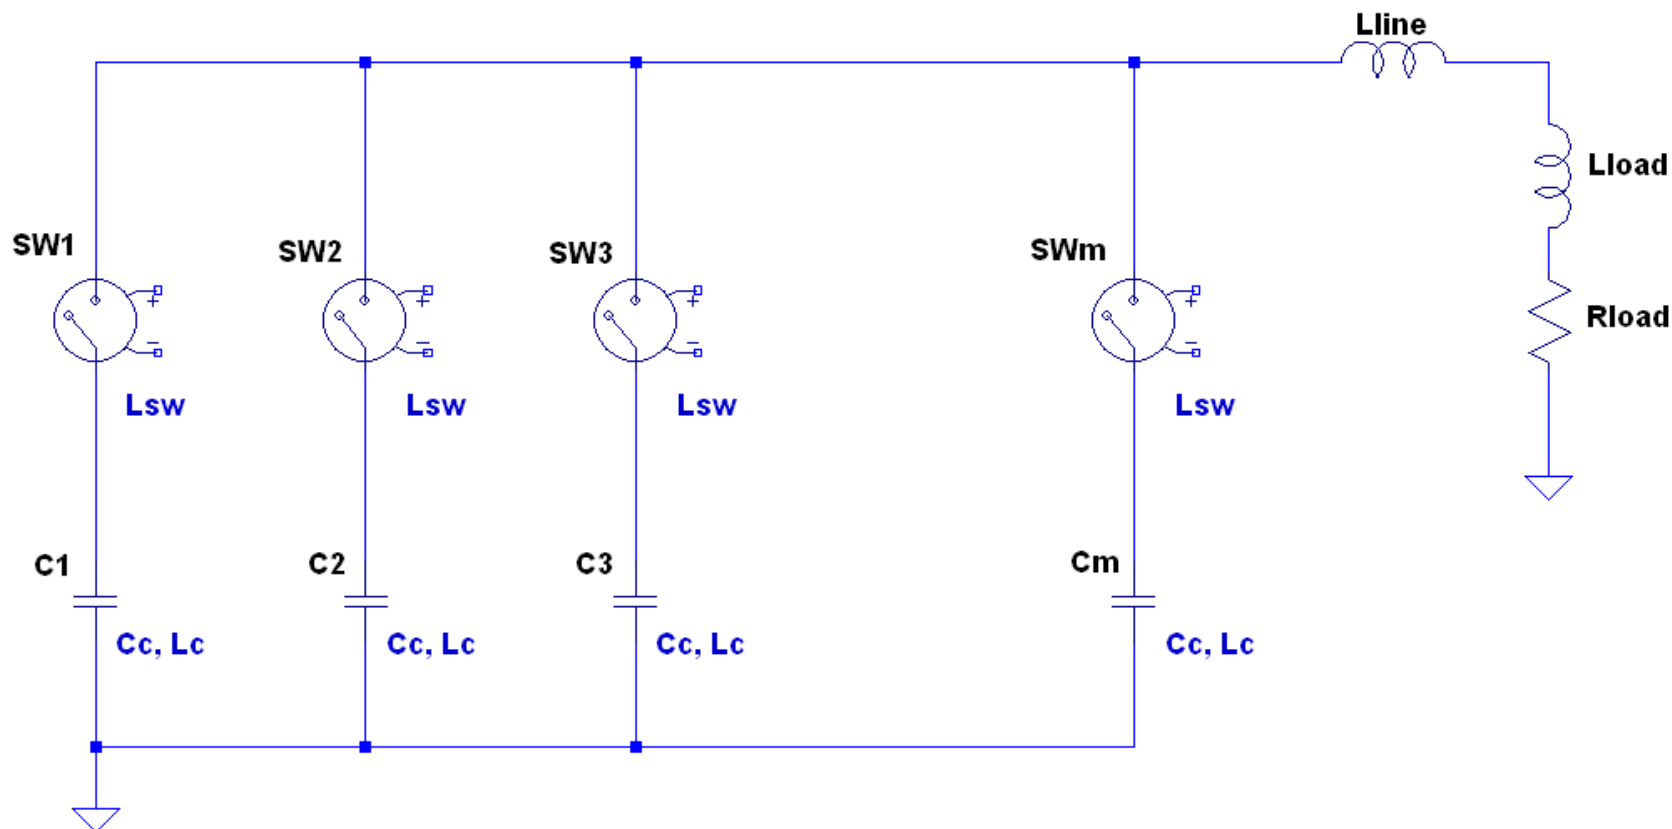

# General Atomics Electronics System: Capacitors\*

## Series PDS/PDSS - Fast Pulse Capacitors



Double-Ended Plastic Case Capacitors  
Low Inductance, Low ESR (0.06 - 0.13  $\Omega$ )  
Sub-microsecond pulse risetime to 100 kV

| Part Number | Cap Rating (nF) | Voltage Rating (kV) | Rated Peak Current (kA) | Rated Voltage Reversal (%) | Design Life (at Rated VR) | Operating Temp Range ( $^{\circ}\text{C}$ ) | Approx. Inductance (nH) |
|-------------|-----------------|---------------------|-------------------------|----------------------------|---------------------------|---|-------------------------|
| 35460       | 8               | 100                 | 25                      | 20                         | $1 \times 10^5$           | -10 to +40                                  | 6                       |
| 35467       | 20              | 100                 | 25                      | 10                         | $1 \times 10^5$           | -10 to +40                                  | 6                       |
| 35473       | 40              | 100                 | 25                      | 10                         | $5 \times 10^4$           | -10 to +40                                  | 10                      |
| 35479       | 80              | 100                 | 25                      | 10                         | $4 \times 10^4$           | -10 to +40                                  | 8                       |
| 35478       | 80              | 100                 | 60                      | 30                         | $5 \times 10^4$           | -10 to +40                                  | 10                      |
| 35462       | 100             | 100                 | 25                      | 10                         | $3.4 \times 10^4$         | -10 to +40                                  | 10                      |
| 35477       | 100             | 100                 | 50                      | 45                         | $5 \times 10^3$           | -10 to +40                                  | 10                      |

\*<http://www.ga-esi.com/EP/capacitors/series-pds.php>

## IAC X-Pinch CPRS: Four capacitors 35478

Capacitor 35477:  $C_c = 80 \text{ nF}$ ,  $L_c = 10 \text{ nH}$ ,  $V_0 = 100 \text{ kV}$ ,  $I_c = 60 \text{ kA}$

Switch:  $L_{sw} = 10 \text{ nH}$

With 4 such capacitors we can easily design 200 kA, 0.25  $\Omega$  generator

$$L = (L_c + L_{sw})/m + L_{load+line} = (10 + 10)/4 + 15 = 20 \text{ nH}$$

$$C_c = m \times C_c = 4 \times 80 = 320 \text{ nF}$$

$$R_{load} = \sqrt{L/C} = 0.25 \Omega$$

Say, we will charge our four capacitors up to  $V_0 = 91.5 \text{ kV} < 100 \text{ kV}$

$$I_{peak} = (0.546293 \times V_0) / R = 200 \text{ kA} < 60 \times 4 = 240 \text{ kA}$$

$$V_{peak} = 0.546293 \times V_0 = 50 \text{ kV}$$

$$t_{peak} = 1.2092 \times \sqrt{LC} = 97 \text{ ns}$$

# IAC X-Pinch CPRS: Four capacitors 35478

Capacitor 35477:  $C_c = 80 \text{ nF}$ ,  $L_c = 10 \text{ nH}$ ,  $V_0 = 100 \text{ kV}$ ,  $I_c = 60 \text{ kA}$

Switch:  $L_{sw} = 10 \text{ nH}$

With 4 such capacitors we can expect

$$I_{peak} = 200 \text{ kA}$$


$$V_{peak} = 50 \text{ kV}$$

$$t_{peak} = 97 \text{ ns}$$

$$2.06 \text{ kA/ns}$$

$$L_{load+line} = 15 \text{ nH}$$

$$R_{load} = 0.25 \Omega$$

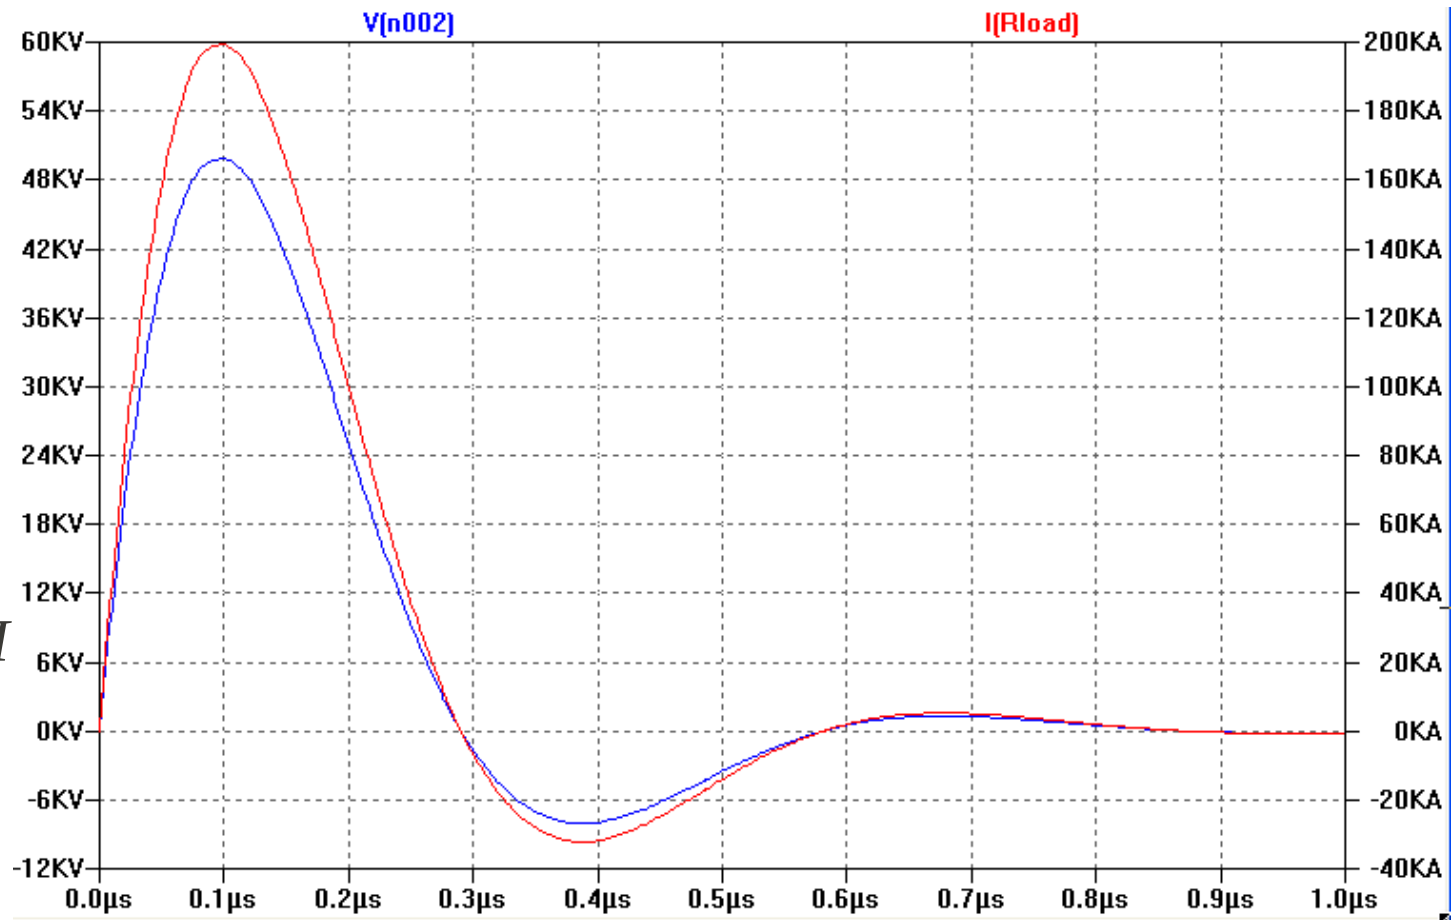

# IAC X-Pinch CPRS: less capacitors, more capacitors

Capacitor 35477:  $C_c = 80 \text{ nF}$ ,  $L_c = 10 \text{ nH}$ ,  $V_0 = 100 \text{ kV}$ ,  $I_c = 60 \text{ kA}$

Switch:  $L_{sw} = 10 \text{ nH}$

With 2 - 10 such capacitors we can expect:

| m  | $C_c$<br>nF | $L_c$<br>nH | $L_{sw}$<br>nH | $L_{load}$<br>nH | $V_0$ , kV | C, nF | L, nH | R, $\Omega$ | $I_{peak}$ , kA | $V_{peak}$ , kA | $t_{peak}$ , kA | kA/ns |
|----|-------------|-------------|----------------|------------------|------------|-------|-------|-------------|-----------------|-----------------|-----------------|-------|
| 2  | 80          | 10          | 10             | 15               | 86.8       | 160.0 | 25.0  | 0.40        | 120.0           | 47.4            | 76.48           | 1.57  |
| 3  | 80          | 10          | 10             | 15               | 99.0       | 240.0 | 21.7  | 0.30        | 180.0           | 54.1            | 87.20           | 2.06  |
| 4  | 80          | 10          | 10             | 15               | 100.0      | 320.0 | 20.0  | 0.25        | 218.5           | 54.6            | 96.74           | 2.26  |
| 5  | 80          | 10          | 10             | 15               | 100.0      | 400.0 | 19.0  | 0.22        | 250.7           | 54.6            | 105.42          | 2.38  |
| 6  | 80          | 10          | 10             | 15               | 100.0      | 480.0 | 18.3  | 0.20        | 279.5           | 54.6            | 113.43          | 2.46  |
| 7  | 80          | 10          | 10             | 15               | 100.0      | 560.0 | 17.9  | 0.18        | 305.9           | 54.6            | 120.92          | 2.53  |
| 8  | 80          | 10          | 10             | 15               | 100.0      | 640.0 | 17.5  | 0.17        | 330.4           | 54.6            | 127.97          | 2.58  |
| 9  | 80          | 10          | 10             | 15               | 100.0      | 720.0 | 17.2  | 0.15        | 353.2           | 54.6            | 134.65          | 2.62  |
| 10 | 80          | 10          | 10             | 15               | 100.0      | 800.0 | 17.0  | 0.15        | 374.8           | 54.6            | 141.02          | 2.66  |



# IAC X-Pinch CPRS: other capacitors

| Part Number | Cap Rating (nF) | Voltage Rating (kV) | Rated Peak Current (kA) | Rated Voltage Reversal (%) | Design Life (at Rated VR) | Operating Temp Range (°C) | Approx. Inductance (nH) |
|-------------|-----------------|---------------------|-------------------------|----------------------------|---------------------------|---------------------------|-------------------------|
| 35460       | 8               | 100                 | 25                      | 20                         | $1 \times 10^5$           | -10 to +40                | 6                       |
| 35467       | 20              | 100                 | 25                      | 10                         | $1 \times 10^5$           | -10 to +40                | 6                       |
| 35473       | 40              | 100                 | 25                      | 10                         | $5 \times 10^4$           | -10 to +40                | 10                      |
| 35479       | 80              | 100                 | 25                      | 10                         | $4 \times 10^4$           | -10 to +40                | 8                       |
| 35478       | 80              | 100                 | 60                      | 30                         | $5 \times 10^4$           | -10 to +40                | 10                      |
| 35462       | 100             | 100                 | 25                      | 10                         | $3.4 \times 10^4$         | -10 to +40                | 10                      |
| 35477       | 100             | 100                 | 50                      | 45                         | $5 \times 10^3$           | -10 to +40                | 10                      |

| Capacitors | m | $I_c$ , kA | $C_C$ , nF | $L_C$ , nH | $L_{SW}$ , nH | $L_{load}$ , nH | $V_0$ , kV | $R$ , $\Omega$ | $I_{peak}$ , kA | $V_{peak}$ , kA | $t_{peak}$ , kA | kA/ns |
|------------|---|------------|------------|------------|---------------|-----------------|------------|----------------|-----------------|-----------------|-----------------|-------|
| 35460      | 4 | 25         | 8          | 6          | 10            | 15              | 100.0      | 0.77           | 70.9            | 54.6            | 29.82           | 2.38  |
| 35467      | 4 | 25         | 20         | 6          | 10            | 15              | 90.0       | 0.49           | 100.9           | 49.2            | 47.14           | 2.14  |
| 35473      | 4 | 25         | 40         | 10         | 10            | 15              | 65.0       | 0.35           | 100.4           | 35.5            | 68.40           | 1.47  |
| 35479      | 4 | 25         | 80         | 8          | 10            | 15              | 45.0       | 0.25           | 99.6            | 24.6            | 95.52           | 1.04  |
| 35478      | 4 | 60         | 80         | 10         | 10            | 15              | 100.0      | 0.25           | 218.5           | 54.6            | 96.74           | 2.26  |
| 35462      | 4 | 25         | 100        | 10         | 10            | 15              | 41.0       | 0.22           | 100.2           | 22.4            | 108.15          | 0.93  |
| 35477      | 4 | 50         | 100        | 10         | 10            | 15              | 82.0       | 0.22           | 200.3           | 44.8            | 108.15          | 1.85  |