




R3 Analysis Sector 1 Levers areas to the upstream side with corrected axis and corrected engineering data

<i>Author</i>	<i>Kalyan Jinnuri</i>
<i>Subject</i>	<i>Sector 1 with corrected axis and corrected engineering data</i>
<i>Prepared for</i>	<i>Region 3 Drift Chamber Analysis</i>
<i>First Saved</i>	<i>Thursday, May 15, 2008</i>
<i>Last Saved</i>	<i>Friday, May 16, 2008</i>
<i>Product Version</i>	<i>11.0 Release</i>

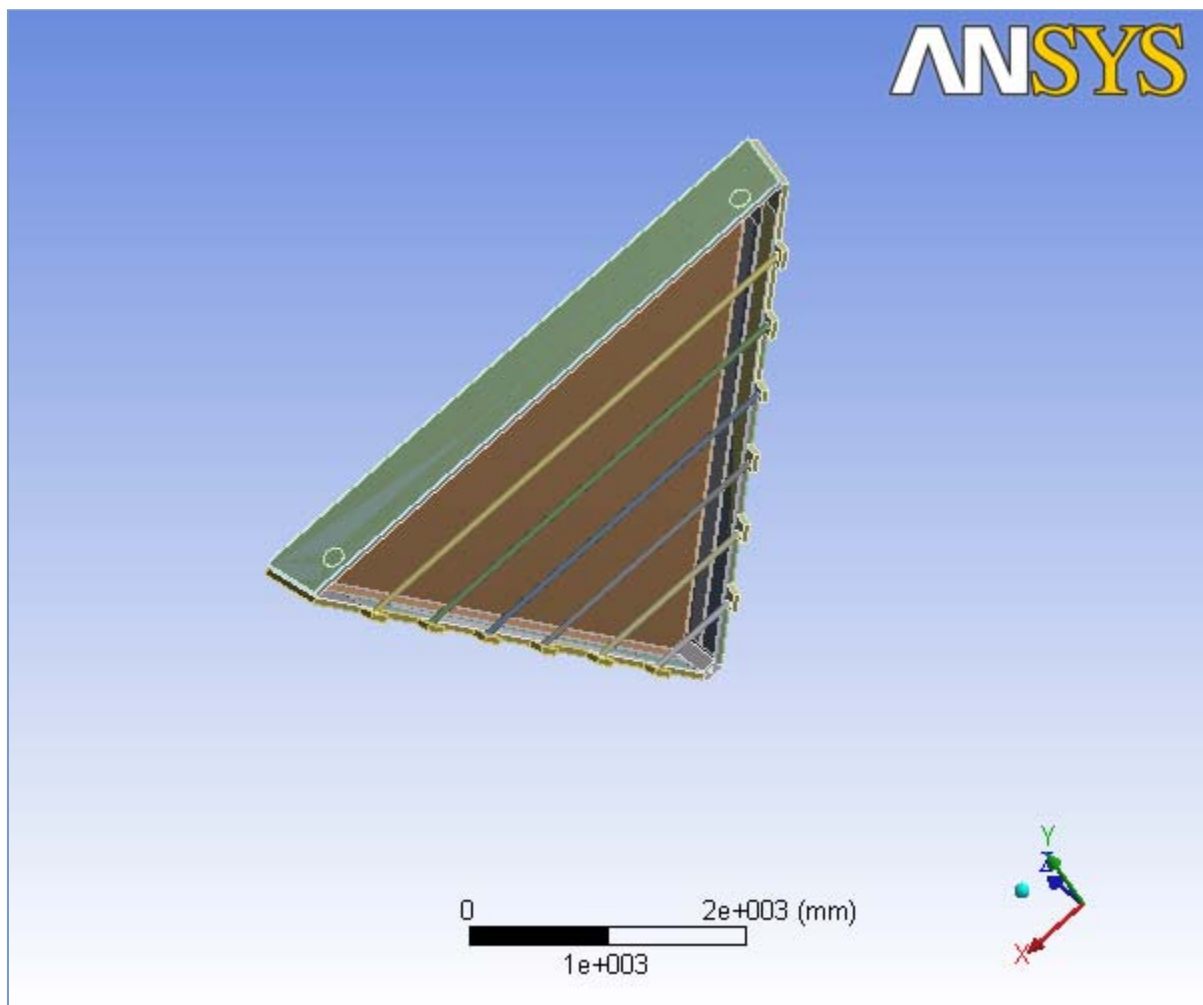

Contents

- **Sector 1**
 - [Geometry](#)
 - [Parts](#)
 - [Coordinate Systems](#)
 - [Connections](#)
 - [Contact Regions](#)
 - [Mesh](#)
 - [Mesh Controls](#)
 - **Static Structural**
 - [Analysis Settings](#)
 - [Acceleration](#)
 - [Loads](#)
 - [Solution](#)
 - [Solution Information](#)
 - [Results](#)
- **Material Data**
 - [Aluminum](#)
 - [Polyurethane](#)
 - [Stainless steel](#)
 - [Carbon fiber](#)
 - [Hexcel](#)

Units

TABLE 1

Unit System	Metric (mm, kg, N, °C, s, mV, mA)
Angle	Degrees
Rotational Velocity	rad/s

Sector 1

Geometry

TABLE 2
Sector 1 > Geometry

Object Name	<i>Geometry</i>
State	Fully Defined
Definition	
Source	C:\Documents and Settings\Jinnuri\Desktop\website\AI slit\change of directions\2.agdb
Type	DesignModeler
Length Unit	Millimeters
Element Control	Program Controlled
Display Style	Part Color
Bounding Box	
Length X	4768.3 mm
Length Y	4080.2 mm

Length Z	1998.5 mm
Properties	
Volume	7.9382e+008 mm ³
Mass	330.17 kg
Statistics	
Bodies	26
Active Bodies	26
Nodes	217196
Elements	52335
Preferences	
Import Solid Bodies	Yes
Import Surface Bodies	Yes
Import Line Bodies	Yes
Parameter Processing	Yes
Personal Parameter Key	DS
CAD Attribute Transfer	No
Named Selection Processing	No
Material Properties Transfer	No
CAD Associativity	Yes
Import Coordinate Systems	No
Reader Save Part File	No
Import Using Instances	Yes
Do Smart Update	No
Attach File Via Temp File	No
Analysis Type	3-D
Mixed Import Resolution	None
Enclosure and Symmetry Processing	Yes

TABLE 3
Sector 1 > Geometry > Parts

Object Name	<i>Nose Plate</i>	<i>Right End Plate Upstream Hole Area</i>	<i>Right End Plate Downstream Hole Area</i>	<i>Right End Plate Aluminum Casing</i>	<i>Right End Plate Polyurethane</i>
State	Meshed				
Graphics Properties					
Visible	Yes				
Transparency	1				
Definition					
Suppressed	No				
Material	Aluminum	Polyurethane		Aluminum	Polyurethane
Stiffness Behavior	Flexible				
Nonlinear Material Effects	Yes				
Coordinate System	Global Coordinate System				
Bounding Box					
Length X	180.6 mm	2116.2 mm	1998.1 mm	2338.8 mm	2327.5 mm
Length Y	94.006 mm	3614.6 mm	3410. mm	4000.2 mm	3980.6 mm
Length Z	532.95 mm	1531.7 mm	1457.6 mm	1984. mm	1957.6 mm
Properties					

Volume	6.6335e+006 mm ³	4.1332e+007 mm ³	3.9784e+007 mm ³	1.1316e+007 mm ³	3.501e+007 mm ³
Mass	17.91 kg	9.9198 kg	9.5482 kg	30.554 kg	8.4025 kg
Centroid X	-4.9797e-016 mm	-1128.2 mm	-1075.6 mm	-1182.3 mm	-1410.5 mm
Centroid Y	42.651 mm	1881.3 mm	1790.3 mm	1975. mm	2370.2 mm
Centroid Z	-266.72 mm	-1095.2 mm	-834.01 mm	-1167.5 mm	-1088.2 mm
Moment of Inertia Ip1	4.2744e+005 kg·mm ²	1.5457e+007 kg·mm ²	1.321e+007 kg·mm ²	5.5498e+007 kg·mm ²	2.1104e+007 kg·mm ²
Moment of Inertia Ip2	4.4471e+005 kg·mm ²	31455 kg·mm ²	31513 kg·mm ²	1.6022e+006 kg·mm ²	2.242e+005 kg·mm ²
Moment of Inertia Ip3	43603 kg·mm ²	1.543e+007 kg·mm ²	1.3183e+007 kg·mm ²	5.3908e+007 kg·mm ²	2.0883e+007 kg·mm ²
Statistics					
Nodes	819	2997	2609	2187	14382
Elements	366	1357	1167	785	6399

TABLE 4
Sector 1 > Geometry > Parts

Object Name	Right End Plate Inner Steel Slice	Right End Plate Outer Steel Slice	Left End Plate Downstream Hole Area	Left End Plate Upstream Hole Area	Left End Plate Aluminum Casing
State	Meshed				
Graphics Properties					
Visible	Yes				
Transparency	1				
Definition					
Suppressed	No				
Material	Stainless steel		Polyurethane		Aluminum
Nonlinear Material Effects	Yes				
Coordinate System	Global Coordinate System				
Thickness	1.2192 mm				
Thickness Mode	Manual				
Stiffness Behavior			Flexible		
Bounding Box					
Length X	2294.8 mm		2159.8 mm	1973.8 mm	2338.9 mm
Length Y	3974.8 mm		3690. mm	3368. mm	4000.3 mm
Length Z	1984. mm		1562.8 mm	1437.5 mm	1983.2 mm
Properties					
Volume	2.9149e+006 mm³		4.3107e+007 mm³	3.8462e+007 mm³	1.1673e+007 mm³
Mass	23.319 kg		10.346 kg	9.2309 kg	31.518 kg
Surface Area (approx.)	2.3908e+006 mm²				
Centroid X			1154.5 mm	1054. mm	1178.2 mm
Centroid Y			1927. mm	1752.8 mm	1967.9 mm
Centroid Z			-885.34 mm	-1046.1 mm	-1169. mm
Moment of Inertia Ip1			1.68e+007 kg·mm²	1.2459e+007 kg·mm²	5.695e+007 kg·mm²
Moment of Inertia Ip2			34145 kg·mm²	29271 kg·mm²	1.6077e+006 kg·mm²

Moment of Inertia Ip3			1.677e+007 kg·mm ²	1.2434e+007 kg·mm ²	5.5354e+007 kg·mm ²
Statistics					
Nodes	168	167	3174	2538	2107
Elements	123	122	1444	1132	739

TABLE 5
Sector 1 > Geometry > Parts

Object Name	Left End Plate Polyurethane	Left End Plate Outer Steel Slice	Left End Plate Inner Steel Slice	Back Plate Aluminum Casing	Back Plate Polyurethane
State	Meshed				
Graphics Properties					
Visible	Yes				
Transparency	1				
Definition					
Suppressed	No				
Material	Polyurethane	Stainless steel		Aluminum	Polyurethane
Stiffness Behavior	Flexible			Flexible	
Nonlinear Material Effects	Yes				
Coordinate System	Global Coordinate System				
Thickness		1.2192 mm			
Thickness Mode		Manual			
Bounding Box					
Length X	2327.6 mm	2294.9 mm		4678.4 mm	4655. mm
Length Y	3980.8 mm	3974.9 mm		185.06 mm	179.6 mm
Length Z	1956.7 mm	1983.2 mm		493.9 mm	474.66 mm
Properties					
Volume	3.4557e+007 mm³	2.9149e+006 mm³		5.1666e+006 mm³	1.1129e+008 mm³
Mass	8.2937 kg	23.319 kg		13.95 kg	26.71 kg
Centroid X	1403.5 mm			1.8706e-002 mm	3.6263e-002 mm
Centroid Y	2358.2 mm			3988.7 mm	3988. mm
Centroid Z	-1102.4 mm			-1748. mm	-1750.6 mm
Moment of Inertia Ip1	2.0726e+007 kg·mm²			7.7888e+005 kg·mm²	5.1323e+005 kg·mm²
Moment of Inertia Ip2	2.3631e+005 kg·mm²			3.0062e+007 kg·mm²	4.7331e+007 kg·mm²
Moment of Inertia Ip3	2.0493e+007 kg·mm²			2.9289e+007 kg·mm²	4.6829e+007 kg·mm²
Surface Area (approx.)		2.3908e+006 mm²			
Statistics					
Nodes	13636	170	182	684	1121
Elements	6054	125	137	62	460

TABLE 6
Sector 1 > Geometry > Parts

Object Name	<i>Back Plate Inner Steel Slice</i>	<i>Back Plate Outer Steel Slice</i>	<i>Rod 6</i>	<i>Rod 1</i>	<i>Rod 2</i>
State	Meshed				

Graphics Properties					
Visible	Yes				
Transparency	1				
Definition					
Suppressed	No				
Material	Stainless steel		Carbon fiber		
Nonlinear Material Effects	Yes				
Coordinate System	Global Coordinate System				
Thickness	1.2192 mm				
Thickness Mode	Manual				
Stiffness Behavior			Flexible		
Bounding Box					
Length X	4678.4 mm		3929.6 mm	718.26 mm	1360.5 mm
Length Y	136.19 mm		50.8 mm		
Length Z	480.03 mm		50.8 mm		
Properties					
Volume	2.7943e+006 mm³		7.7065e+005 mm³	1.3612e+005 mm³	2.6303e+005 mm³
Mass	22.354 kg		0.44698 kg	7.8952e-002 kg	0.15256 kg
Surface Area (approx.)	2.2919e+006 mm²				
Centroid X			1.7494e-008 mm	-1.6271e-010 mm	-1.1904e-010 mm
Centroid Y			3355.9 mm	575.17 mm	1131.1 mm
Centroid Z			-1841.7 mm	-785.28 mm	-996.56 mm
Moment of Inertia Ip1			267.95 kg·mm²	47.311 kg·mm²	91.448 kg·mm²
Moment of Inertia Ip2			5.6021e+005 kg·mm²	3118. kg·mm²	22329 kg·mm²
Moment of Inertia Ip3			5.6022e+005 kg·mm²	3118.2 kg·mm²	22329 kg·mm²
Statistics					
Nodes	189	169	42080	13426	8292
Elements	144	124	6000	1980	1176

TABLE 7
Sector 1 > Geometry > Parts

Object Name	Rod 3	Rod 4	Rod 5	Hexcel	Hexcel Outer Carbon Fiber Slice
State	Meshed				Hidden
Graphics Properties					
Visible	Yes				No
Transparency	1				
Definition					
Suppressed	No				
Material	Carbon fiber			Hexcel	Carbon fiber
Stiffness Behavior	Flexible				
Nonlinear Material Effects	Yes				
Coordinate System	Global Coordinate System				

Thickness					0.254 mm
Thickness Mode					Manual
Bounding Box					
Length X	2002.8 mm	2645.1 mm	3287.3 mm	4681.3 mm	4665.4 mm
Length Y	50.8 mm			3974.6 mm	3960.1 mm
Length Z	50.8 mm			1540.7 mm	1504.3 mm
Properties					
Volume	3.8993e+005 mm³	5.1684e+005 mm³	6.4374e+005 mm³	3.9039e+008 mm³	2.5598e+006 mm³
Mass	0.22616 kg	0.29977 kg	0.37337 kg	11.255 kg	1.4847 kg
Centroid X	1.6847e-009 mm	8.4586e-010 mm	-1.798e-009 mm	1.3029e-014 mm	
Centroid Y	1687.3 mm	2243.5 mm	2799.7 mm	2677.4 mm	
Centroid Z	-1207.9 mm	-1419.1 mm	-1630.4 mm	-1023.1 mm	
Moment of Inertia Ip1	135.58 kg·mm²	179.71 kg·mm²	223.84 kg·mm²	1.1686e+007 kg·mm²	
Moment of Inertia Ip2	72640 kg·mm²	1.6906e+005 kg·mm²	3.266e+005 kg·mm²	1.0248e+007 kg·mm²	
Moment of Inertia Ip3	72640 kg·mm²	1.6906e+005 kg·mm²	3.266e+005 kg·mm²	2.1931e+007 kg·mm²	
Surface Area (approx.)					1.0078e+007 mm²
Statistics					
Nodes	21472	28416	35248	20266	344
Elements	3056	4048	5024	9719	292

TABLE 8
Sector 1 > Geometry > Parts

Object Name	Hexcel Inner Carbon Fiber Slice
State	Hidden
Graphics Properties	
Visible	No
Definition	
Suppressed	No
Material	Carbon fiber
Nonlinear Material Effects	Yes
Coordinate System	Global Coordinate System
Thickness	0.254 mm
Thickness Mode	Manual
Bounding Box	
Length X	4665.4 mm
Length Y	3960.9 mm
Length Z	1504.6 mm
Properties	
Volume	2.5599e+006 mm ³
Mass	1.4847 kg
Surface Area(approx.)	1.0078e+007 mm ²
Statistics	
Nodes	353
Elements	300

Coordinate Systems

TABLE 9
Sector 1 > Coordinate Systems > Coordinate System

Object Name	<i>Global Coordinate System</i>
State	Fully Defined
Definition	
Type	Cartesian
Ansys System Number	0.
Origin	
Origin X	0. mm
Origin Y	0. mm
Origin Z	0. mm
Directional Vectors	
X Axis Data	[1. 0. 0.]
Y Axis Data	[0. 1. 0.]
Z Axis Data	[0. 0. 1.]

Connections

TABLE 10
Sector 1 > Connections

Object Name	<i>Connections</i>
State	Fully Defined
Auto Detection	
Generate Contact On Update	Yes
Tolerance Type	Slider
Tolerance Slider	0.
Tolerance Value	16.466 mm
Face/Face	Yes
Face/Edge	No
Edge/Edge	No
Priority	Include All
Same Body Grouping	Yes
Revolute Joints	Yes
Fixed Joints	Yes
Transparency	
Enabled	Yes

TABLE 11
Sector 1 > Connections > Contact Regions

Object Name	<i>Bonded - Nose Plate To Right End Plate Aluminum Casing</i>	<i>Bonded - Nose Plate To Right End Plate Inner Steel Slice</i>	<i>Bonded - Nose Plate To Left End Plate Aluminum Casing</i>	<i>Bonded - Nose Plate To Left End Plate Inner Steel Slice</i>	<i>Bonded - Right End Plate Upstream Hole Area To Right End Plate Polyurethane</i>
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	2 Faces	1 Face	2 Faces	1 Face	4 Faces
Target	2 Faces	1 Face	2 Faces	1 Face	4 Faces

Contact Bodies	Nose Plate				Right End Plate Upstream Hole Area
Target Bodies	Right End Plate Aluminum Casing	Right End Plate Inner Steel Slice	Left End Plate Aluminum Casing	Left End Plate Inner Steel Slice	Right End Plate Polyurethane
Definition					
Type	Bonded				
Scope Mode	Automatic				
Behavior	Symmetric				
Suppressed	No				
Advanced					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				

TABLE 12
Sector 1 > Connections > Contact Regions

Object Name	Bonded - Right End Plate Upstream Hole Area To Right End Plate Inner Steel Slice	Bonded - Right End Plate Upstream Hole Area To Right End Plate Outer Steel Slice	Bonded - Right End Plate Downstream Hole Area To Right End Plate Polyurethane	Bonded - Right End Plate Downstream Hole Area To Right End Plate Inner Steel Slice	Bonded - Right End Plate Downstream Hole Area To Right End Plate Outer Steel Slice
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	1 Face		4 Faces	1 Face	
Target	1 Face		4 Faces	1 Face	
Contact Bodies	Right End Plate Upstream Hole Area		Right End Plate Downstream Hole Area		
Target Bodies	Right End Plate Inner Steel Slice	Right End Plate Outer Steel Slice	Right End Plate Polyurethane	Right End Plate Inner Steel Slice	Right End Plate Outer Steel Slice
Definition					
Type	Bonded				
Scope Mode	Automatic				
Behavior	Symmetric				
Suppressed	No				
Advanced					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				

TABLE 13
Sector 1 > Connections > Contact Regions

Object Name	Bonded - Right End Plate Aluminum Casing To Right End Plate Polyurethane	Bonded - Right End Plate Aluminum Casing To Right End Plate Inner Steel Slice	Bonded - Right End Plate Aluminum Casing To Right End Plate Outer Steel Slice	Bonded - Right End Plate Polyurethane To Right End Plate Inner Steel Slice	Bonded - Right End Plate Polyurethane To Right End Plate Outer Steel Slice
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	4 Faces	1 Face			
Target	4 Faces	1 Face			
Contact Bodies	Right End Plate Aluminum Casing			Right End Plate Polyurethane	
Target Bodies	Right End Plate Polyurethane	Right End Plate Inner Steel Slice	Right End Plate Outer Steel Slice	Right End Plate Inner Steel Slice	Right End Plate Outer Steel Slice
Definition					
Type	Bonded				
Scope Mode	Automatic				
Behavior	Symmetric				
Suppressed	No				
Advanced					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				

TABLE 14
Sector 1 > Connections > Contact Regions

Object Name	<i>Bonded - Left End Plate Downstream Hole Area To Left End Plate Polyurethane</i>	<i>Bonded - Left End Plate Downstream Hole Area To Left End Plate Outer Steel Slice</i>	<i>Bonded - Left End Plate Downstream Hole Area To Left End Plate Inner Steel Slice</i>	<i>Bonded - Left End Plate Upstream Hole Area To Left End Plate Polyurethane</i>	<i>Bonded - Left End Plate Upstream Hole Area To Left End Plate Outer Steel Slice</i>
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	4 Faces	1 Face		4 Faces	1 Face
Target	4 Faces	1 Face		4 Faces	1 Face
Contact Bodies	Left End Plate Downstream Hole Area			Left End Plate Upstream Hole Area	
Target Bodies	Left End Plate Polyurethane	Left End Plate Outer Steel Slice	Left End Plate Inner Steel Slice	Left End Plate Polyurethane	Left End Plate Outer Steel Slice
Definition					

Type	Bonded
Scope Mode	Automatic
Behavior	Symmetric
Suppressed	No
Advanced	
Formulation	Pure Penalty
Normal Stiffness	Program Controlled
Update Stiffness	Never
Thermal Conductance	Program Controlled
Pinball Region	Program Controlled

TABLE 15
Sector 1 > Connections > Contact Regions

Object Name	<i>Bonded - Left End Plate Upstream Hole Area To Left End Plate Inner Steel Slice</i>	<i>Bonded - Left End Plate Aluminum Casing To Left End Plate Polyurethane</i>	<i>Bonded - Left End Plate Aluminum Casing To Left End Plate Outer Steel Slice</i>	<i>Bonded - Left End Plate Aluminum Casing To Left End Plate Inner Steel Slice</i>	<i>Bonded - Left End Plate Polyurethane To Left End Plate Outer Steel Slice</i>
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	1 Face	4 Faces	1 Face		
Target	1 Face	4 Faces	1 Face		
Contact Bodies	Left End Plate Upstream Hole Area	Left End Plate Aluminum Casing			Left End Plate Polyurethane
Target Bodies	Left End Plate Inner Steel Slice	Left End Plate Polyurethane	Left End Plate Outer Steel Slice	Left End Plate Inner Steel Slice	Left End Plate Outer Steel Slice
Definition					
Type	Bonded				
Scope Mode	Automatic				
Behavior	Symmetric				
Suppressed	No				
Advanced					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				

TABLE 16
Sector 1 > Connections > Contact Regions

	<i>Bonded - Left End</i>	<i>Bonded - Back</i>	<i>Bonded - Back</i>	<i>Bonded - Back</i>	<i>Bonded - Back Plate Aluminum</i>
--	--------------------------	----------------------	----------------------	----------------------	-------------------------------------

Object Name	Plate Polyurethane To Left End Plate Inner Steel Slice	Plate Aluminum Casing To Back Plate Polyurethane	Plate Polyurethane To Back Plate Inner Steel Slice	Plate Polyurethane To Back Plate Outer Steel Slice	Casing To Right End Plate Aluminum Casing
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	1 Face	4 Faces	1 Face	3 Faces	1 Edge
Target	1 Face	4 Faces	1 Face		1 Edge
Contact Bodies	Left End Plate Polyurethane	Back Plate Aluminum Casing	Back Plate Polyurethane		Back Plate Aluminum Casing
Target Bodies	Left End Plate Inner Steel Slice	Back Plate Polyurethane	Back Plate Inner Steel Slice	Back Plate Outer Steel Slice	Right End Plate Aluminum Casing
Definition					
Type	Bonded				
Scope Mode	Automatic				Manual
Behavior	Symmetric				
Suppressed	No				
Advanced					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				Radius
Pinball Radius					20. mm

TABLE 17
Sector 1 > Connections > Contact Regions

Object Name	Bonded - Back Plate Aluminum Casing To Left End Plate Aluminum Casing	Bonded - Right End Plate Aluminum Casing To Rod 6	Bonded - Left End Plate Aluminum Casing To Rod 6	Bonded - Back Plate Aluminum Casing To Back Plate Inner Steel Slice	Bonded - Back Plate Aluminum Casing To Back Plate Outer Steel Slice
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	1 Edge	1 Face			
Target	1 Edge	1 Face			
Contact Bodies	Back Plate Aluminum Casing	Right End Plate Aluminum Casing	Left End Plate Aluminum Casing	Back Plate Aluminum Casing	
Target Bodies	Left End Plate Aluminum Casing	Rod 6		Back Plate Inner Steel Slice	Back Plate Outer Steel Slice
Definition					
Type	Bonded				

Scope Mode	Manual	Automatic
Suppressed	No	
Behavior		Symmetric
Advanced		
Formulation	Pure Penalty	
Normal Stiffness	Program Controlled	
Update Stiffness	Never	
Thermal Conductance	Program Controlled	
Pinball Region	Radius	Program Controlled
Pinball Radius	20. mm	

TABLE 18
Sector 1 > Connections > Contact Regions

Sector 1 > Connections > Contact Regions					
Object Name	Bonded - Nose Plate To Right End Plate Polyurethane	Bonded - Nose Plate To Left End Plate Polyurethane	Bonded - Right End Plate Aluminum Casing To Rod 1	Bonded - Right End Plate Aluminum Casing To Rod 2	Bonded - Right End Plate Aluminum Casing To Rod 3
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	2 Faces		1 Face		
Target	2 Faces		1 Face		
Contact Bodies	Nose Plate		Right End Plate Aluminum Casing		
Target Bodies	Right End Plate Polyurethane	Left End Plate Polyurethane	Rod 1	Rod 2	Rod 3
Definition					
Type	Bonded				
Scope Mode	Automatic				
Behavior	Symmetric				
Suppressed	No				
Advanced					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				

TABLE 19
Sector 1 > Connections > Contact Regions

Sector 1 - Connections - Contact Regions					
Object Name	<i>Bonded - Right End Plate Aluminum Casing To Rod 4</i>	<i>Bonded - Right End Plate Aluminum Casing To Rod 5</i>	<i>Bonded - Left End Plate Aluminum Casing To Rod 1</i>	<i>Bonded - Left End Plate Aluminum Casing To Rod 2</i>	<i>Bonded - Left End Plate Aluminum Casing To Rod 3</i>
State	Fully Defined				
Scope					

Scoping Method	Geometry Selection				
Contact	1 Face				
Target	1 Face				
Contact Bodies	Right End Plate Aluminum Casing		Left End Plate Aluminum Casing		
Target Bodies	Rod 4	Rod 5	Rod 1	Rod 2	Rod 3
Definition					
Type	Bonded				
Scope Mode	Automatic				
Behavior	Symmetric				
Suppressed	No				
Advanced					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				

TABLE 20
Sector 1 > Connections > Contact Regions

Object Name	Bonded - Left End Plate Aluminum Casing To Rod 4	Bonded - Left End Plate Aluminum Casing To Rod 5	Bonded - Right End Plate Inner Steel Slice To Hexcel	Bonded - Left End Plate Aluminum Casing To Hexcel	Bonded - Back Plate Aluminum Casing To Hexcel
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	1 Face				1 Edge
Target	1 Face				1 Edge
Contact Bodies	Left End Plate Aluminum Casing		Right End Plate Inner Steel Slice	Left End Plate Aluminum Casing	Back Plate Aluminum Casing
Target Bodies	Rod 4	Rod 5	Hexcel		
Definition					
Type	Bonded				
Scope Mode	Automatic		Manual		
Behavior	Symmetric				
Suppressed	No				
Advanced					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled		Radius		Program Controlled
Pinball Radius			5. mm		

TABLE 21
Sector 1 > Connections > Contact Regions

Sector 1 > Connections > Contact Regions					
Object Name	Bonded - Left End Plate Aluminum Casing To Hexcel	Bonded - Right End Plate Polyurethane To Right End Plate Outer Steel Slice	Bonded - Back Plate Polyurethane To Back Plate Outer Steel Slice	Bonded - Hexcel Inner Carbon Fiber Slice To Hexcel	Bonded - Hexcel Outer Carbon Fiber Slice To Hexcel
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	1 Edge	1 Face			
Target	1 Edge	1 Face			
Contact Bodies	Left End Plate Aluminum Casing	Right End Plate Polyurethane	Back Plate Polyurethane	Hexcel Inner Carbon Fiber Slice	Hexcel Outer Carbon Fiber Slice
Target Bodies	Hexcel	Right End Plate Outer Steel Slice	Back Plate Outer Steel Slice	Hexcel	
Definition					
Type	Bonded				
Scope Mode	Manual				
Suppressed	No				
Behavior		Symmetric			
Advanced					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				

TABLE 22
Sector 1 > Connections > Contact Regions

Sector 1 > Connections > Contact Regions					
Object Name	Contact Region 56	Contact Region 57	Contact Region 58	Contact Region 59	Contact Region 60
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	1 Face				
Target	1 Face				
Contact Bodies	Right End Plate Aluminum Casing	Right End Plate Polyurethane	Right End Plate Inner Steel Slice	Left End Plate Aluminum Casing	Left End Plate Polyurethane
Target Bodies	Hexcel				
Definition					
Type	Bonded				
Scope Mode	Automatic				
Behavior	Symmetric				
Suppressed	No				
Advanced					
Formulation	Pure Penalty				
Normal	Program Controlled				

Stiffness	
Update Stiffness	Never
Thermal Conductance	Program Controlled
Pinball Region	Program Controlled

TABLE 23
Sector 1 > Connections > Contact Regions

Sector 1 > Connections > Contact Regions					
Object Name	Contact Region 61	Contact Region 62	Contact Region 63	Contact Region 64	Contact Region 65
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Contact	1 Face	2 Faces	1 Face		
Target	1 Face	2 Faces	1 Face		
Contact Bodies	Left End Plate Inner Steel Slice	Back Plate Aluminum Casing	Back Plate Polyurethane	Back Plate Inner Steel Slice	Hexcel
Target Bodies	Hexcel				Hexcel Outer Carbon Fiber Slice
Definition					
Type	Bonded				
Scope Mode	Automatic				
Behavior	Symmetric				
Suppressed	No				
Advanced					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				

TABLE 24
Sector 1 > Connections > Contact Regions

Sector 1 - Connections - Contact Regions		
Object Name	Contact Region 66	Contact Region 67
State	Fully Defined	
Scope		
Scoping Method	Geometry Selection	
Contact	1 Face	
Target	1 Face	
Contact Bodies	Hexcel	Hexcel Outer Carbon Fiber Slice
Target Bodies	Hexcel Inner Carbon Fiber Slice	
Definition		
Type	Bonded	
Scope Mode	Automatic	
Behavior	Symmetric	
Suppressed	No	
Advanced		
Formulation	Pure Penalty	
Normal Stiffness	Program Controlled	

Update Stiffness	Never
Thermal Conductance	Program Controlled
Pinball Region	Program Controlled

Mesh

TABLE 25
Sector 1 > Mesh

Object Name	<i>Mesh</i>
State	Solved
Defaults	
Physics Preference	Mechanical
Relevance	-35
Advanced	
Relevance Center	Coarse
Element Size	Default
Shape Checking	Standard Mechanical
Solid Element Midside Nodes	Program Controlled
Straight Sided Elements	No
Initial Size Seed	Active Assembly
Smoothing	Low
Transition	Fast
Statistics	
Nodes	217196
Elements	52335

TABLE 26
Sector 1 > Mesh > Mesh Controls

Object Name	Refinement 2	Refinement 4	Refinement
State	Fully Defined		
Scope			
Scoping Method	Geometry Selection		
Geometry	6 Faces	2 Faces	6 Faces
Definition			
Suppressed	No		
Refinement	1		

Static Structural

TABLE 27
Sector 1 > Analysis

Object Name	<i>Static Structural</i>
State	Fully Defined
Definition	
Physics Type	Structural
Analysis Type	Static Structural
Options	
Reference Temp	22. °C

TABLE 28
Sector 1 > Static Structural > Analysis Settings

Object Name	<i>Analysis Settings</i>
State	Fully Defined
Step Controls	
Number Of Steps	1.
Current Step Number	1.
Step End Time	1. s
Auto Time Stepping	Program Controlled
Solver Controls	
Solver Type	Direct
Weak Springs	Program Controlled
Large Deflection	Off
Inertia Relief	Off
Nonlinear Controls	
Force Convergence	Program Controlled
Moment Convergence	Program Controlled
Displacement Convergence	Program Controlled
Rotation Convergence	Program Controlled
Line Search	Program Controlled
Output Controls	
Calculate Stress	Yes
Calculate Strain	Yes
Calculate Results At	All Time Points
Analysis Data Management	
Solver Files Directory	C:\Documents and Settings\Jinnuri\Desktop\website\AI slit\change of directions\2 Simulation Files\Static Structural\
Future Analysis	None
Save ANSYS db	No
Delete Unneeded Files	Yes
Nonlinear Solution	No

FIGURE 1
Sector 1 > Static Structural > Figure

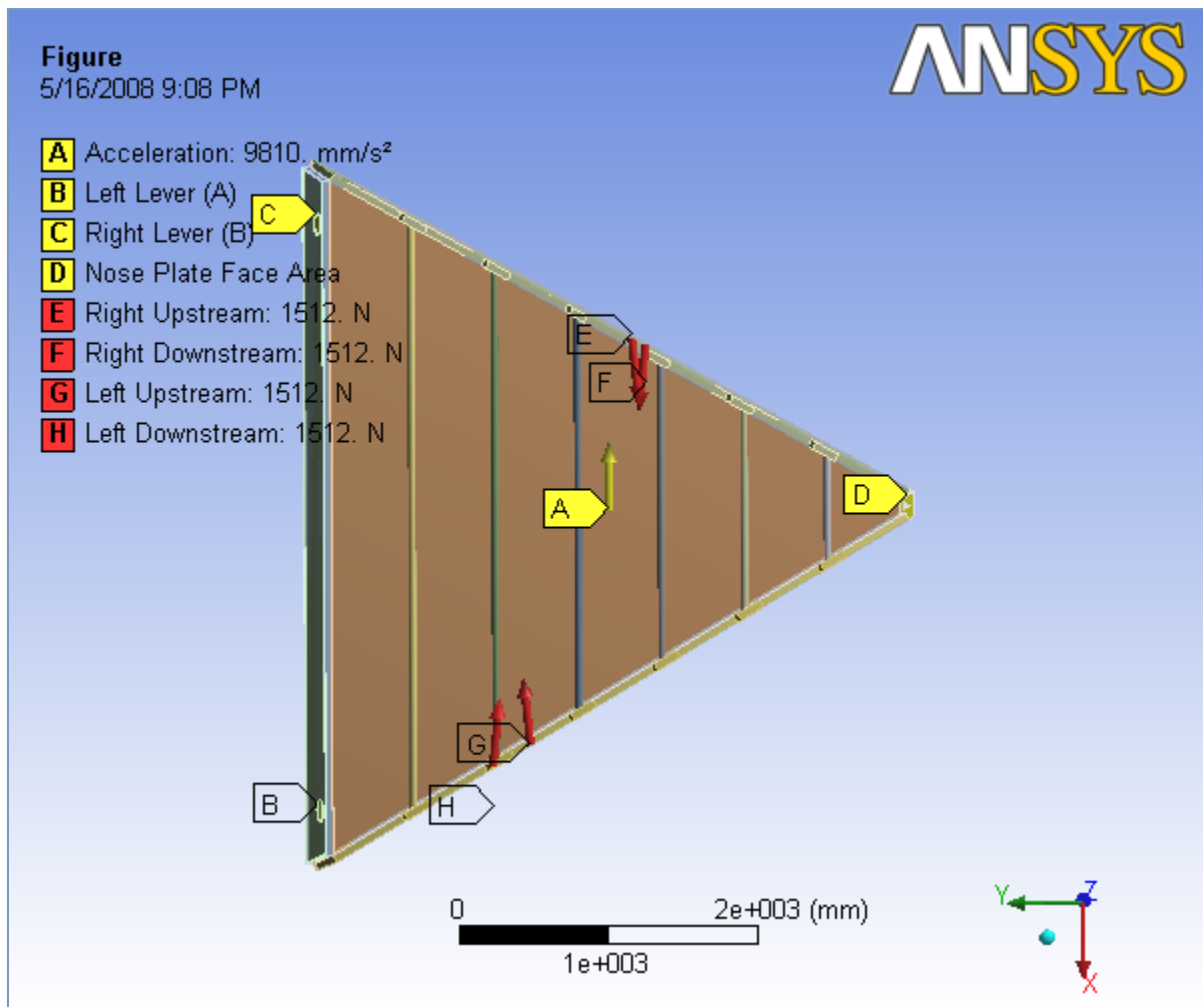


TABLE 29
Sector 1 > Static Structural > Accelerations

Object Name	Acceleration
State	Fully Defined
Scope	
Geometry	All Bodies
Definition	
Define By	Vector
Magnitude	9810. mm/s ² (ramped)
Direction	Defined
Suppressed	No

FIGURE 2
Sector 1 > Static Structural > Acceleration

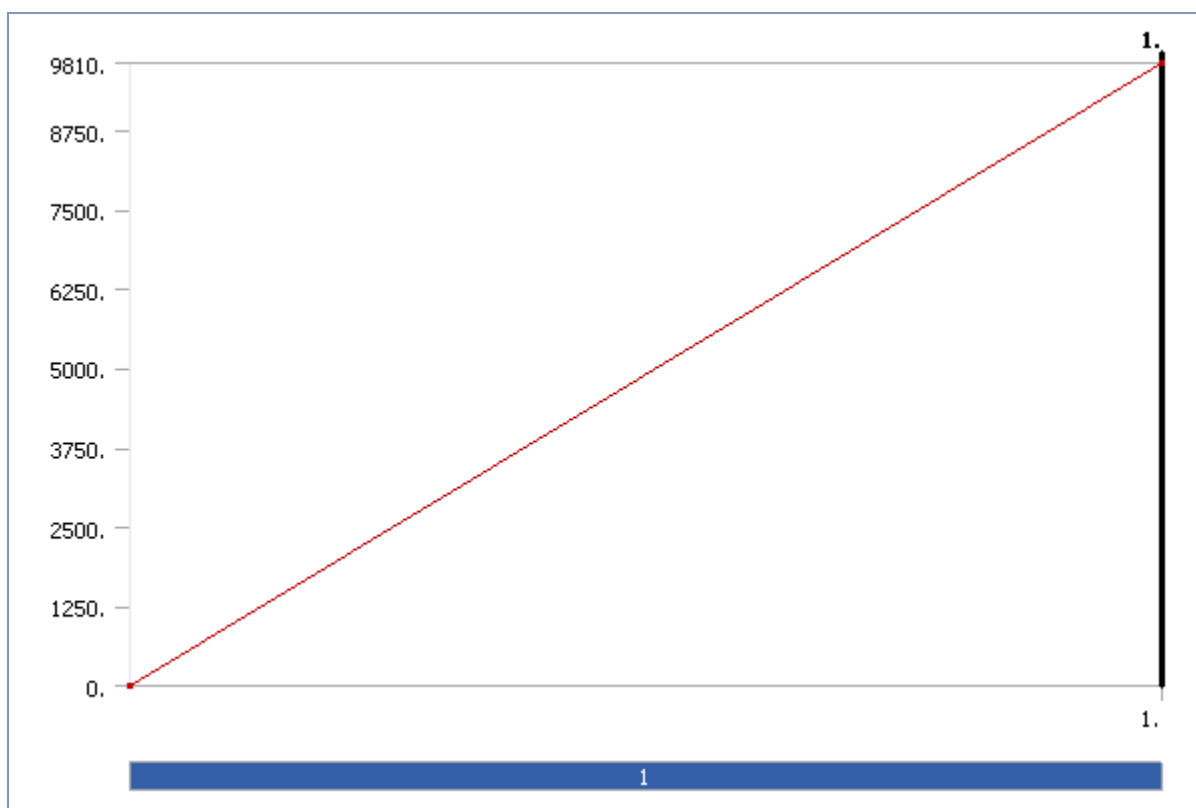


TABLE 30
Sector 1 > Static Structural > Loads

Object Name	<i>Left Lever (A)</i>	<i>Right Lever (B)</i>	<i>Nose Plate Face Area</i>	<i>Right Upstream</i>	<i>Right Downstream</i>
State	Fully Defined				
Scope					
Scoping Method	Geometry Selection				
Geometry	1 Face				
Definition					
Define By	Components				
Type	Displacement			Force	
Coordinate System	Global Coordinate System				
X Component	Free	0. mm (ramped)		1503.7 N (ramped)	
Y Component	0. mm (ramped)	Free		-158.05 N (ramped)	158.05 N (ramped)
Z Component	0. mm (ramped)			0. N (ramped)	
Suppressed	No				

FIGURE 3
Sector 1 > Static Structural > Left Lever (A)

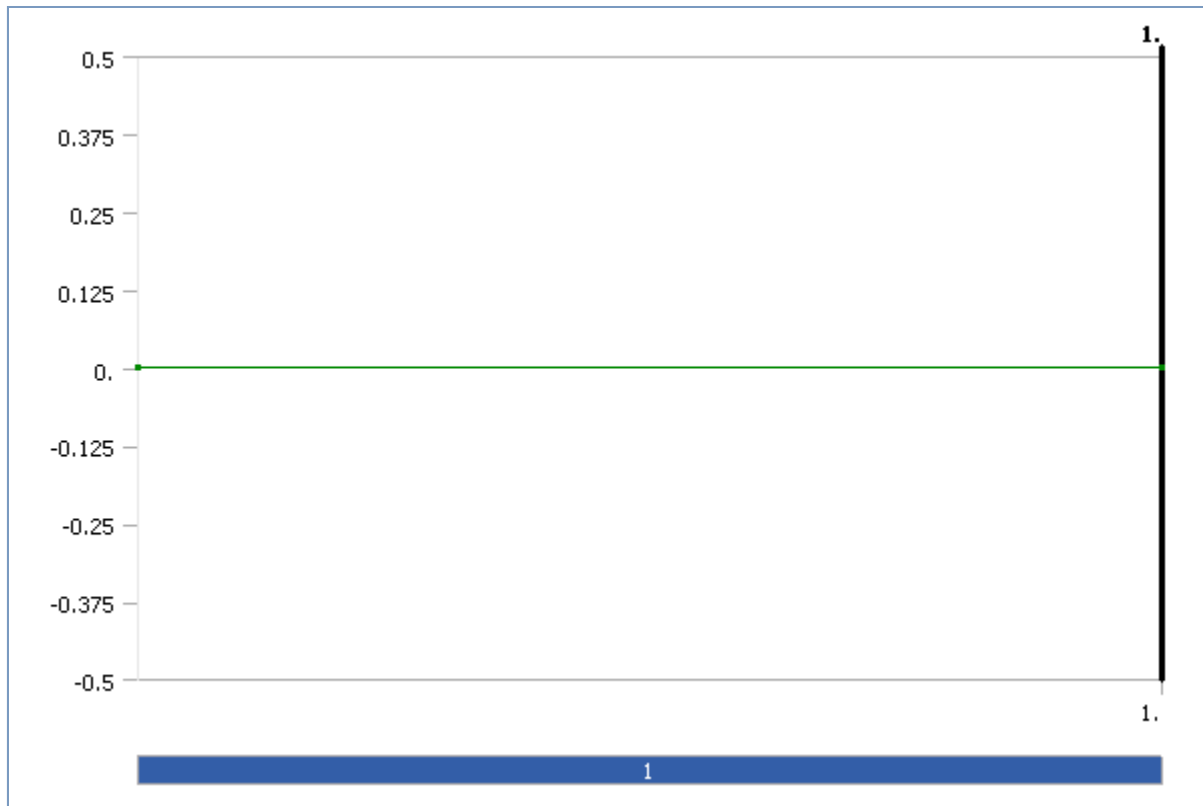


FIGURE 4
Sector 1 > Static Structural > Right Lever (B)

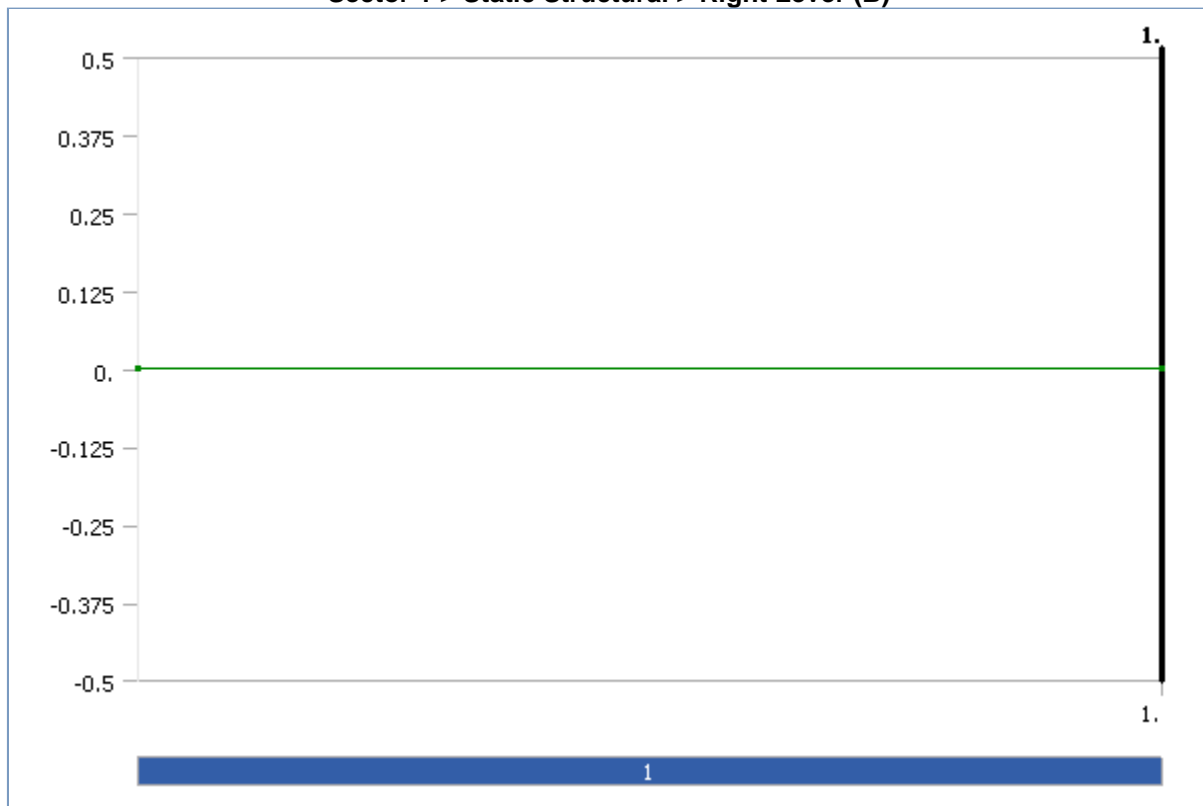


FIGURE 5
Sector 1 > Static Structural > Nose Plate Face Area



FIGURE 6
Sector 1 > Static Structural > Right Upstream

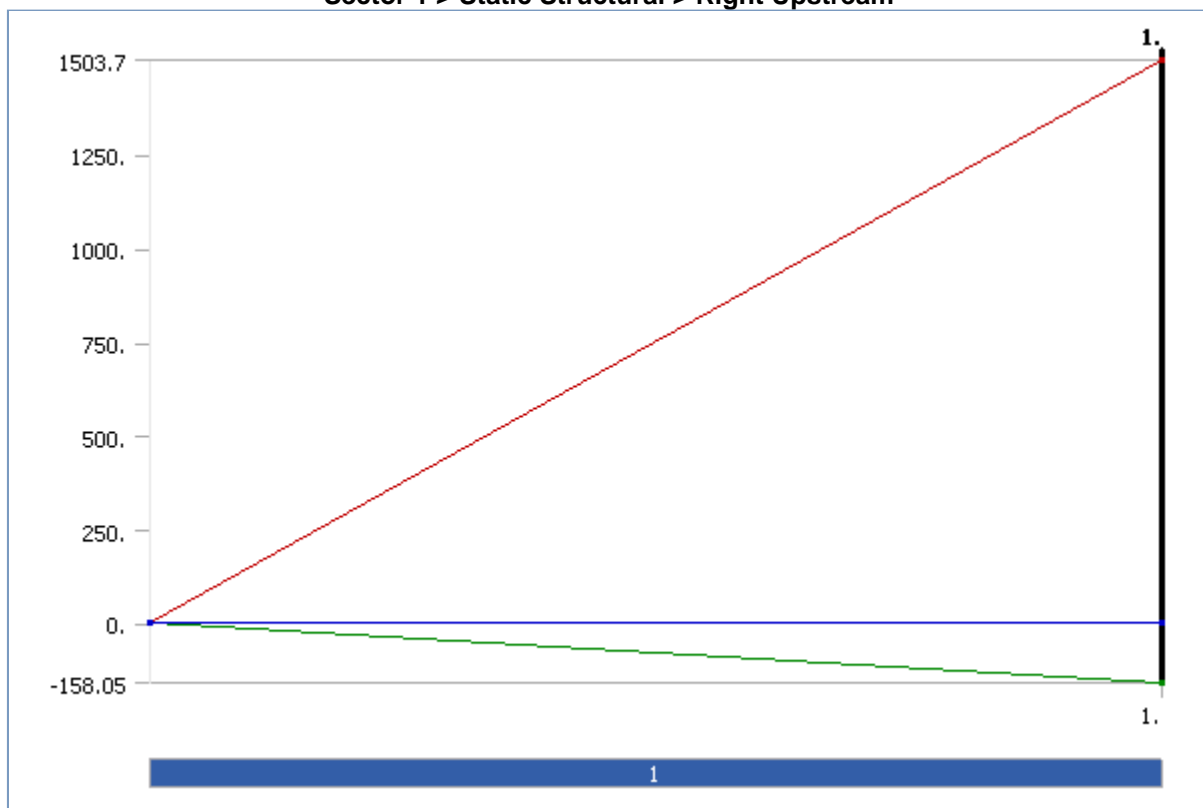


FIGURE 7
Sector 1 > Static Structural > Right Downstream

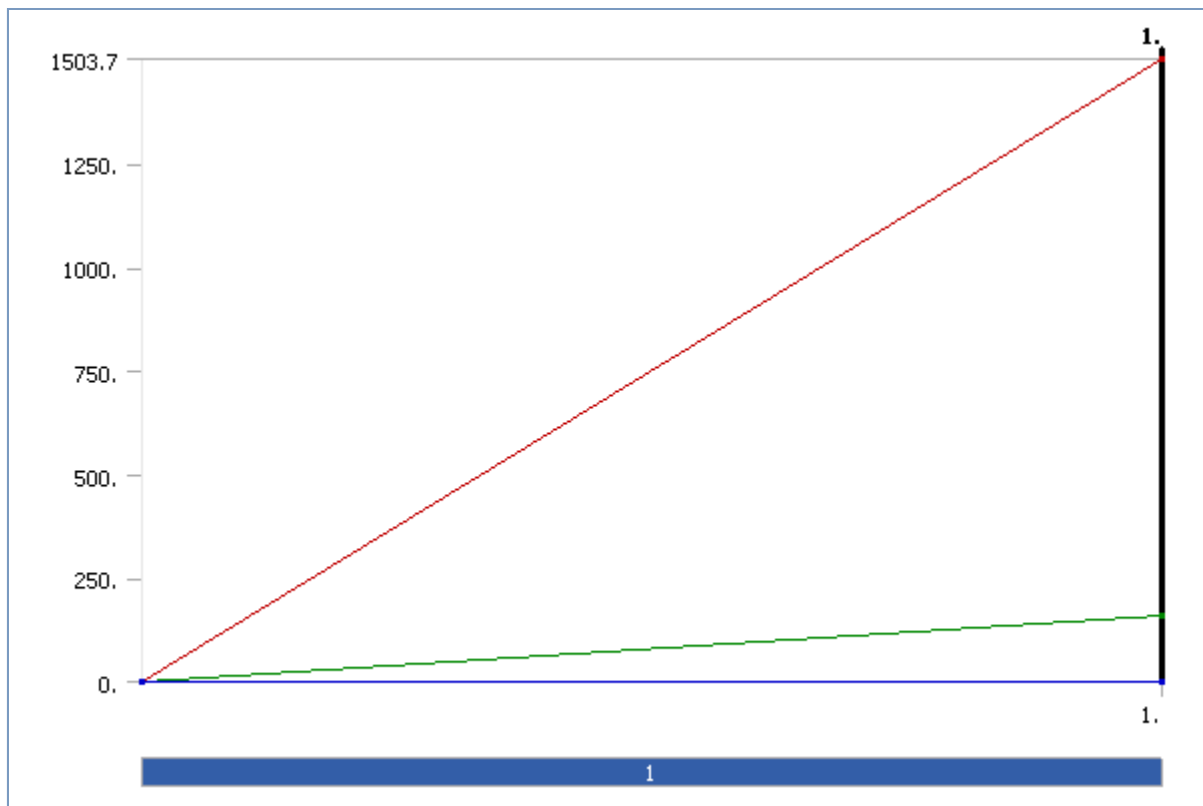


TABLE 31
Sector 1 > Static Structural > Loads

Object Name	Left Upstream	Left Downstream
State	Fully Defined	
Scope		
Scoping Method	Geometry Selection	
Geometry	1 Face	
Definition		
Define By	Components	
Type	Force	
Coordinate System	Global Coordinate System	
X Component	-1503.7 N (ramped)	
Y Component	158.05 N (ramped)	-158.05 N (ramped)
Z Component	0. N (ramped)	
Suppressed	No	

FIGURE 8
Sector 1 > Static Structural > Left Upstream


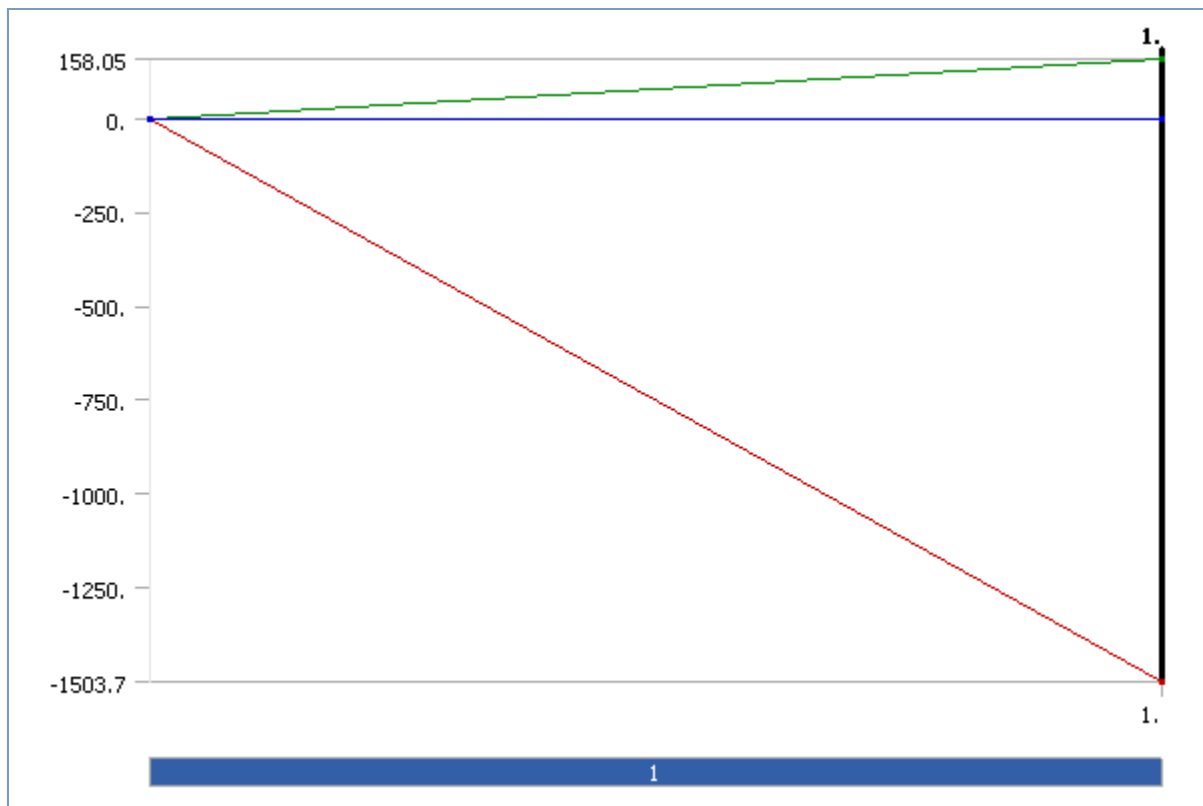


FIGURE 9
Sector 1 > Static Structural > Left Downstream

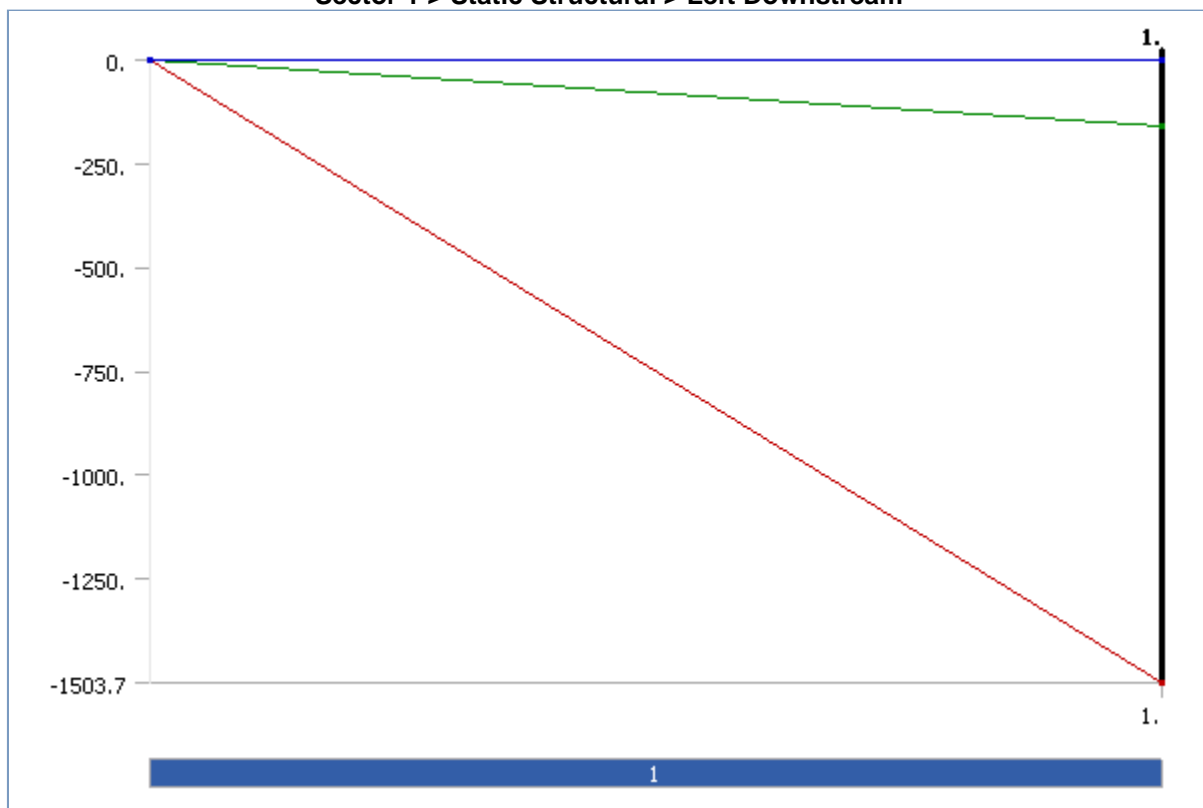

Solution

TABLE 32
Sector 1 > Static Structural > Solution

Object Name	<i>Solution</i>
State	Solved
Adaptive Mesh Refinement	
Max Refinement Loops	1.
Refinement Depth	2.

TABLE 33
Sector 1 > Static Structural > Solution > Solution Information

Object Name	<i>Solution Information</i>
State	Solved
Solution Information	
Solution Output	Solver Output
Newton-Raphson Residuals	0
Update Interval	2.5 s
Display Points	All

TABLE 34
Sector 1 > Static Structural > Solution > Results

Object Name	Total Deformation	X - Directional Deformation	Y - Directional Deformation	Z - Directional Deformation	Equivalent Stress
State	Solved				
Scope					
Geometry	All Bodies				
Definition					
Type	Total Deformation	Directional Deformation			Equivalent (von-Mises) Stress
Display Time	End Time				
Orientation		X Axis	Y Axis	Z Axis	
Coordinate System		Global Coordinate System			
Shell					Top/Bottom
Results					
Minimum	7.4017e-003 mm	-1.2048e-003 mm	-0.10224 mm	-8.8486e-002 mm	2.9692e-005 MPa
Maximum	0.22294 mm	0.19293 mm	0.13703 mm	4.7387e-002 mm	4.4993 MPa
Minimum Occurs On	Left End Plate Aluminum Casing	Left End Plate Upstream Hole Area	Rod 5		Hexcel
Maximum Occurs On	Right End Plate Aluminum Casing		Rod 6	Rod 5	Rod 2
Information					
Time	1. s				
Load Step	1				
Substep	1				
Iteration Number	1				

FIGURE 10
Sector 1 > Static Structural > Solution > Total Deformation > Figure

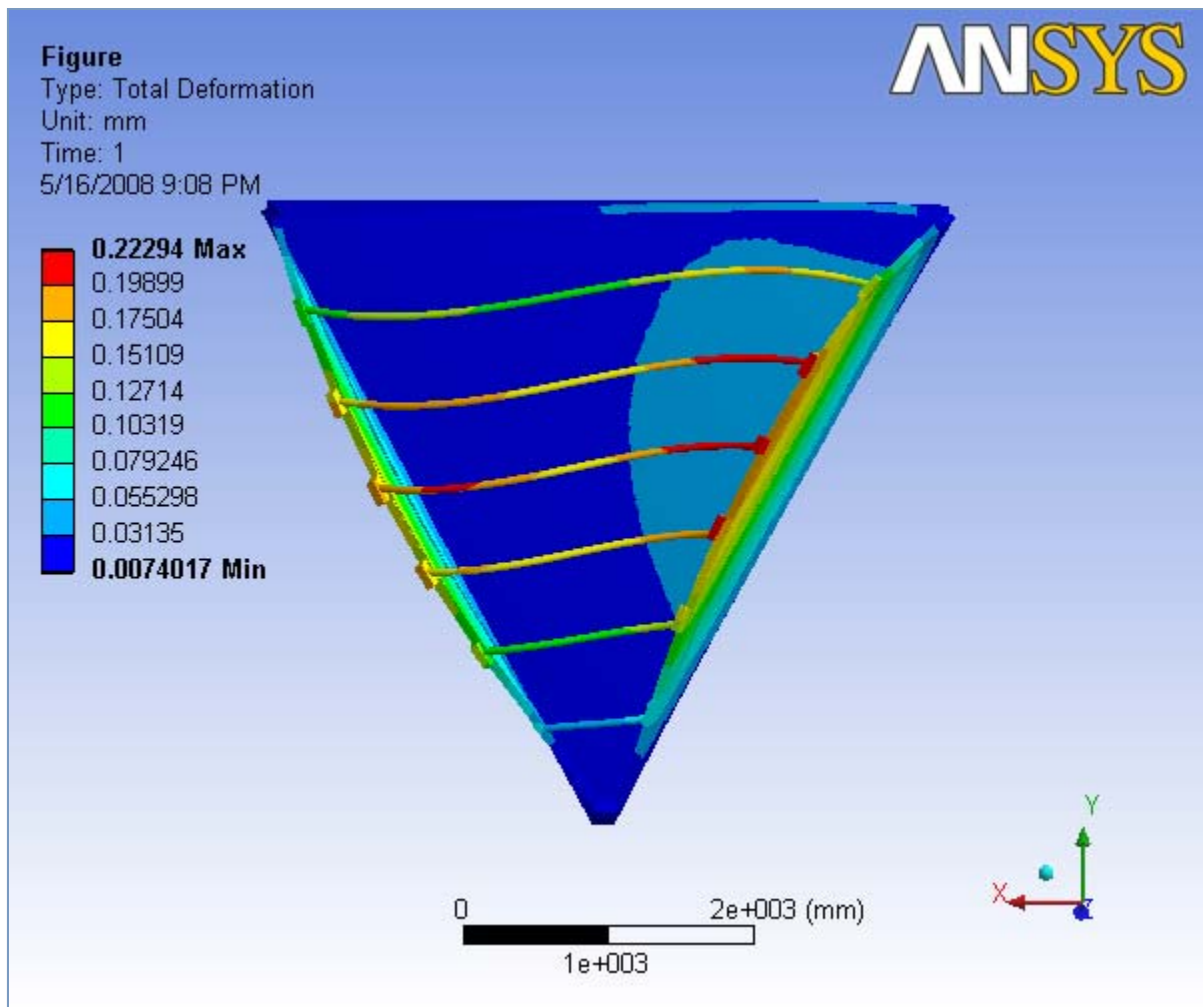


FIGURE 11
Sector 1 > Static Structural > Solution > X - Directional Deformation > Figure

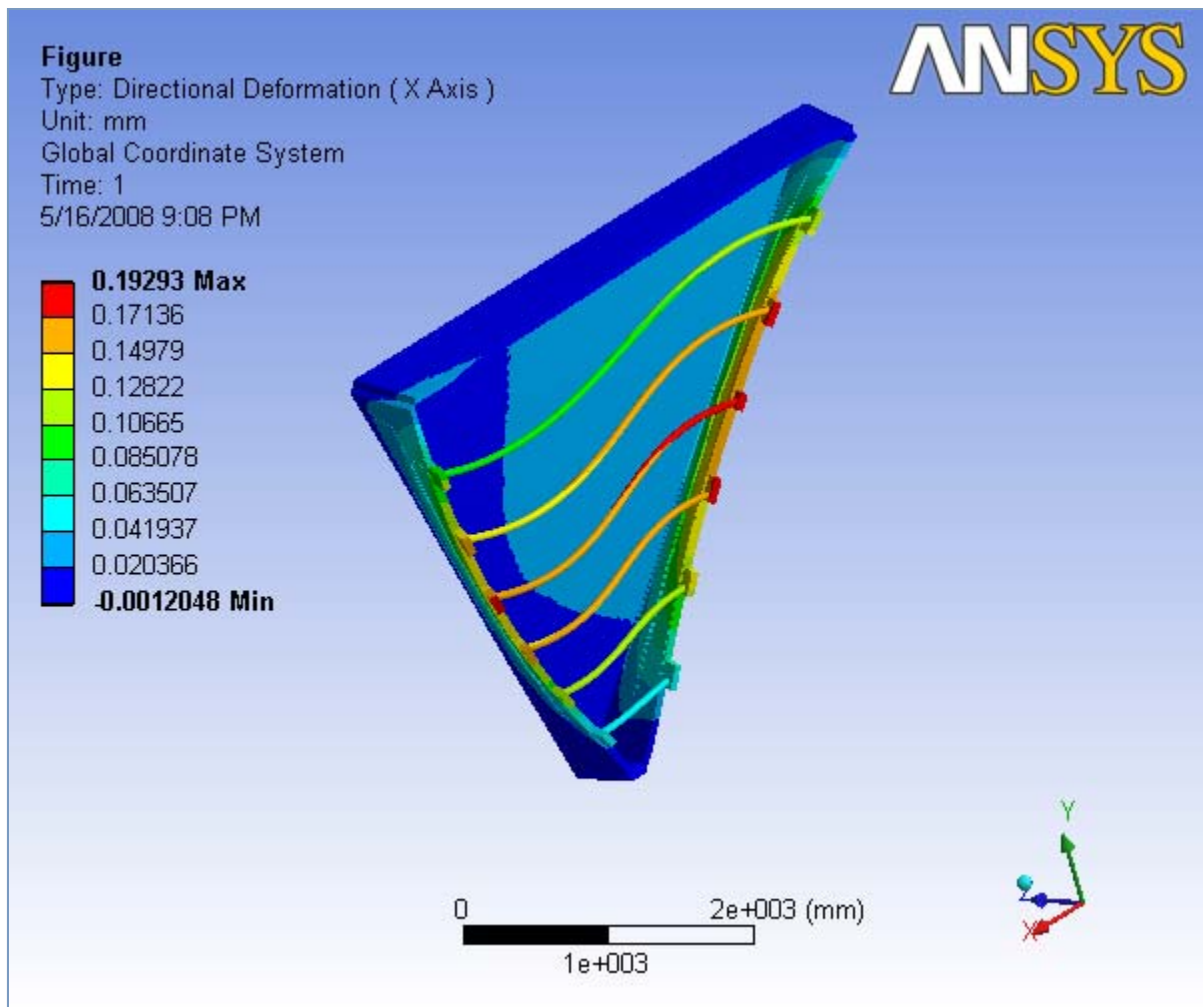


FIGURE 12
 Sector 1 > Static Structural > Solution > Y - Directional Deformation > Figure

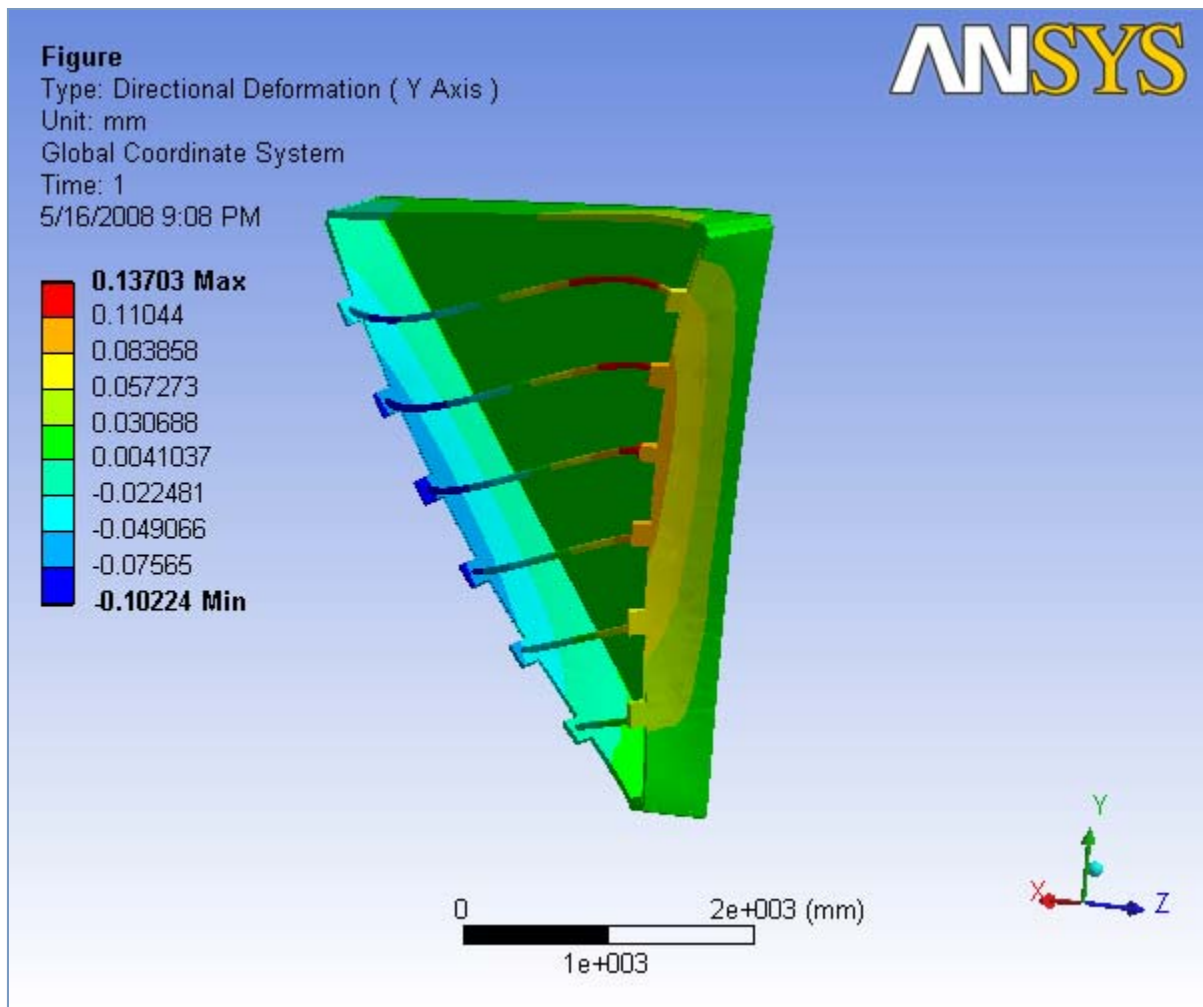


FIGURE 13
Sector 1 > Static Structural > Solution > Z - Directional Deformation > Figure

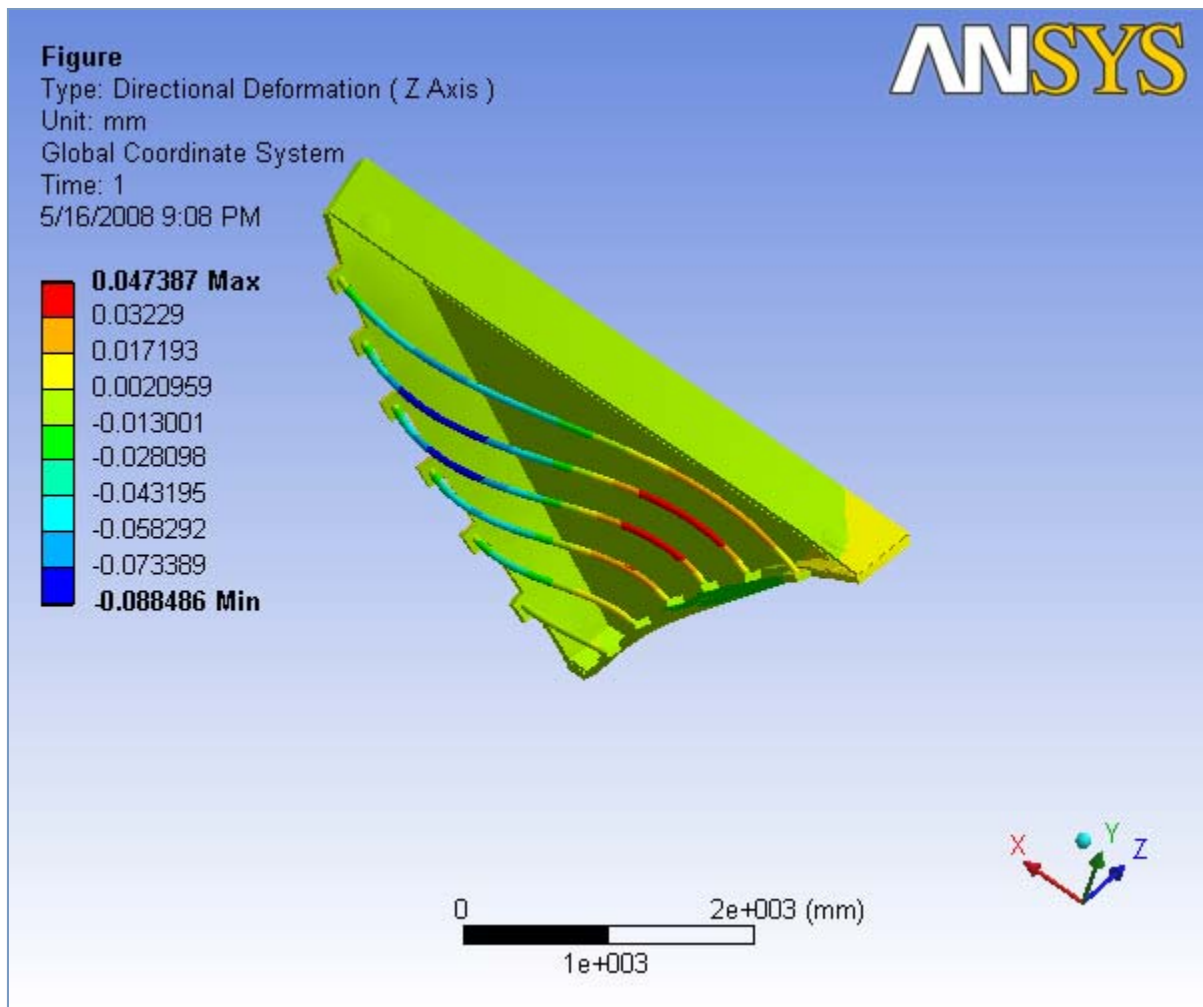


FIGURE 14
Sector 1 > Static Structural > Solution > Equivalent Stress > Figure


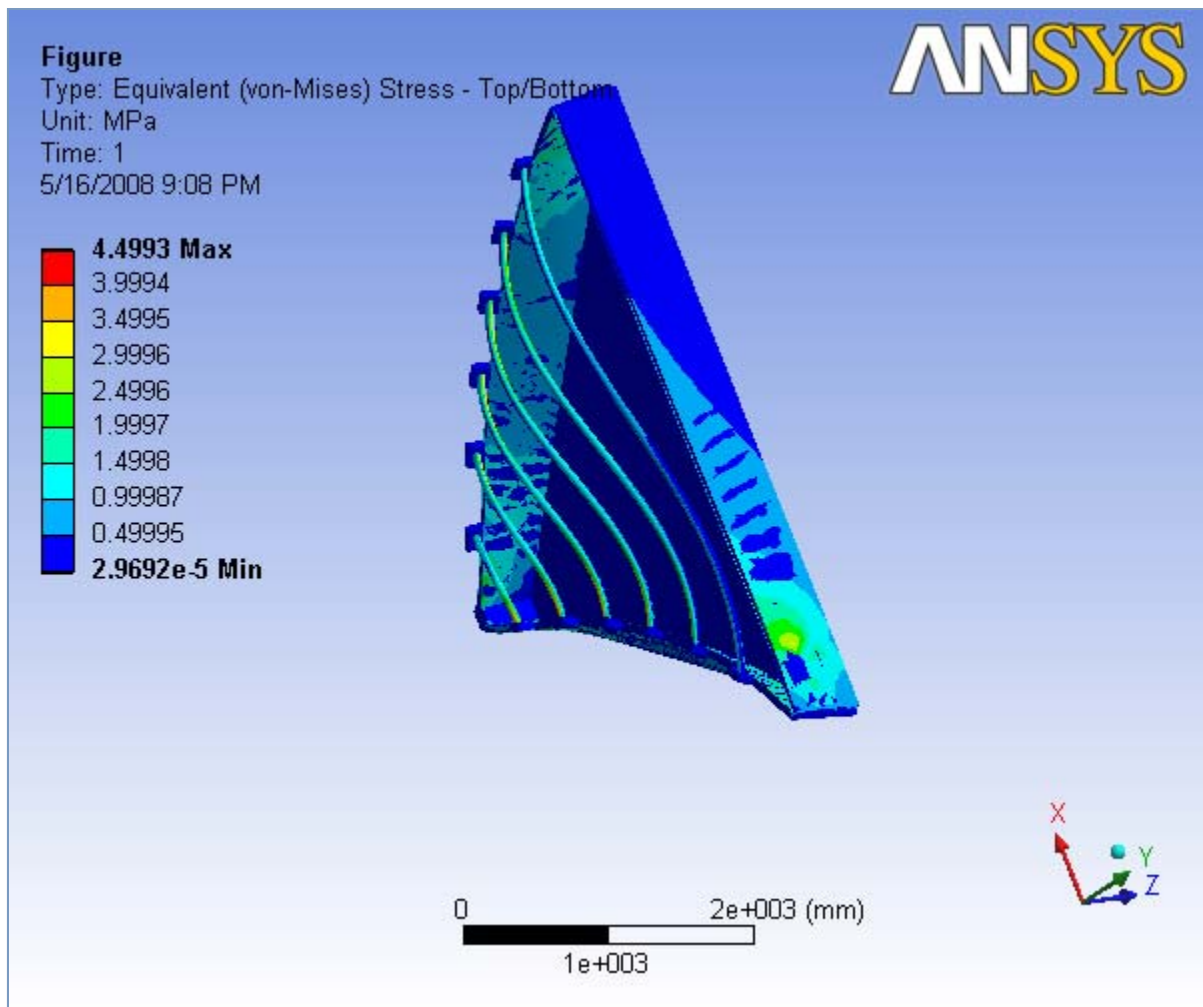


TABLE 35
Sector 1 > Static Structural > Solution > Results

Object Name	<i>Equivalent Elastic Strain</i>
State	Solved
Scope	
Geometry	All Bodies
Definition	
Type	Equivalent (von-Mises) Elastic Strain
Shell	Top/Bottom
Display Time	End Time
Results	
Minimum	6.197e-008 mm/mm
Maximum	1.0337e-003 mm/mm
Minimum Occurs On	Back Plate Aluminum Casing
Maximum Occurs On	Back Plate Polyurethane
Information	
Time	1. s
Load Step	1
Substep	1
Iteration Number	1

FIGURE 15

Sector 1 > Static Structural > Solution > Equivalent Elastic Strain > Figure

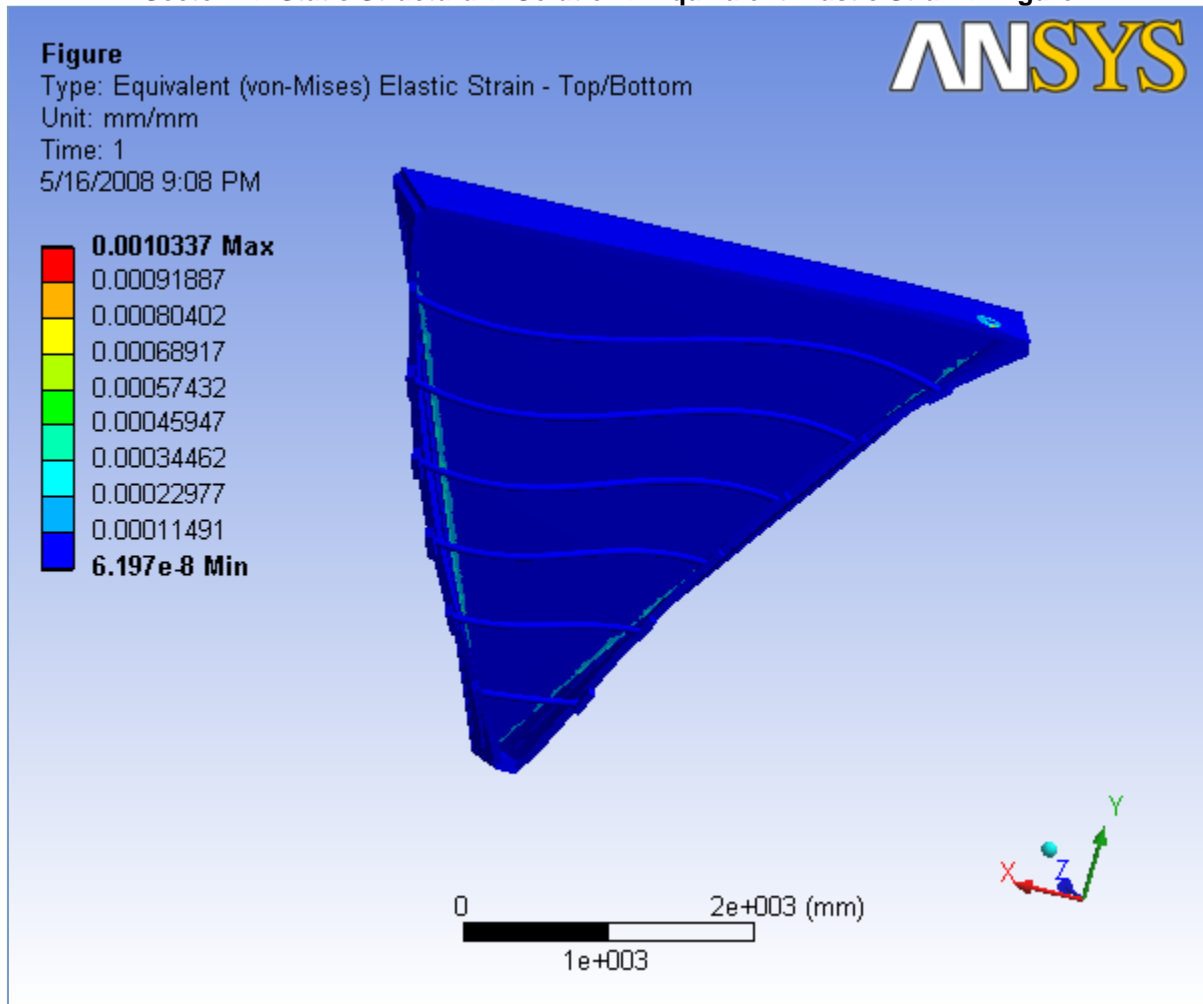

Material Data

Aluminum

TABLE 36
Aluminum > Constants

Structural	
Young's Modulus	68900 MPa
Poisson's Ratio	0.33
Density	2.7e-006 kg/mm ³
Thermal Expansion	2.3e-005 1/°C
Thermal	
Thermal Conductivity	0. W/mm·°C
Specific Heat	0. J/kg·°C
Electromagnetics	
Relative Permeability	0.
Resistivity	0. Ohm-mm

Polyurethane

TABLE 37
Polyurethane > Constants

Structural	
Young's Modulus	66. MPa
Poisson's Ratio	0.3
Density	2.4e-007 kg/mm ³
Thermal Expansion	6.12e-005 1/°C
Thermal	
Thermal Conductivity	0. W/mm·°C
Specific Heat	0. J/kg·°C
Electromagnetics	
Relative Permeability	0.
Resistivity	0. Ohm·mm

Stainless steel

TABLE 38
Stainless steel > Constants

Structural	
Young's Modulus	1.93e+005 MPa
Poisson's Ratio	0.3
Density	8.e-006 kg/mm ³
Thermal Expansion	0. 1/°C
Thermal	
Thermal Conductivity	0. W/mm·°C
Specific Heat	0. J/kg·°C
Electromagnetics	
Relative Permeability	0.
Resistivity	0. Ohm·mm

Carbon fiber

TABLE 39
Carbon fiber > Constants

Structural	
Young's Modulus	1.5e+005 MPa
Poisson's Ratio	0.3
Density	5.8e-007 kg/mm ³
Thermal Expansion	0. 1/°C
Thermal	
Thermal Conductivity	0. W/mm·°C
Specific Heat	0. J/kg·°C
Electromagnetics	
Relative Permeability	0.
Resistivity	0. Ohm·mm

Hexcel

TABLE 40
Hexcel > Constants

Structural	
-------------------	--

Young's Modulus	30. MPa
Poisson's Ratio	0.33
Density	2.883e-008 kg/mm ³
Thermal Expansion	0. 1/°C
Thermal	
Thermal Conductivity	0. W/mm·°C
Specific Heat	0. J/kg·°C
Electromagnetics	
Relative Permeability	0.
Resistivity	0. Ohm·mm