


Rev:	Date	By	Chk	Description
-	-	-	-	-

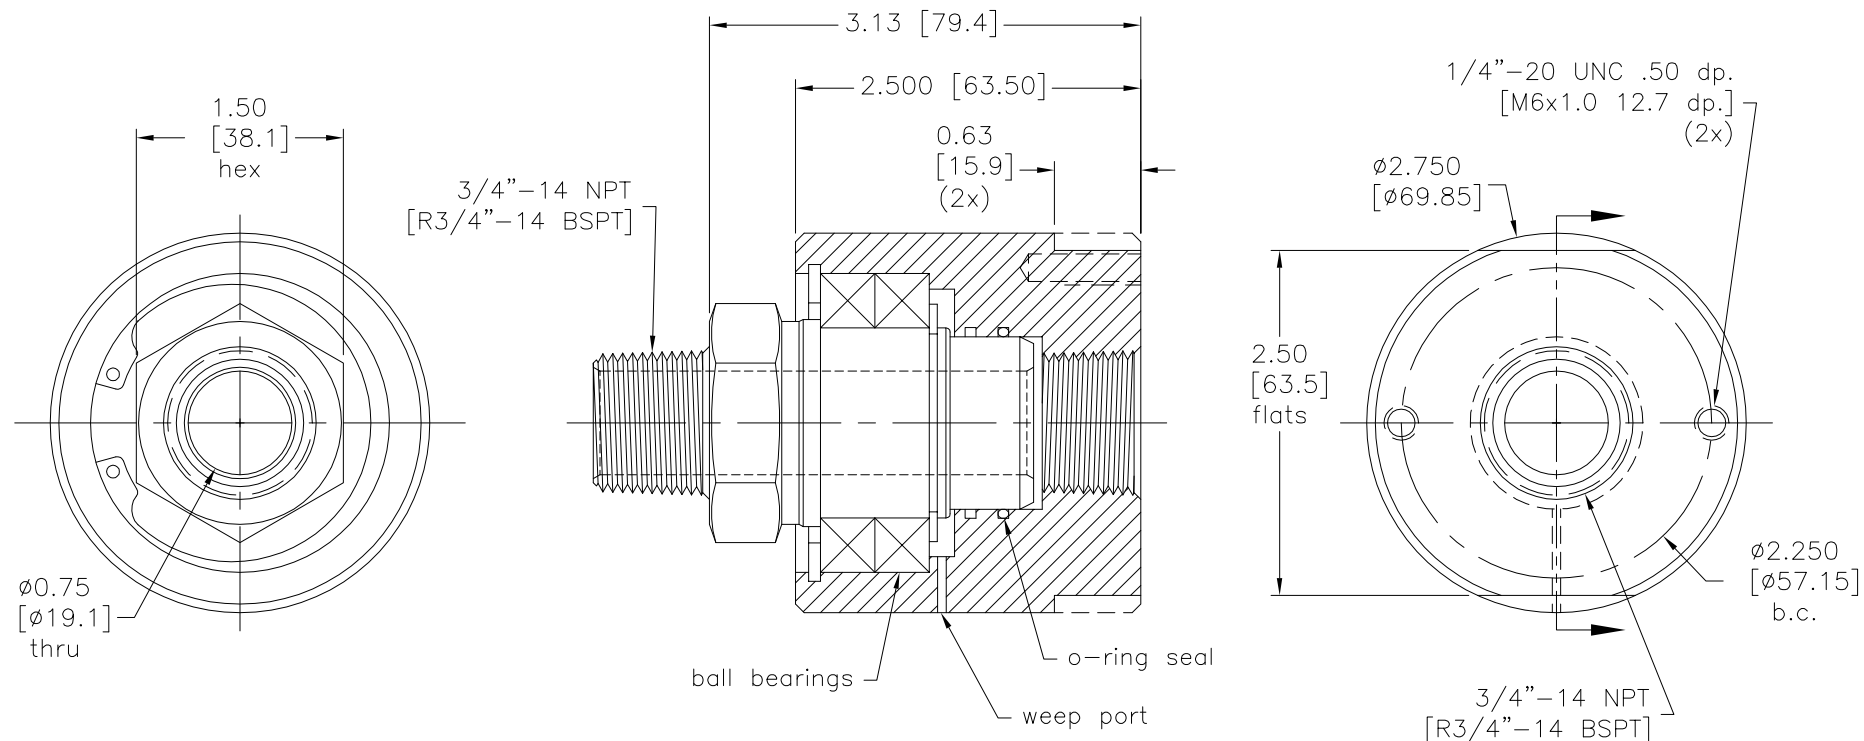

Notes:

1. Union will be rotated for seal break-in and static air tested.
2. Media must be filtered, clean and free of abrasive content or reduced union life will result.
3. Alternate metric units and threads are available by using SPSM in place of SPS in the series designation prefix.

Drawn	KCP	3/15/11
Checked	RAW	3/17/11
Checked	PJE	3/21/11

TOLERANCE EXCEPT AS NOTED
X.X $\pm .125$
X.XX $\pm .015$
X.XXX $\pm .005$
ANGLES $\pm 0.5^\circ$



CUSTOMER APPROVAL/DATE:

SHAFT MTL/PLTING:

304 SSTL

HOUSING MTL/PLTING:

6061 ALUM
BLUE ANODIZE

CUSTOMER:

STOCK


P/N:

SPS-5510

REV:

A

THIRD ANGLE PROJECTION:



THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES, INC. (DSTI) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT'S CONTENTS, IN WHOLE OR PART, SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM DSTI.