




Data Sheet

Generic Specifications SCIONIX Ruggedized Detectors

Integral ruggedized detectors are characterized by special packing of the scintillation crystal with provisions to protect PMT and crystals against shocks and sudden temperature transitions. In general ruggedized detectors do not exceed sizes of 76 mm in diameter.

Scintillation Crystals	:	Nal(Tl), CsI(Na), CsI(Tl), BGO
Temperature Range	:	-40 to + 65 degrees C
Vibrations	:	5G RMS on 3 axis
Shocks	:	100 G
Electrical	:	Voltage Dividers, preamplifiers, spectroscopic amplifiers and High Voltage generators.
Environmental	:	All Rugged detectors meet the IP54 spec. On request provisions to meet IP 68 can be included.

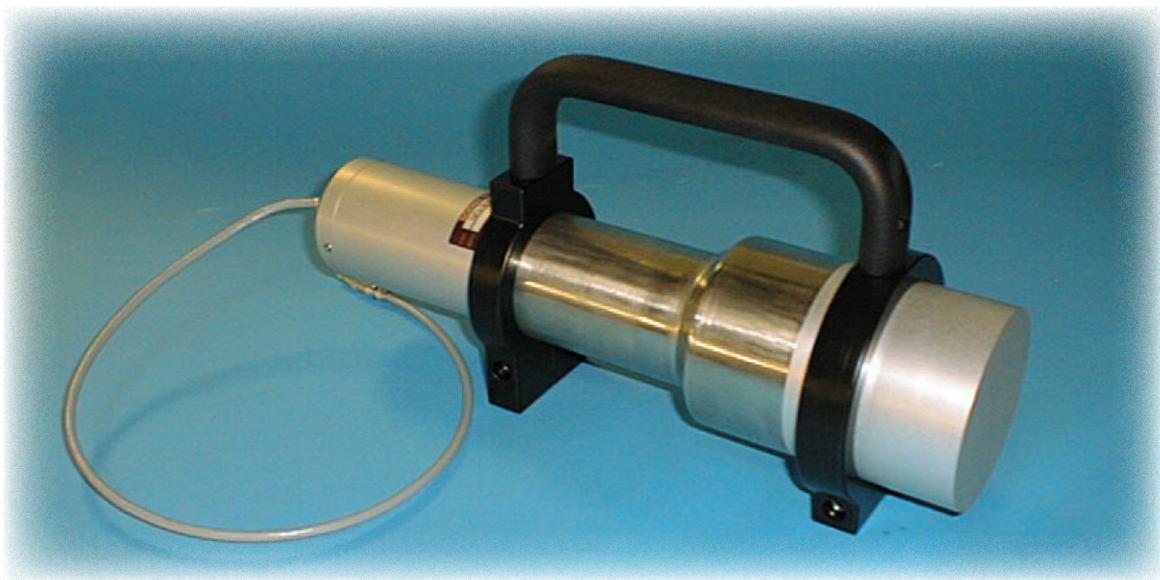

Scionix
1720 Natchez Trace Blvd.
Orlando, Florida 32818
U.S.A.
Tel: 407 578 6469
Fax: 407 578 6104
E-Mail: sales@scionixusa.com
Web Site: www.scionixusa.com

Scionix Holland B.V.
P.O. Box 143
3080 CC BUNNIK
The Netherlands
Tel: 31 30 657 0312
Fax: 31 30 656 7563
E-Mail: scionix@wxs.nl
Web Site: www.scionix.nl