




## Project

<i>First Saved</i>	<i>Tuesday, February 19, 2008</i>
<i>Last Saved</i>	<i>Tuesday, March 11, 2008</i>
<i>Product Version</i>	<i>11.0 Release</i>

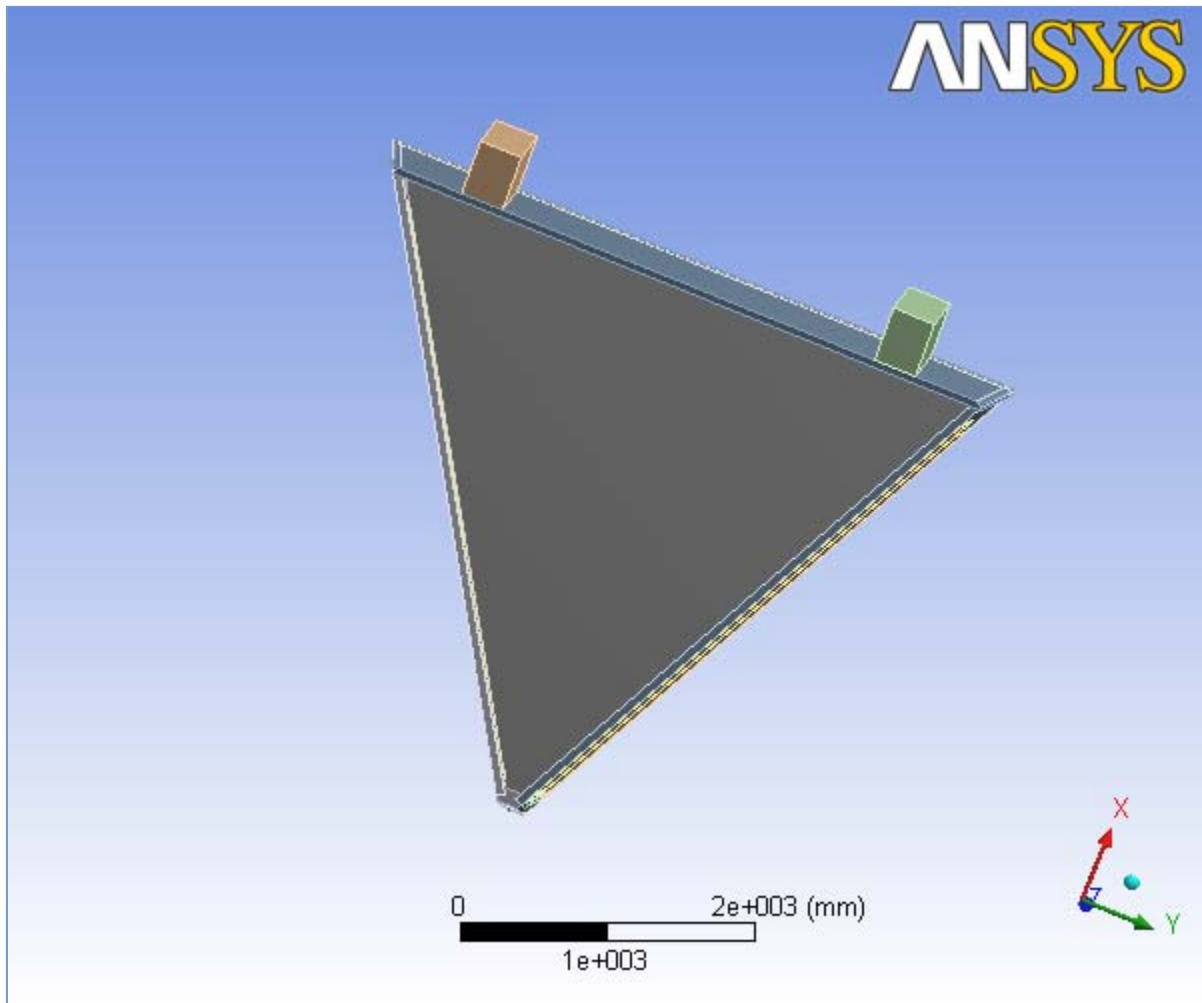

## Contents

- **Analysis 4.1**
  - [Geometry](#)
    - [Parts](#)
  - [Connections](#)
    - [Contact Regions](#)
  - [Mesh](#)
    - [Patch Independent](#)
  - [Named Selections](#)
  - **Static Structural**
    - [Analysis Settings](#)
    - [Acceleration](#)
    - [Loads](#)
    - [Solution](#)
      - [Solution Information](#)
      - [Results](#)
- **Material Data**
  - [Polyurethane](#)
  - [Carbon Fiber](#)
  - [Hexcel sheet](#)
  - [Structural Steel](#)

## Units

**TABLE 1**

Unit System	Metric (mm, kg, N, °C, s, mV, mA)
Angle	Degrees
Rotational Velocity	rad/s

## Analysis 4.1

### Geometry

**TABLE 2**  
**Analysis 4.1 > Geometry**

Object Name	<i>Geometry</i>
State	Fully Defined
<b>Definition</b>	
Source	C:\Documents and Settings\Jinnuri\Desktop\website\allaxis.agdb
Type	DesignModeler
Length Unit	Millimeters
Element Control	Program Controlled
Display Style	Part Color
<b>Bounding Box</b>	
Length X	4241.3 mm
Length Y	4560.2 mm
Length Z	2675. mm
<b>Properties</b>	

Volume	9.3232e+008 mm <sup>3</sup>
Mass	139.04 kg
<b>Statistics</b>	
Bodies	23
Active Bodies	16
Nodes	46742
Elements	156153
<b>Preferences</b>	
Import Solid Bodies	Yes
Import Surface Bodies	Yes
Import Line Bodies	Yes
Parameter Processing	Yes
Personal Parameter Key	DS
CAD Attribute Transfer	No
Named Selection Processing	No
Material Properties Transfer	No
CAD Associativity	Yes
Import Coordinate Systems	No
Reader Save Part File	No
Import Using Instances	Yes
Do Smart Update	No
Attach File Via Temp File	No
Analysis Type	3-D
Mixed Import Resolution	None
Enclosure and Symmetry Processing	Yes

**TABLE 3**  
**Analysis 4.1 > Geometry > Parts**

Object Name	<i>nose plate</i>	<i>end plate (1) 1of3</i>	<i>endplate(2)1 of 2</i>	<i>endplate(1) 2 of 3</i>	<i>endplate (1)3 of 3</i>
State	Meshed				
<b>Graphics Properties</b>					
Visible	Yes				
Transparency	1				
<b>Definition</b>					
Suppressed	No				
Material	Polyurethane				
Stiffness Behavior	Flexible				
Nonlinear Material Effects	Yes				
<b>Bounding Box</b>					
Length X	102.03 mm	221.42 mm		3819.7 mm	184.3 mm
Length Y	180.6 mm	160.89 mm		2238.4 mm	139.46 mm
Length Z	581.2 mm			2414.9 mm	233.38 mm
<b>Properties</b>					
Volume	7.6673e+006 mm <sup>3</sup>	2.4963e+006 mm <sup>3</sup>	3.7036e+006 mm <sup>3</sup>	3.6841e+007 mm <sup>3</sup>	1.2073e+006 mm <sup>3</sup>
Mass	1.8401 kg	0.59912 kg	0.88887 kg	8.8418 kg	0.28975 kg
Centroid X	46.019 mm	91.538 mm	108.97 mm	2247.1 mm	145.03 mm
Centroid Y	8.0978e-016 mm	92.546 mm	-102.61 mm	1337.1 mm	123.43 mm

Centroid Z	288.77 mm	346.17 mm	352.87 mm	-890.99 mm	366.72 mm
Moment of Inertia Ip1	54197 kg·mm <sup>2</sup>	13573 kg·mm <sup>2</sup>	14824 kg·mm <sup>2</sup>	3.3883e+005 kg·mm <sup>2</sup>	1152.9 kg·mm <sup>2</sup>
Moment of Inertia Ip2	52807 kg·mm <sup>2</sup>	14538 kg·mm <sup>2</sup>	16681 kg·mm <sup>2</sup>	2.0698e+007 kg·mm <sup>2</sup>	1315.2 kg·mm <sup>2</sup>
Moment of Inertia Ip3	4657.9 kg·mm <sup>2</sup>	1293. kg·mm <sup>2</sup>	2342.5 kg·mm <sup>2</sup>	2.0364e+007 kg·mm <sup>2</sup>	320.6 kg·mm <sup>2</sup>
<b>Statistics</b>					
Nodes	378	151	125	5821	93
Elements	1368	407	352	17624	253

**TABLE 4**  
**Analysis 4.1 > Geometry > Parts**

Object Name	<i>end plate 1 hole area non target end</i>	<i>end plate 1 hole area target end 1</i>	<i>end plate 1 hole area target end2</i>	<i>endplate(2) 2 of 2</i>	<i>end plate 2 hole area target end</i>
State	Meshed				
<b>Graphics Properties</b>					
Visible	Yes				
Transparency	1				
<b>Definition</b>					
Suppressed	No				
Material	Polyurethane				
Stiffness Behavior	Flexible				
Nonlinear Material Effects	Yes				
<b>Bounding Box</b>					
Length X	3363.1 mm	184.3 mm	3441.6 mm	3819.7 mm	3441.6 mm
Length Y	1974.7 mm	139.46 mm	2020. mm	2238.4 mm	2020. mm
Length Z	1945. mm	233.38 mm	1987.3 mm	2414.9 mm	1987.3 mm
<b>Properties</b>					
Volume	5.0102e+007 mm <sup>3</sup>	1.2073e+006 mm <sup>3</sup>	5.131e+007 mm <sup>3</sup>	3.4426e+007 mm <sup>3</sup>	5.131e+007 mm <sup>3</sup>
Mass	12.025 kg	0.28975 kg	12.314 kg	8.2623 kg	12.314 kg
Centroid X	1812.9 mm	137.19 mm	1844.3 mm	2274.8 mm	1765.8 mm
Centroid Y	1086.4 mm	118.9 mm	1104.5 mm	-1353. mm	-1059.2 mm
Centroid Z	-531.35 mm	110.68 mm	-808.51 mm	-914.74 mm	-766.25 mm
Moment of Inertia Ip1	47846 kg·mm <sup>2</sup>	1152.9 kg·mm <sup>2</sup>	48999 kg·mm <sup>2</sup>	3.3023e+005 kg·mm <sup>2</sup>	48999 kg·mm <sup>2</sup>
Moment of Inertia Ip2	1.7302e+007 kg·mm <sup>2</sup>	1315.2 kg·mm <sup>2</sup>	1.8581e+007 kg·mm <sup>2</sup>	1.8e+007 kg·mm <sup>2</sup>	1.8581e+007 kg·mm <sup>2</sup>
Moment of Inertia Ip3	1.7261e+007 kg·mm <sup>2</sup>	320.6 kg·mm <sup>2</sup>	1.8539e+007 kg·mm <sup>2</sup>	1.7674e+007 kg·mm <sup>2</sup>	1.8539e+007 kg·mm <sup>2</sup>
<b>Statistics</b>					
Nodes	871	275	902	5853	896
Elements	2337	36	2424	17702	2400

**TABLE 5**  
**Analysis 4.1 > Geometry > Parts**

Object Name	<i>endplate 2 hole area non target end</i>	<i>back plate</i>	<i>rod4</i>	<i>rod5</i>	<i>rod1</i>
State	Meshed			Suppressed	

Graphics Properties					
Visible	Yes			No	
Transparency	1				
Definition					
Suppressed	No			Yes	
Material	Polyurethane			Carbon Fiber	
Stiffness Behavior	Flexible				
Nonlinear Material Effects	Yes				
Bounding Box					
Length X	3520.1 mm	238.63 mm	50.8 mm		
Length Y	2065.4 mm	4557.2 mm	2558. mm	3167.6 mm	729.16 mm
Length Z	2029.5 mm	493.29 mm	50.8 mm		
Properties					
Volume	5.2517e+007 mm <sup>3</sup>	1.1556e+008 mm <sup>3</sup>	4.9963e+005 mm <sup>3</sup>	6.2009e+005 mm <sup>3</sup>	1.3828e+005 mm <sup>3</sup>
Mass	12.604 kg	27.734 kg	0.28979 kg	0.35965 kg	8.0201e-002 kg
Centroid X	1891.4 mm	3726.9 mm	2178.5 mm	2706.4 mm	595.07 mm
Centroid Y	-1131.7 mm	0.19075 mm	-6.2893e-010 mm	9.3264e-009 mm	1.3118e-010 mm
Centroid Z	-573.61 mm	-1695.4 mm	-1126.3 mm	-1411.4 mm	-271.02 mm
Moment of Inertia Ip1	50152 kg·mm <sup>2</sup>	4.6347e+007 kg·mm <sup>2</sup>	1.5274e+005 kg·mm <sup>2</sup>	2.919e+005 kg·mm <sup>2</sup>	3267.4 kg·mm <sup>2</sup>
Moment of Inertia Ip2	1.9922e+007 kg·mm <sup>2</sup>	6.1048e+005 kg·mm <sup>2</sup>	173.72 kg·mm <sup>2</sup>	215.61 kg·mm <sup>2</sup>	48.061 kg·mm <sup>2</sup>
Moment of Inertia Ip3	1.9879e+007 kg·mm <sup>2</sup>	4.5748e+007 kg·mm <sup>2</sup>	1.5274e+005 kg·mm <sup>2</sup>	2.919e+005 kg·mm <sup>2</sup>	3267.5 kg·mm <sup>2</sup>
Statistics					
Nodes	850	7520	0		
Elements	2222	30167	0		

**TABLE 6**  
**Analysis 4.1 > Geometry > Parts**

Object Name	<i>rod2</i>	<i>rod3</i>	<i>rod6</i>	<i>hexcel</i>	<i>mylar</i>
State	Suppressed			Meshed	Suppressed
Graphics Properties					
Visible	No			Yes	No
Transparency				1	
Definition					
Suppressed	Yes			No	Yes
Material	Carbon Fiber			Hexcel sheet	Structural Steel
Stiffness Behavior	Flexible				
Nonlinear Material Effects	Yes				
Bounding Box					
Length X	50.8 mm			3831.1 mm	3549.1 mm
Length Y	1338.8 mm	1948.4 mm	3777.2 mm	4559.1 mm	4202.6 mm
Length Z	50.8 mm			2084.1 mm	1916.6 mm
Properties					
Volume	2.5873e+005 mm <sup>3</sup>	3.7918e+005 mm <sup>3</sup>	7.4054e+005 mm <sup>3</sup>	4.0121e+008 mm <sup>3</sup>	2.2063e+005 mm <sup>3</sup>

Mass	0.15006 kg	0.21993 kg	0.42951 kg	11.568 kg	1.7319 kg
Centroid X	1122.8 mm	1650.6 mm	3234.3 mm	2514.6 mm	2415.9 mm
Centroid Y	-4.3959e-010 mm	-2.412e-009 mm	1.355e-008 mm	-0.90675 mm	8.2964e-009 mm
Centroid Z	-556.12 mm	-841.22 mm	-1696.5 mm	-776.52 mm	-1225.1 mm
Moment of Inertia Ip1	21253 kg·mm <sup>2</sup>	66800 kg·mm <sup>2</sup>	4.971e+005 kg·mm <sup>2</sup>	1.0036e+007 kg·mm <sup>2</sup>	1.2718e+006 kg·mm <sup>2</sup>
Moment of Inertia Ip2	89.952 kg·mm <sup>2</sup>	131.84 kg·mm <sup>2</sup>	257.48 kg·mm <sup>2</sup>	1.2923e+007 kg·mm <sup>2</sup>	1.6364e+006 kg·mm <sup>2</sup>
Moment of Inertia Ip3	21253 kg·mm <sup>2</sup>	66800 kg·mm <sup>2</sup>	4.971e+005 kg·mm <sup>2</sup>	2.2956e+007 kg·mm <sup>2</sup>	2.9081e+006 kg·mm <sup>2</sup>
<b>Statistics</b>					
Nodes	0			22570	0
Elements	0			77604	0

**TABLE 7**  
**Analysis 4.1 > Geometry > Parts**

Object Name	<i>top hinge area1</i>	<i>top hinge area2</i>	<i>ball joint</i>
State	Meshed		
<b>Graphics Properties</b>			
Visible	Yes		
Transparency	1		
<b>Definition</b>			
Suppressed	No		
Material	Polyurethane		
Stiffness Behavior	Flexible		
Nonlinear Material Effects	Yes		
<b>Bounding Box</b>			
Length X	562.43 mm		25. mm
Length Y	300. mm		39.658 mm
Length Z	624.05 mm		39.658 mm
<b>Properties</b>			
Volume	6.1378e+007 mm <sup>3</sup>		11971 mm <sup>3</sup>
Mass	14.731 kg		2.8731e-003 kg
Centroid X	3935.1 mm		-7.2354 mm
Centroid Y	1519.7 mm	-1517.9 mm	1.7419e-015 mm
Centroid Z	-1781.8 mm		290.6 mm
Moment of Inertia Ip1	4.3163e+005 kg·mm <sup>2</sup>		0.33261 kg·mm <sup>2</sup>
Moment of Inertia Ip2	5.1756e+005 kg·mm <sup>2</sup>		0.25283 kg·mm <sup>2</sup>
Moment of Inertia Ip3	3.0689e+005 kg·mm <sup>2</sup>		0.25283 kg·mm <sup>2</sup>
<b>Statistics</b>			
Nodes	163	162	112
Elements	626	619	12

## Connections

**TABLE 8**  
**Analysis 4.1 > Connections**

Object Name	<i>Connections</i>
State	Fully Defined
<b>Auto Detection</b>	

Generate Contact On Update	Yes
Tolerance Type	Slider
Tolerance Slider	0.
Tolerance Value	16.945 mm
Face/Face	Yes
Face/Edge	Yes
Edge/Edge	Yes
Priority	Include All
Same Body Grouping	Yes
Revolute Joints	Yes
Fixed Joints	Yes
<b>Transparency</b>	
Enabled	Yes

**TABLE 9**  
**Analysis 4.1 > Connections > Contact Regions**

Object Name	<i>Bonded - nose plate To ball joint</i>	<i>Bonded - nose plate (1) 1of3</i>	<i>Bonded - nose plate To endplate(2)1 of 2</i>	<i>Bonded - end plate (1) 1of3 To end plate 1 hole area target end 1</i>	<i>Bonded - end plate (1) 1of3 To endplate (1)3 of 3</i>
State	Fully Defined				
<b>Scope</b>					
Scoping Method	Geometry Selection				
Contact	1 Face				
Target	1 Face				
Contact Bodies	nose plate			end plate (1) 1of3	
Target Bodies	ball joint	end plate (1) 1of3	endplate(2)1 of 2	end plate 1 hole area target end 1	endplate (1)3 of 3
<b>Definition</b>					
Type	Bonded				
Scope Mode	Manual				
Behavior	Symmetric				
Suppressed	No				
<b>Advanced</b>					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				

**TABLE 10**  
**Analysis 4.1 > Connections > Contact Regions**

Object Name	<i>Bonded - end plate (1) 1of3 To endplate(1) 2 of 3</i>	<i>Bonded - end plate (1) 1of3 To endplate(1) 2 of 3</i>	<i>Bonded - end plate 1 hole area target end 1 To end plate 1 hole area target end2</i>	<i>Bonded - endplate (1)3 of 3 To end plate 1 hole area non target end</i>	<i>Bonded - endplate (1) 2 of 3 To end plate 1 hole area target end2</i>
State	Fully Defined				
<b>Scope</b>					
Scoping					

Method	Geometry Selection				
Contact	2 Faces	1 Edge	1 Face		
Target	2 Faces	1 Edge	1 Face		
Contact Bodies	end plate (1) 1of3		end plate 1 hole area target end 1	endplate (1)3 of 3	endplate(1) 2 of 3
Target Bodies	endplate(1) 2 of 3		end plate 1 hole area target end2	end plate 1 hole area non target end	end plate 1 hole area target end2
<b>Definition</b>					
Type	Bonded				
Scope Mode	Manual				
Behavior	Symmetric		Symmetric		
Suppressed	No				
<b>Advanced</b>					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				

**TABLE 11**  
**Analysis 4.1 > Connections > Contact Regions**

Object Name	<i>Bonded - endplate (1) 2 of 3 To end plate 1 hole area target end2</i>	<i>Bonded - endplate (1) 2 of 3 To end plate 1 hole area non target end</i>	<i>Bonded - endplate (1) 2 of 3 To end plate 1 hole area non target end</i>	<i>Bonded - endplate(1) 2 of 3 To back plate</i>	<i>Bonded - endplate(1) 2 of 3 To back plate</i>
State	Fully Defined				
<b>Scope</b>					
Scoping Method	Geometry Selection				
Contact	1 Face				1 Edge
Target	1 Face				1 Edge
Contact Bodies	endplate(1) 2 of 3				
Target Bodies	end plate 1 hole area target end2	end plate 1 hole area non target end		back plate	
<b>Definition</b>					
Type	Bonded				
Scope Mode	Manual				
Behavior	Symmetric				
Suppressed	No				
<b>Advanced</b>					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled			Radius	



Pinball Radius	40. mm
----------------	--------

**TABLE 12**  
**Analysis 4.1 > Connections > Contact Regions**

Object Name	<i>Bonded - endplate (1) 2 of 3 To rod4-rod5-rod1-rod2-rod3-rod6</i>	<i>Bonded - end plate 1 hole area target end2 To rod4-rod5-rod1-rod2-rod3-rod6</i>	<i>Bonded - endplate(2)1 of 2 To endplate (2) 2 of 2</i>	<i>Bonded - endplate(2)1 of 2 To endplate (2) 2 of 2</i>	<i>Bonded - endplate (2) 2 of 2 To endplate 2 hole area non target end</i>
State	Suppressed		Fully Defined		
<b>Scope</b>					
Scoping Method	Geometry Selection				
Contact	1 Face			1 Edge	1 Face
Target	No Selection		3 Faces	1 Edge	1 Face
Contact Bodies	endplate(1) 2 of 3	end plate 1 hole area target end2	endplate(2)1 of 2		endplate(2) 2 of 2
Target Bodies	rod4-rod5-rod1-rod2-rod3-rod6		endplate(2) 2 of 2		endplate 2 hole area non target end
<b>Definition</b>					
Type	Bonded				
Scope Mode	Manual				
Behavior	Symmetric				Symmetric
Suppressed	No				
<b>Advanced</b>					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled				

**TABLE 13**  
**Analysis 4.1 > Connections > Contact Regions**

Object Name	<i>Bonded - endplate (2) 2 of 2 To endplate 2 hole area non target end</i>	<i>Bonded - endplate (2) 2 of 2 To end plate 2 hole area target end</i>	<i>Bonded - endplate (2) 2 of 2 To end plate 2 hole area target end</i>	<i>Bonded - endplate(2) 2 of 2 To back plate</i>	<i>Bonded - endplate(2) 2 of 2 To back plate</i>
State	Fully Defined				
<b>Scope</b>					
Scoping Method	Geometry Selection				
Contact	1 Face				1 Edge
Target	1 Face				1 Edge
Contact Bodies	endplate(2) 2 of 2				
Target Bodies	endplate 2 hole area non target end	end plate 2 hole area target end		back plate	
<b>Definition</b>					
Type	Bonded				
Scope Mode	Manual				
Behavior	Symmetric				

Suppressed	No	
<b>Advanced</b>		
Formulation	Pure Penalty	
Normal Stiffness	Program Controlled	
Update Stiffness	Never	
Thermal Conductance	Program Controlled	
Pinball Region	Program Controlled	Radius
Pinball Radius		50. mm

**TABLE 14**  
**Analysis 4.1 > Connections > Contact Regions**

Object Name	<i>Bonded - endplate(2) 2 of 2 To rod4-rod5-rod1-rod2-rod3-rod6</i>	<i>Bonded - end plate 2 hole area target end To rod4-rod5-rod1-rod2-rod3-rod6</i>	<i>Bonded - hexcel To nose plate</i>	<i>Bonded - hexcel To back plate</i>	<i>Bonded - hexcel To endplate(2) 2 of 2</i>
State	Suppressed		Fully Defined		
<b>Scope</b>					
Scoping Method	Geometry Selection				
Contact	1 Face			1 Edge	
Target	No Selection		1 Face	1 Edge	
Contact Bodies	endplate(2) 2 of 2	end plate 2 hole area target end	hexcel		
Target Bodies	rod4-rod5-rod1-rod2-rod3-rod6		nose plate	back plate	endplate(2) 2 of 2
<b>Definition</b>					
Type	Bonded				
Scope Mode	Manual				
Behavior	Symmetric				
Suppressed	No				
<b>Advanced</b>					
Formulation	Pure Penalty				
Normal Stiffness	Program Controlled				
Update Stiffness	Never				
Thermal Conductance	Program Controlled				
Pinball Region	Program Controlled		Radius		
Pinball Radius			30. mm		

**TABLE 15**  
**Analysis 4.1 > Connections > Contact Regions**

Object Name	<i>Bonded - hexcel To endplate(1) 2 of 3</i>	<i>Bonded - hexcel To back plate</i>	<i>Bonded - back plate To top hinge area1</i>	<i>Bonded - back plate To top hinge area2</i>
State	Fully Defined			
<b>Scope</b>				
Scoping Method	Geometry Selection			
Contact	1 Edge		1 Face	
Target	1 Edge		1 Face	

Contact Bodies	hexcel		back plate	
Target Bodies	endplate(1) 2 of 3	back plate	top hinge area1	top hinge area2
<b>Definition</b>				
Type	Bonded			
Scope Mode	Manual			
Suppressed	No			
Behavior	Symmetric			
<b>Advanced</b>				
Formulation	Pure Penalty			
Normal Stiffness	Program Controlled			
Update Stiffness	Never			
Thermal Conductance	Program Controlled			
Pinball Region	Radius		Program Controlled	
Pinball Radius	30. mm			

## Mesh

**TABLE 16**  
**Analysis 4.1 > Mesh**

Object Name	<i>Mesh</i>
State	Solved
<b>Defaults</b>	
Physics Preference	Mechanical
Relevance	0
<b>Advanced</b>	
Relevance Center	Coarse
Element Size	Default
Shape Checking	Standard Mechanical
Solid Element Midside Nodes	Program Controlled
Straight Sided Elements	No
Initial Size Seed	Active Assembly
Smoothing	Low
Transition	Fast
<b>Statistics</b>	
Nodes	46742
Elements	156153

**TABLE 17**  
**Analysis 4.1 > Mesh > Mesh Controls**

Object Name	<i>Patch Independent</i>
State	Fully Defined
<b>Scope</b>	
Scoping Method	Geometry Selection
Geometry	14 Bodies
<b>Definition</b>	
Suppressed	No
Method	Tetrahedrons
Algorithm	Patch Independent
Element Midside Nodes	Dropped
Defined By	Max Element Size

Max Element Size	Default
Define Defeaturing Tolerance	Yes
Defeaturing Tolerance	1. mm
Curvature and Proximity Refinement	Yes
Min Size Limit	5. mm
Num Cells Across Gap	Default
Span Angle	Coarse
Minimum Edge Length	7.7856e-003 mm

## Named Selections

**TABLE 18**  
**Analysis 4.1 > Named Selections > Named Selections**

Object Name	<i>Problematic Geometry</i>	<i>Problematic Geometry 2</i>
State	Fully Defined	
<b>Scope</b>		
Geometry	1 Edge	
<b>Statistics</b>		
Type	Manual	
Total Selection	1 Edge	
Suppressed	0	
Hidden	0	

## Static Structural

**TABLE 19**  
**Analysis 4.1 > Analysis**


Object Name	<i>Static Structural</i>
State	Fully Defined
<b>Definition</b>	
Physics Type	Structural
Analysis Type	Static Structural
<b>Options</b>	
Reference Temp	22. °C

**TABLE 20**  
**Analysis 4.1 > Static Structural > Analysis Settings**

Object Name	<i>Analysis Settings</i>
State	Fully Defined
<b>Step Controls</b>	
Number Of Steps	1.
Current Step Number	1.
Step End Time	1. s
Auto Time Stepping	Program Controlled
<b>Solver Controls</b>	
Solver Type	Program Controlled
Weak Springs	Program Controlled
Large Deflection	Off
Inertia Relief	Off
<b>Nonlinear Controls</b>	

Force Convergence	Program Controlled
Moment Convergence	Program Controlled
Displacement Convergence	Program Controlled
Rotation Convergence	Program Controlled
Line Search	Program Controlled
<b>Output Controls</b>	
Calculate Stress	Yes
Calculate Strain	Yes
Calculate Results At	All Time Points
<b>Analysis Data Management</b>	
Solver Files Directory	C:\Documents and Settings\Jinnuri\Desktop\website\allaxis Simulation Files\Static Structural\
Future Analysis	None
Save ANSYS db	No
Delete Unneeded Files	Yes
Nonlinear Solution	No


**FIGURE 1**  
Analysis 4.1 > Static Structural > Figure

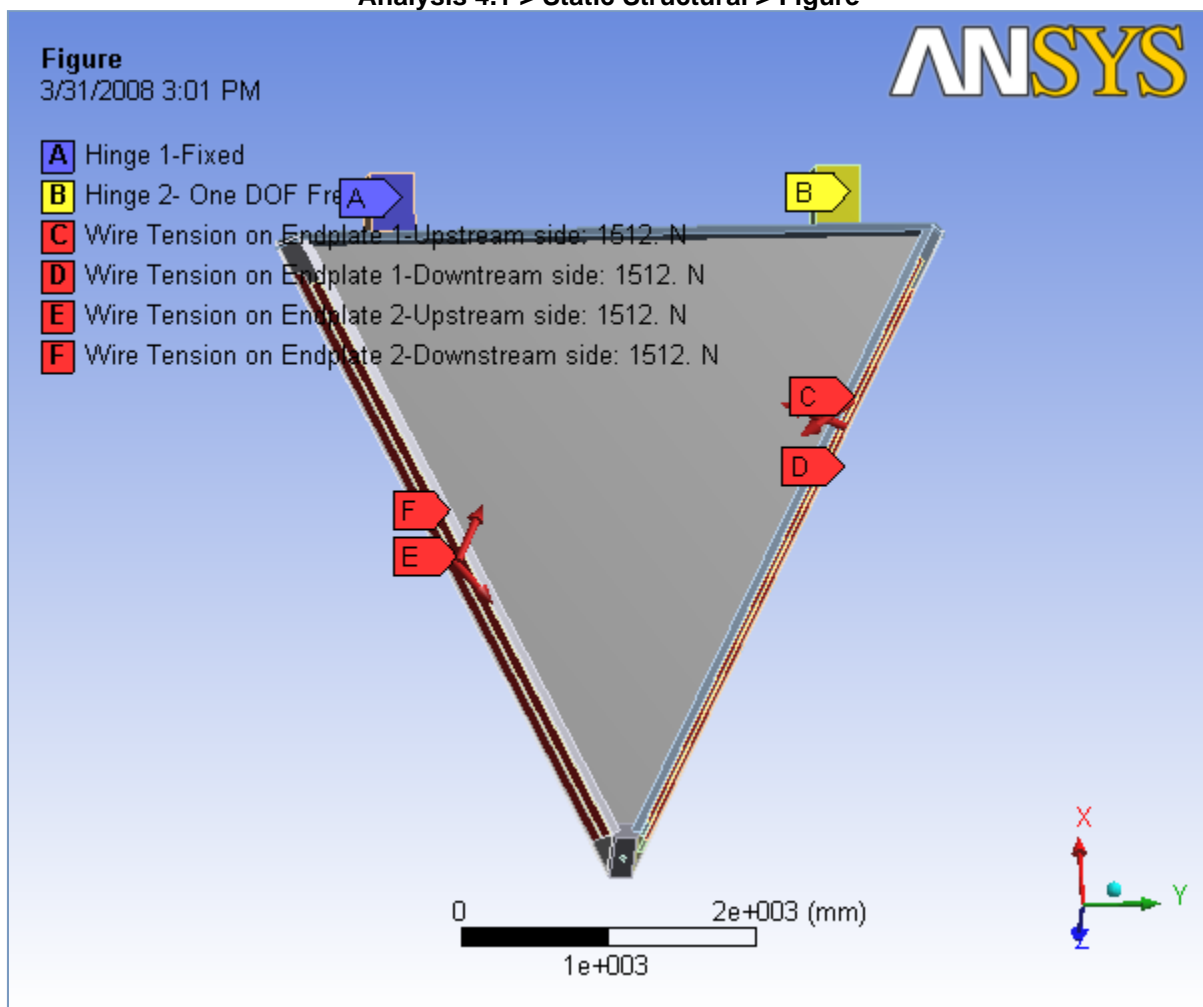

**TABLE 21**  
Analysis 4.1 > Static Structural > Accelerations

Object Name	<i>Acceleration</i>
State	Suppressed
<b>Scope</b>	
Geometry	All Bodies
<b>Definition</b>	
Define By	Components
X Component	9810. mm/s <sup>2</sup> (ramped)
Y Component	0. mm/s <sup>2</sup> (ramped)
Z Component	0. mm/s <sup>2</sup> (ramped)
Suppressed	Yes

**FIGURE 2**  
**Analysis 4.1 > Static Structural > Acceleration**

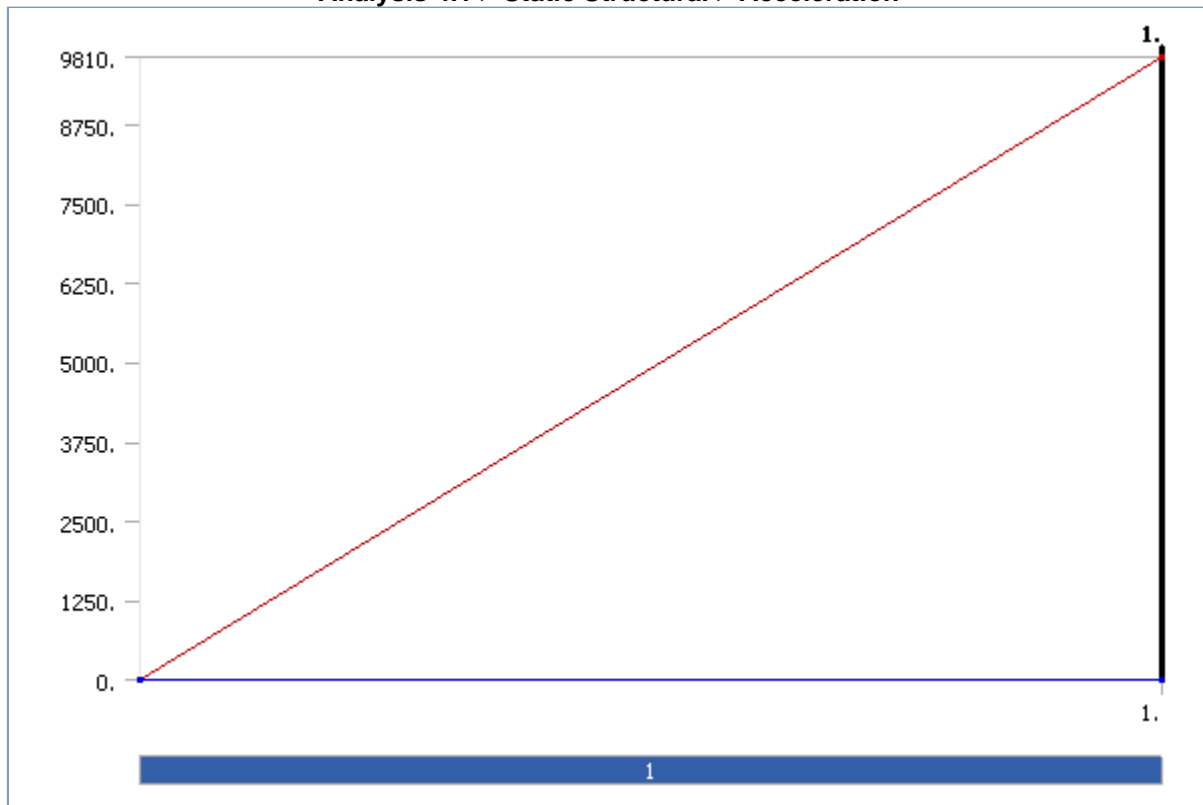


**TABLE 22**  
**Analysis 4.1 > Static Structural > Loads**


Object Name	<i>Hinge 1- Fixed</i>	<i>Hinge 2- One DOF Free</i>	<i>Wire Tension on Endplate 1- Upstream side</i>	<i>Wire Tension on Endplate 1- Downstream side</i>	<i>Wire Tension on Endplate 2- Upstream side</i>
State	Fully Defined				
<b>Scope</b>					
Scoping Method	Geometry Selection				
Geometry	1 Face				
<b>Definition</b>					
Type	Fixed Support	Displacement	Force		
Suppressed	No				
Define By	Components				

X Component	0. mm (ramped)	-888.73 N (ramped)	614.98 N (ramped)	1381.3 N (ramped)
Y Component	Free	-1223.2 N (ramped)	-1381.3 N (ramped)	614.98 N (ramped)
Z Component	0. mm (ramped)	0. N (ramped)		


**FIGURE 3**  
**Analysis 4.1 > Static Structural > Hinge 2- One DOF Free**

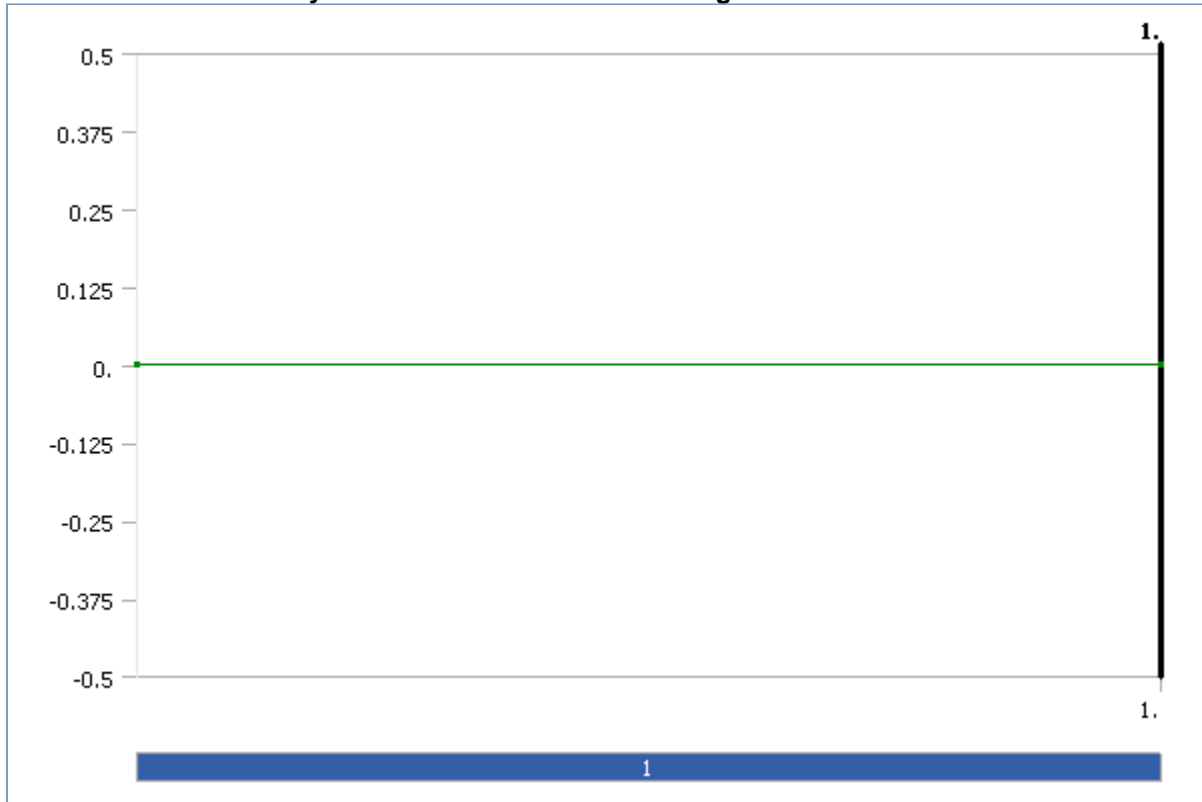

**FIGURE 4**  
**Analysis 4.1 > Static Structural > Wire Tension on Endplate 1-Upstream side**

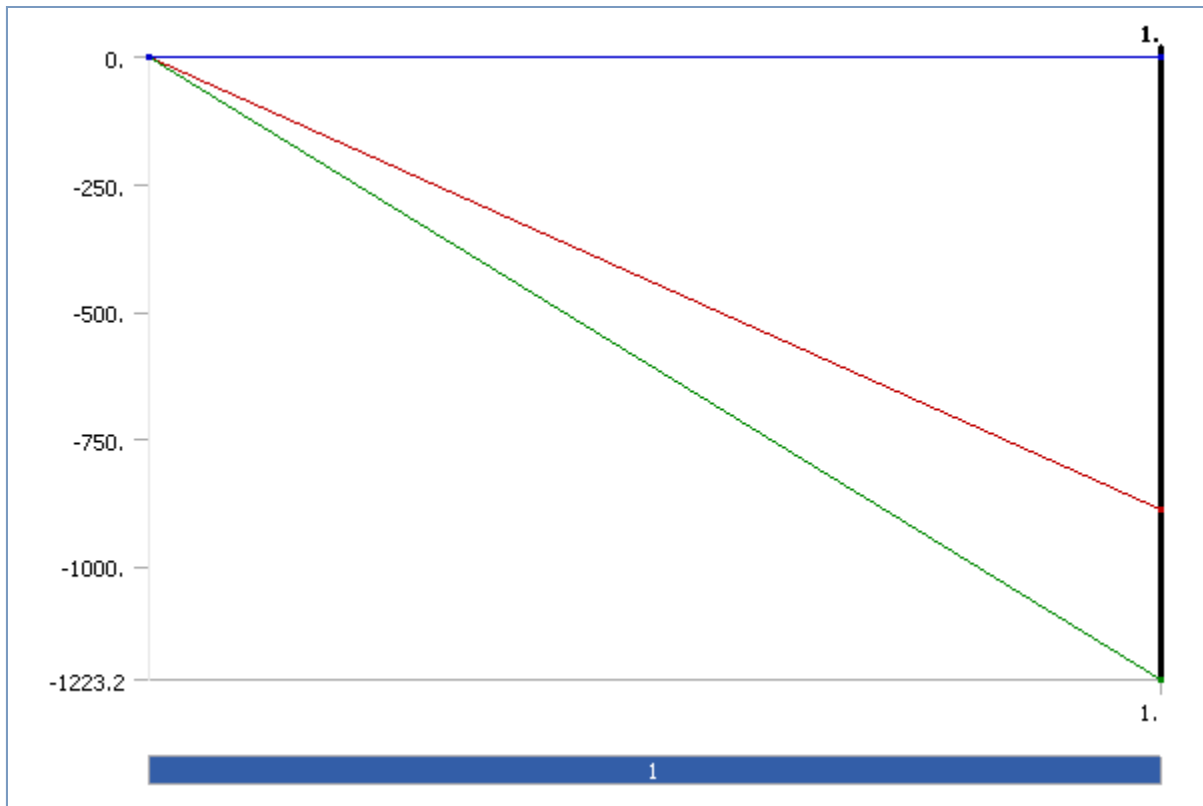


**FIGURE 5**  
**Analysis 4.1 > Static Structural > Wire Tension on Endplate 1-Downstream side**

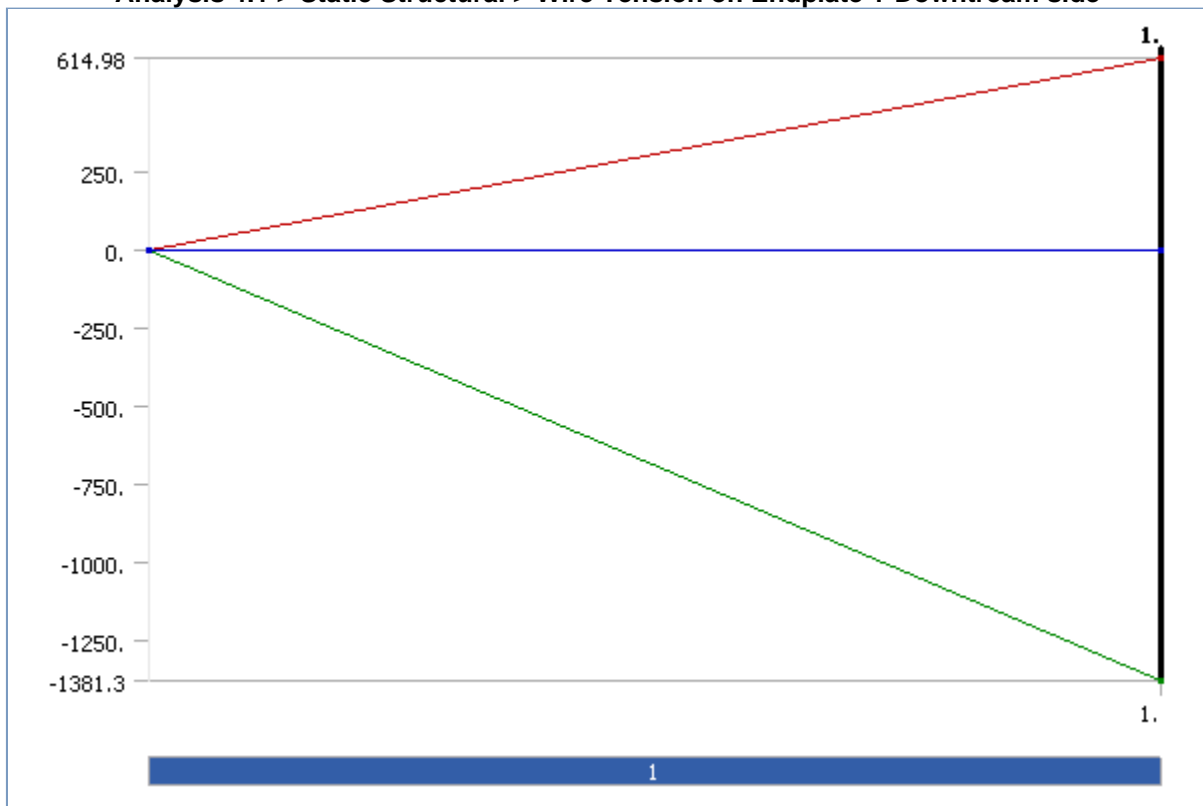

**FIGURE 6**  
**Analysis 4.1 > Static Structural > Wire Tension on Endplate 2-Upstream side**




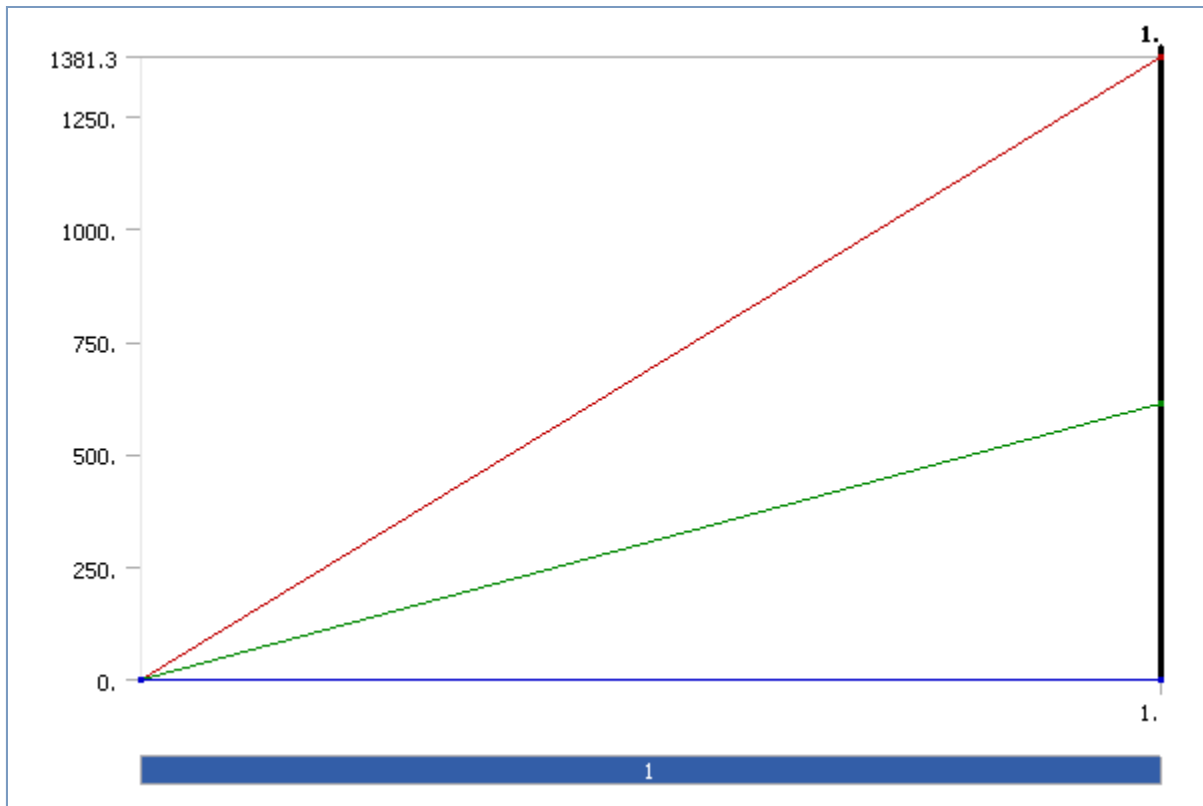

**TABLE 23**  
**Analysis 4.1 > Static Structural > Loads**

Object Name	<i>Wire Tension on Endplate 2-Downstream side</i>	<i>Ball Joint</i>
State	Fully Defined	Suppressed
<b>Scope</b>		
Scoping Method	Geometry Selection	
Geometry	1 Face	
<b>Definition</b>		
Define By	Components	
Type	Force	Fixed Support
X Component	-1223.2 N (ramped)	
Y Component	888.73 N (ramped)	
Z Component	0. N (ramped)	
Suppressed	No	Yes

**FIGURE 7**  
**Analysis 4.1 > Static Structural > Wire Tension on Endplate 2-Downstream side**

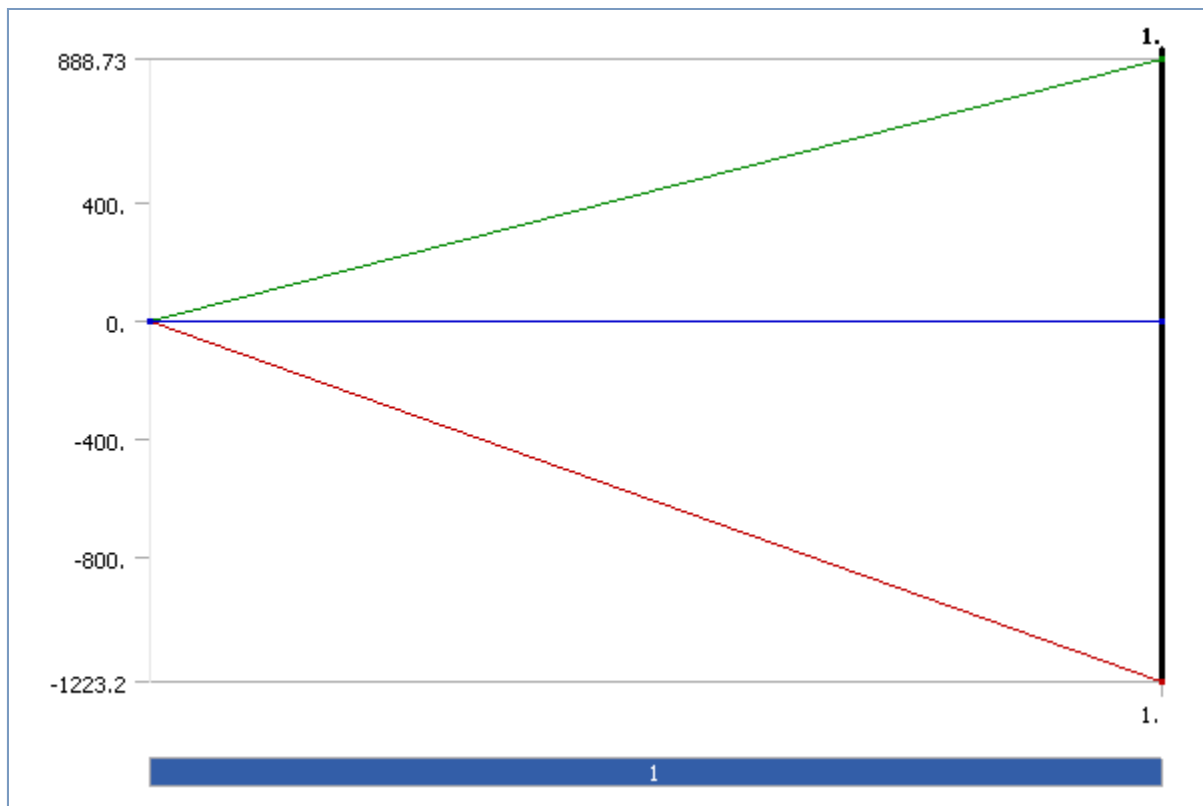

## Solution

**TABLE 24**  
Analysis 4.1 > Static Structural > Solution

Object Name	<i>Solution</i>
State	Solved
<b>Adaptive Mesh Refinement</b>	
Max Refinement Loops	1.
Refinement Depth	2.

**TABLE 25**  
Analysis 4.1 > Static Structural > Solution > Solution Information


Object Name	<i>Solution Information</i>
State	Solved
<b>Solution Information</b>	
Solution Output	Solver Output
Newton-Raphson Residuals	0
Update Interval	2.5 s
Display Points	All

**TABLE 26**  
Analysis 4.1 > Static Structural > Solution > Results


Object Name	<i>Total Deformation</i>	<i>x Directional Deformation</i>	<i>y Directional Deformation</i>	<i>z Directional Deformation</i>
State	Solved			
<b>Scope</b>				
Geometry	All Bodies			
<b>Definition</b>				

Type	Total Deformation	Directional Deformation		
Display Time	0.40293 s	End Time		
Orientation		X Axis	Y Axis	Z Axis
Results				
Minimum	0. mm	-4.6469e-002 mm	-0.25782 mm	-8.5052e-002 mm
Maximum	0.29043 mm	0.14605 mm	0.24794 mm	4.4955e-003 mm
Minimum Occurs On	top hinge area2	nose plate	endplate(1) 2 of 3	nose plate
Maximum Occurs On	endplate(1) 2 of 3	endplate(2) 2 of 2		back plate
Information				
Time	1. s			
Load Step	1			
Substep	1			
Iteration Number	1			


**FIGURE 8**  
Analysis 4.1 > Static Structural > Solution > Total Deformation > Figure

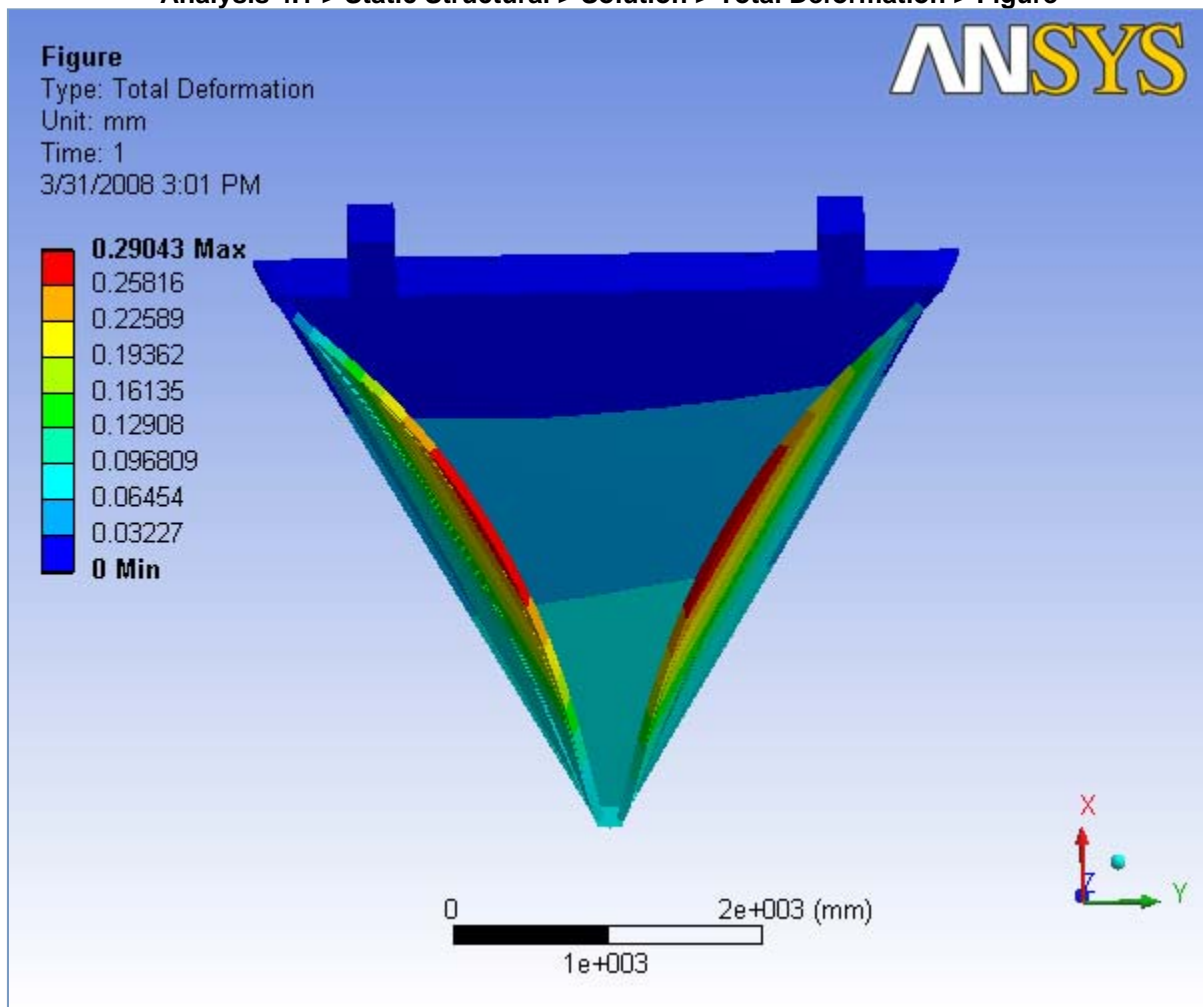


**FIGURE 9**  
Analysis 4.1 > Static Structural > Solution > x Directional Deformation > Figure

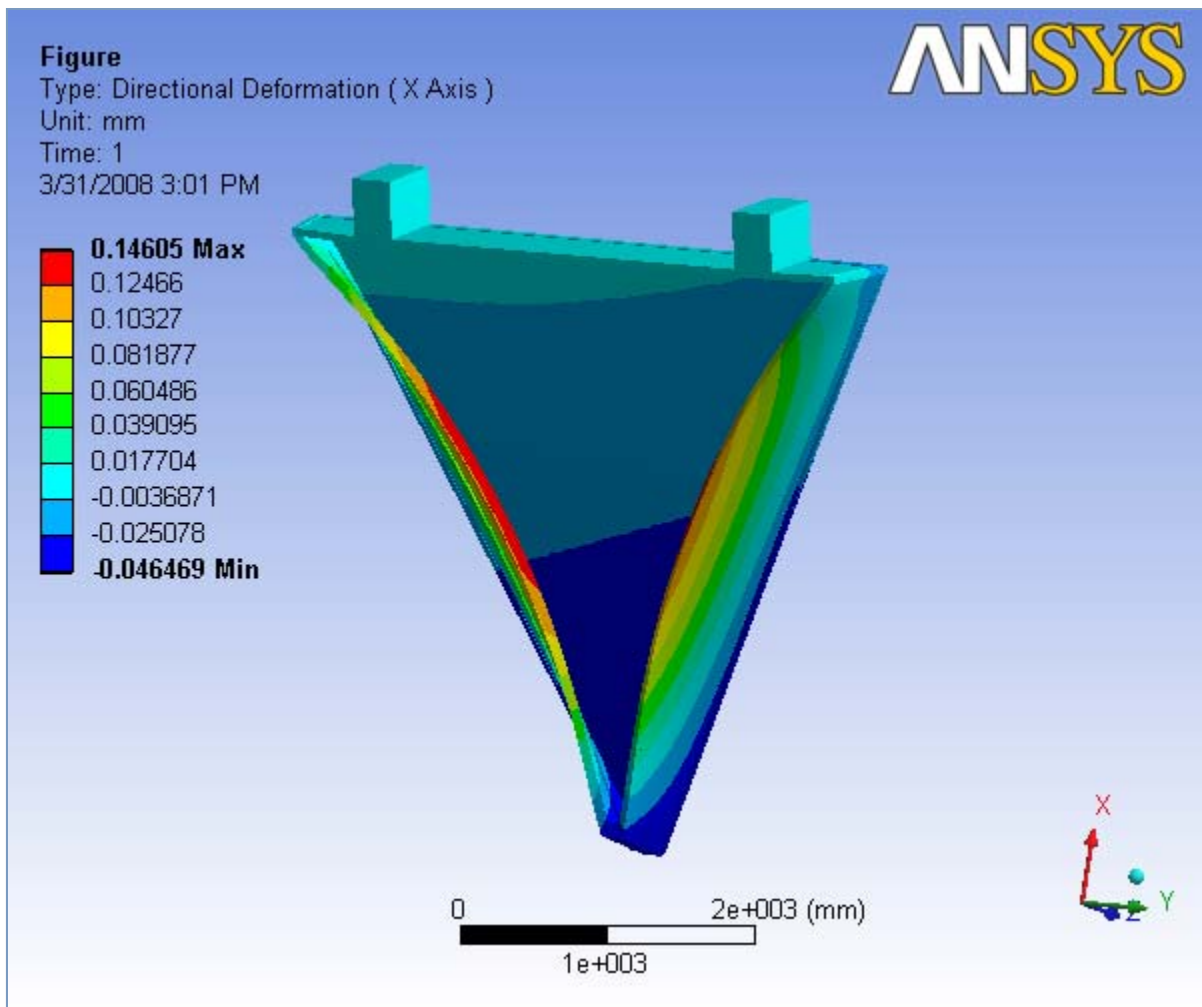

**FIGURE 10**  
**Analysis 4.1 > Static Structural > Solution > y Directional Deformation > Figure**

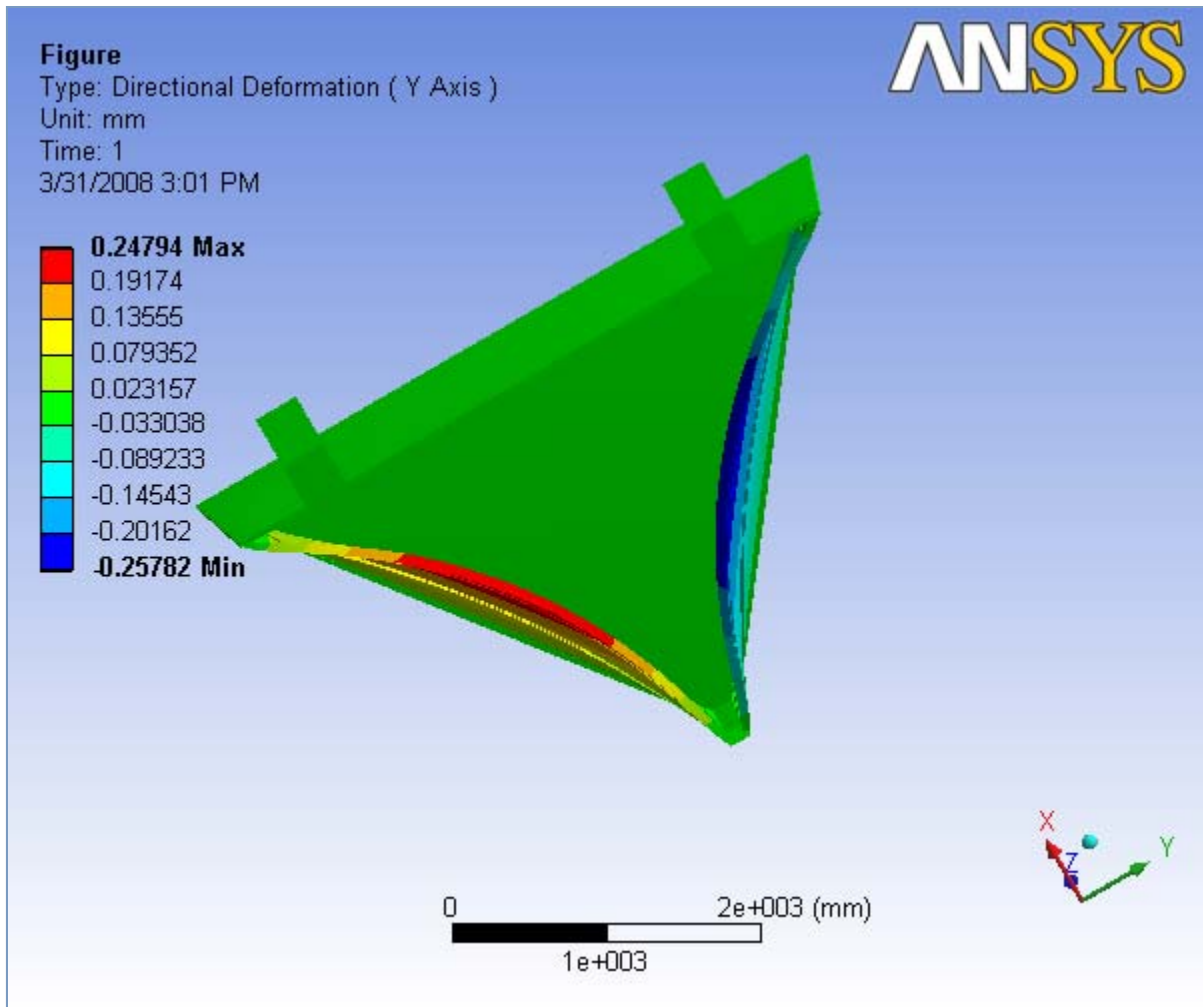

**FIGURE 11**  
**Analysis 4.1 > Static Structural > Solution > z Directional Deformation > Figure**

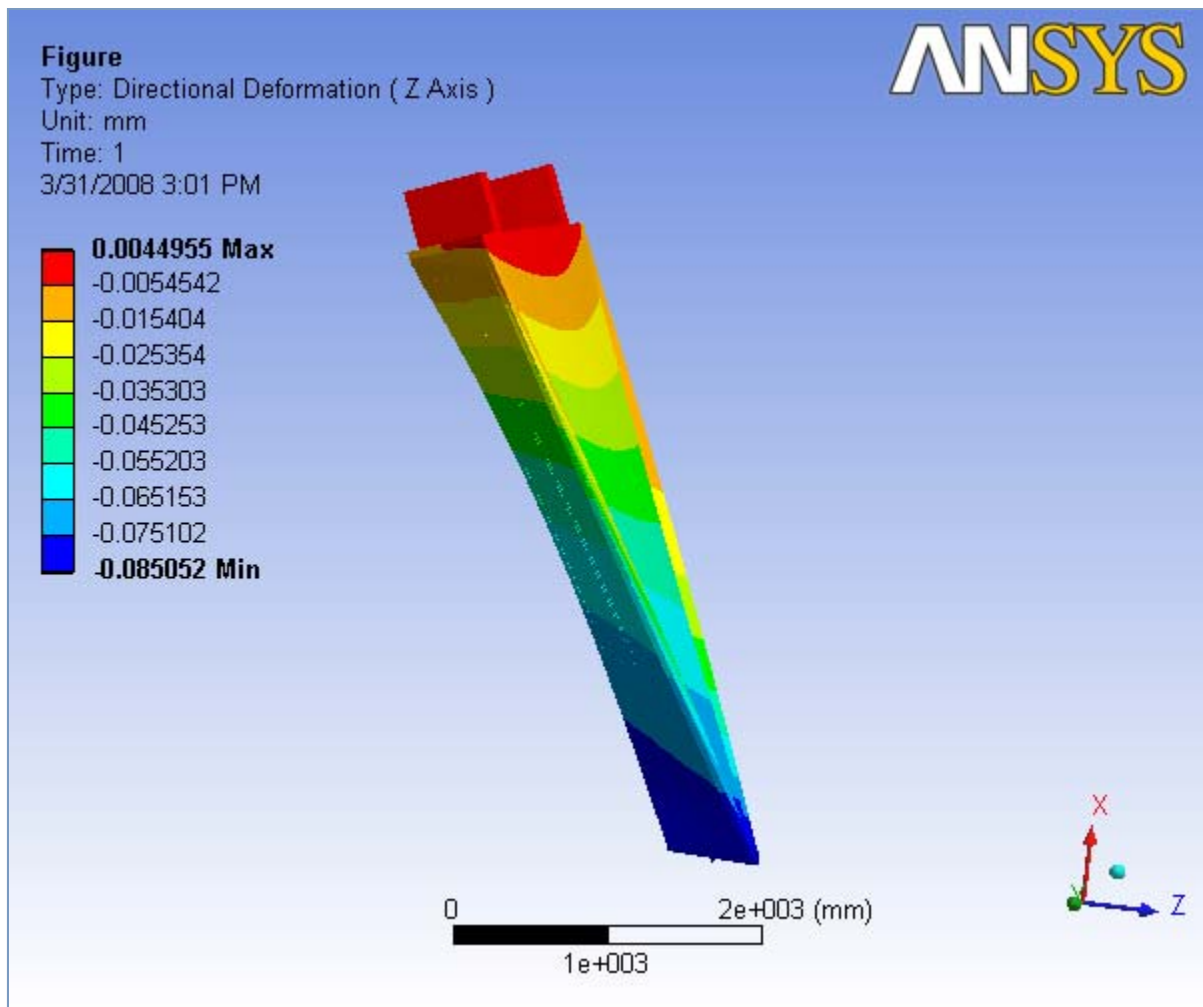

## Material Data

### *Polyurethane*

**TABLE 27**  
**Polyurethane > Constants**

<b>Structural</b>	
Young's Modulus	9751.9 MPa
Poisson's Ratio	0.
Density	2.4e-007 kg/mm <sup>3</sup>
Thermal Expansion	0. 1/°C
<b>Thermal</b>	
Thermal Conductivity	0. W/mm·°C
Specific Heat	0. J/kg·°C
<b>Electromagnetics</b>	
Relative Permeability	0.
Resistivity	0. Ohm-mm

### *Carbon Fiber*

**TABLE 28**

**Carbon Fiber > Constants**

<b>Structural</b>	
Young's Modulus	1.5e+005 MPa
Poisson's Ratio	0.
Density	5.8e-007 kg/mm <sup>3</sup>
Thermal Expansion	0. 1/°C
<b>Thermal</b>	
Thermal Conductivity	0. W/mm·°C
Specific Heat	0. J/kg·°C
<b>Electromagnetics</b>	
Relative Permeability	0.
Resistivity	0. Ohm·mm

**Hexcel sheet**

**TABLE 29**  
**Hexcel sheet > Constants**


<b>Structural</b>	
Young's Modulus	1.4805e+005 MPa
Poisson's Ratio	0.
Density	2.8833e-008 kg/mm <sup>3</sup>
Thermal Expansion	0. 1/°C
<b>Thermal</b>	
Thermal Conductivity	0. W/mm·°C
Specific Heat	0. J/kg·°C
<b>Electromagnetics</b>	
Relative Permeability	0.
Resistivity	0. Ohm·mm

**Structural Steel**

**TABLE 30**  
**Structural Steel > Constants**

<b>Structural</b>	
Young's Modulus	2.e+005 MPa
Poisson's Ratio	0.3
Density	7.85e-006 kg/mm <sup>3</sup>
Thermal Expansion	1.2e-005 1/°C
Tensile Yield Strength	250. MPa
Compressive Yield Strength	250. MPa
Tensile Ultimate Strength	460. MPa
Compressive Ultimate Strength	0. MPa
<b>Thermal</b>	
Thermal Conductivity	6.05e-002 W/mm·°C
Specific Heat	434. J/kg·°C
<b>Electromagnetics</b>	
Relative Permeability	10000
Resistivity	1.7e-004 Ohm·mm

**FIGURE 12**  
**Structural Steel > Alternating Stress**

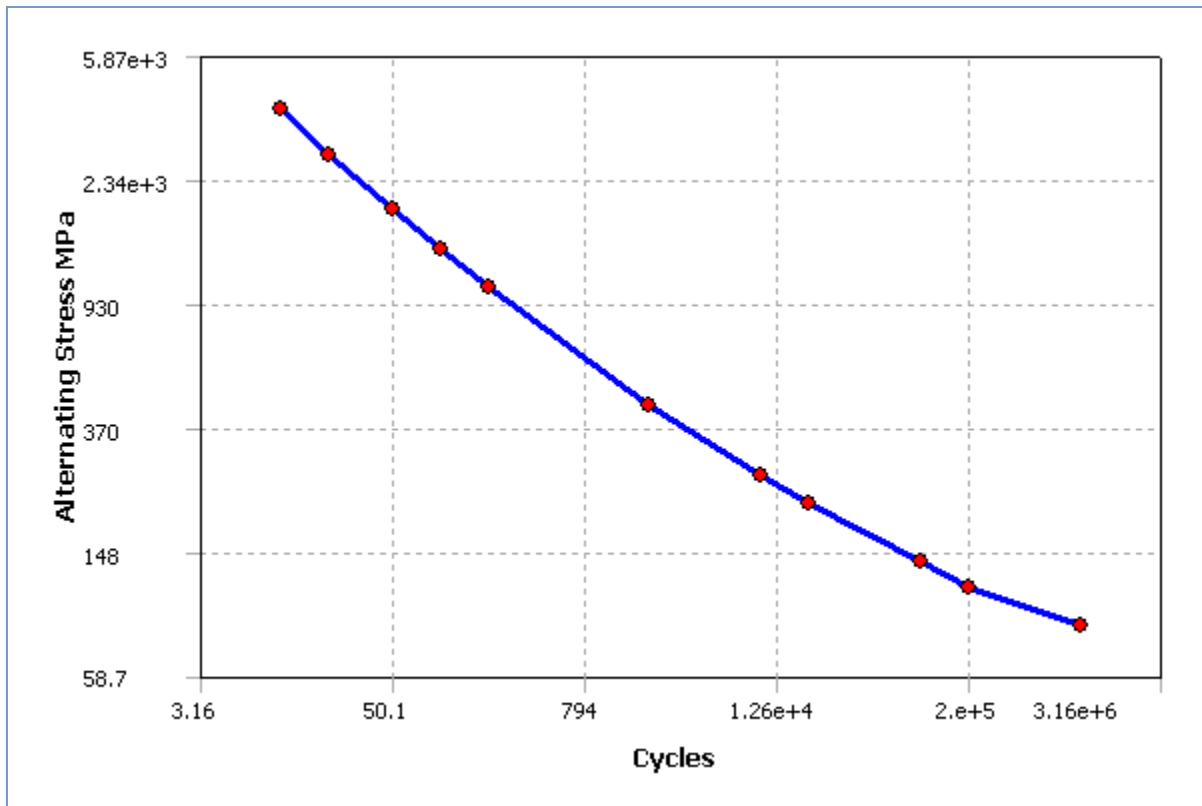

**TABLE 31**  
Structural Steel > Alternating Stress > Property Attributes

Interpolation	Log-Log
Mean Curve Type	Mean Stress

**TABLE 32**  
Structural Steel > Alternating Stress > Alternating Stress Curve Data


Mean Value MPa
0.

**TABLE 33**  
Structural Steel > Alternating Stress > Alternating Stress vs. Cycles

Cycles	Alternating Stress MPa
10.	3999.
20.	2827.
50.	1896.
100.	1413.
200.	1069.
2000.	441.
10000	262.
20000	214.
1.e+005	138.
2.e+005	114.
1.e+006	86.2

**FIGURE 13**  
Structural Steel > Strain-Life Parameters



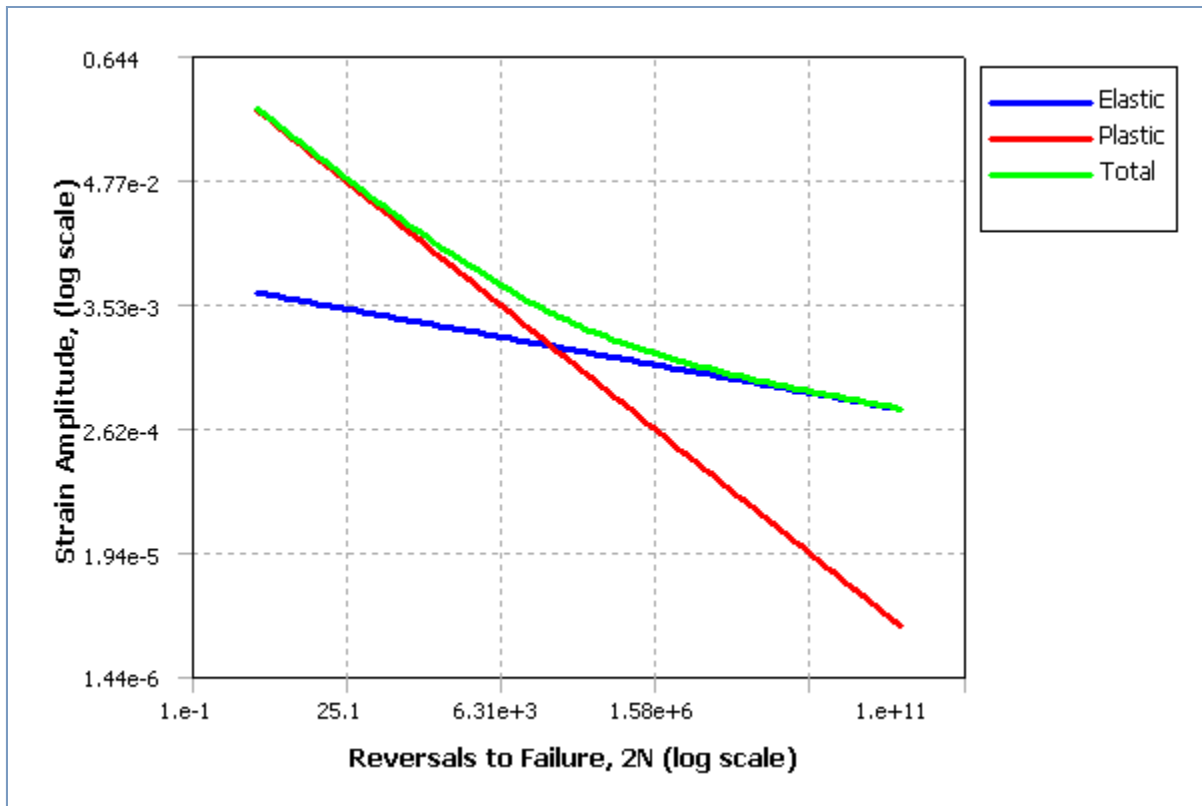

**TABLE 34**  
**Structural Steel > Strain-Life Parameters > Property Attributes**  
 Display Curve Type Strain-Life

**TABLE 35**  
**Structural Steel > Strain-Life Parameters > Strain-Life Parameters**

Strength Coefficient MPa	920.
Strength Exponent	-0.106
Ductility Coefficient	0.213
Ductility Exponent	-0.47
Cyclic Strength Coefficient MPa	1000.
Cyclic Strain Hardening Exponent	0.2