

# PROPOSAL FOR POSITRON PRODUCTION EFFICIENCY STUDY USING HIGH REPETITION RATE LINAC AT IAC

Sadiq Setiniyaz (Shadike Saitiniyazi)\*

August 21, 2012

## Abstract

I propose to measure the positron production efficiency for a positron source that uses a quadrupole triplet system to collect positrons from a tungsten target that are produced when the target is impinged by electrons from the High Repetition Rate Linac (HRRL) at Idaho State University's (ISU) Idaho Accelerator Center (IAC). Positrons were observed in May of 2008 at the IAC without the use of a quadrupole triplet collection system. When a 10 MeV electron beam is used on the tungsten target, positrons escaping from the downstream side of the tungsten have a wide momentum spread of 0 to 2 MeV and a large divergence of  $\pi$  rad. A quad triplet collection system, after the tungsten target, is used to focus the positron beam and as a result increase our positron collection efficiency. I will install the collection system and associated beam line components and measure the positron production efficiency using the HRRL.

## 1 Introduction

I propose to measure the positron production efficiency for a positron source that uses a quadrupole triplet system to collect positrons from a tungsten target that are produced when the target is impinged by electrons from the HRRL. A polarized positron source, as a new probe to explore nuclear and particle physics at Jefferson Lab, is being studied at the Continuous Electron Beam Accelerator Facility (CEBAF). While their main mission is to optimize polarization, ISU's goal is to optimize positron production efficiency. Additionally, a positron beamline at ISU is also a potential tool for nuclear physics studies. I have measured the emittance of the HRRL electron beam and constructed PMT bases for four NaI detectors. I will install the collection system and associated beam line components to measure the positron production efficiency using the HRRL.

\*Email: sadik82@gmail.com

## 2 Previous Measurements

Earlier positron production measurements were conducted at ISU's IAC in the May of 2008. The setup is shown in Fig. 1 and the beamline elements are described in Table 1. The accelerator was operated at a 300 Hz repetition rate and 10 MeV energy. Electrons were bent by the first dipole and sent to a 2 mm thick tungsten target. Any positrons produced were focused using two quadrupoles and bent 45 degrees by a second dipole which was set to transport 3 MeV positrons. Positrons were transported to the end of the linac where they annihilated in a Ta target. A HpGe and a NaI detector were used to detect the 511 keV positrons produced as a result of annihilation. Fig. 2 shows the spectrum taken over a 600 second time interval.

Table 1: Beamline elements for positron production at IAC in 2008.

Item	Description
Tantalum foil	6 mm thick 20 mm x 20 mm area
Tungsten foil	2 mm thick 20 mm x 20 mm area
Phosphorus flag	1 mil aluminum backing
HpGe detector	81.3mm Diameter, 55.5mm Length

## 3 Proposed Beamline

I propose a measurement of the positron production efficiency using the HRRL. The HRRL can provide electron beams with energies between 3 MeV and 16 MeV, and a maximum repetition rate of 300 Hz. The HRRL beamline has recently been reconfigured to generate and collect positrons, see Fig. 3 and Table 2.

The new beamline was first designed by Dr. G. Stancari to use a quadrupole triplet system to collect positrons [1]. The design was further optimized by Dr. Y Kim. The final design of the beamline is shown in Fig. 3. The HRRL accelerator room is divided into two parts by an L-shaped cement wall. The accelerator cell houses the cavity and other elements needed to transport electrons to

Table 2: Operational Parameters of The HRRL Linac.

Parameter	Unit	Value
maximum electron beam energy $E$	MeV	16
electron beam peak current $I_{\text{peak}}$	mA	80
macro-pulse repetition rate	Hz	300
macro-pulse pulse length (FWHM)	ns	250
rms energy spread	%	4.23

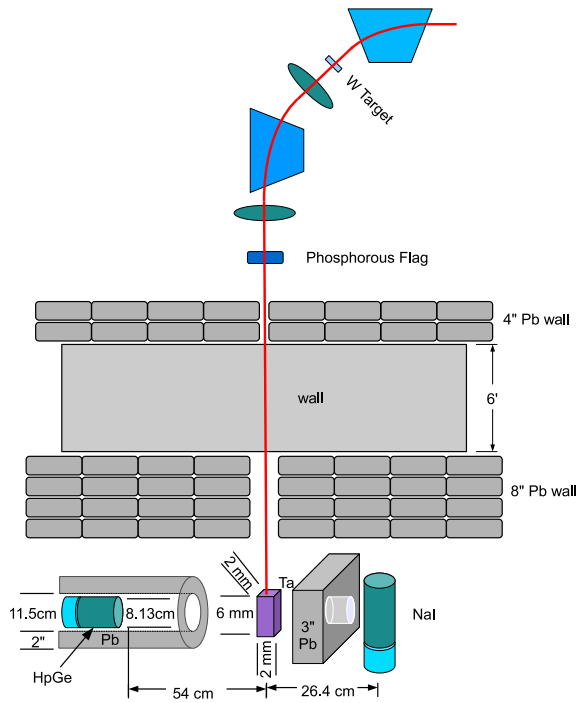


Figure 1: The HRRL beamline configured for positron production at IAC in 2008.

an experimental cell. The experimental cell is located in a room adjacent to the accelerator cell. The HRRL beamline was reconfigured into an achromat by moving the accelerator cavity to accommodate two dipoles and a system of quadrupole magnets optimized for collecting positrons.

In the new beamline, shown in Fig. 3, the electron beam exits the cavity and passes through a quadrupole triplet that will focus the electron beam onto the positron target. Positrons produced from the positron target will be collected by the second quadrupole triplet that will be optimized to collect positrons. The first dipole magnet bends the positrons/electrons, depending on the magnet polarity, by 45 degrees towards the second dipole magnet. The second dipole will bend the beam another 45 degrees, thus completing a 90 degree bend. A third quadrupole triplet will focus the  $e^-/e^+$  beam, as users desire. All beam elements are described in Table 3.

Table 3: The new HRRL positron beamline elements.

Item	Description
T1	Positron target
T2	Annihilation target
EnS	Energy Slit
FC1, FC2	Faraday Cups
Q1,...Q10	Quadrupoles
D1, D2	Dipoles
NaI	NaI Detectors
OTR	Optical Transition Radiation screen
YAG	Yttrium Aluminium Garnet screen

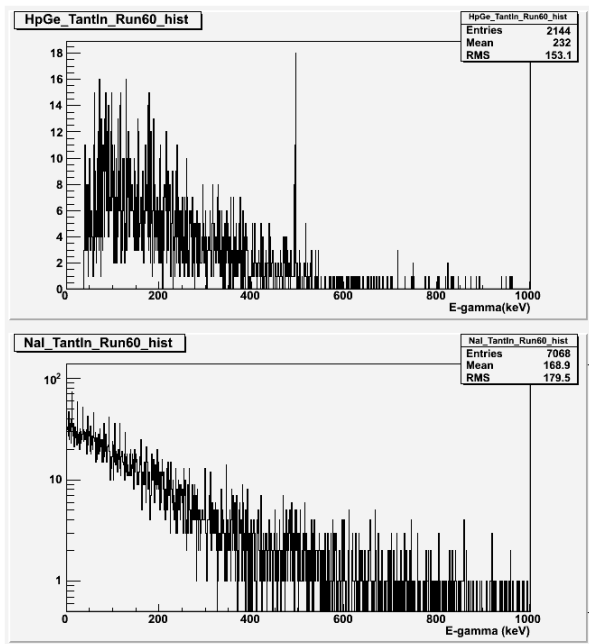


Figure 2: Spectrum from HpGe Detector and NaI detectors.

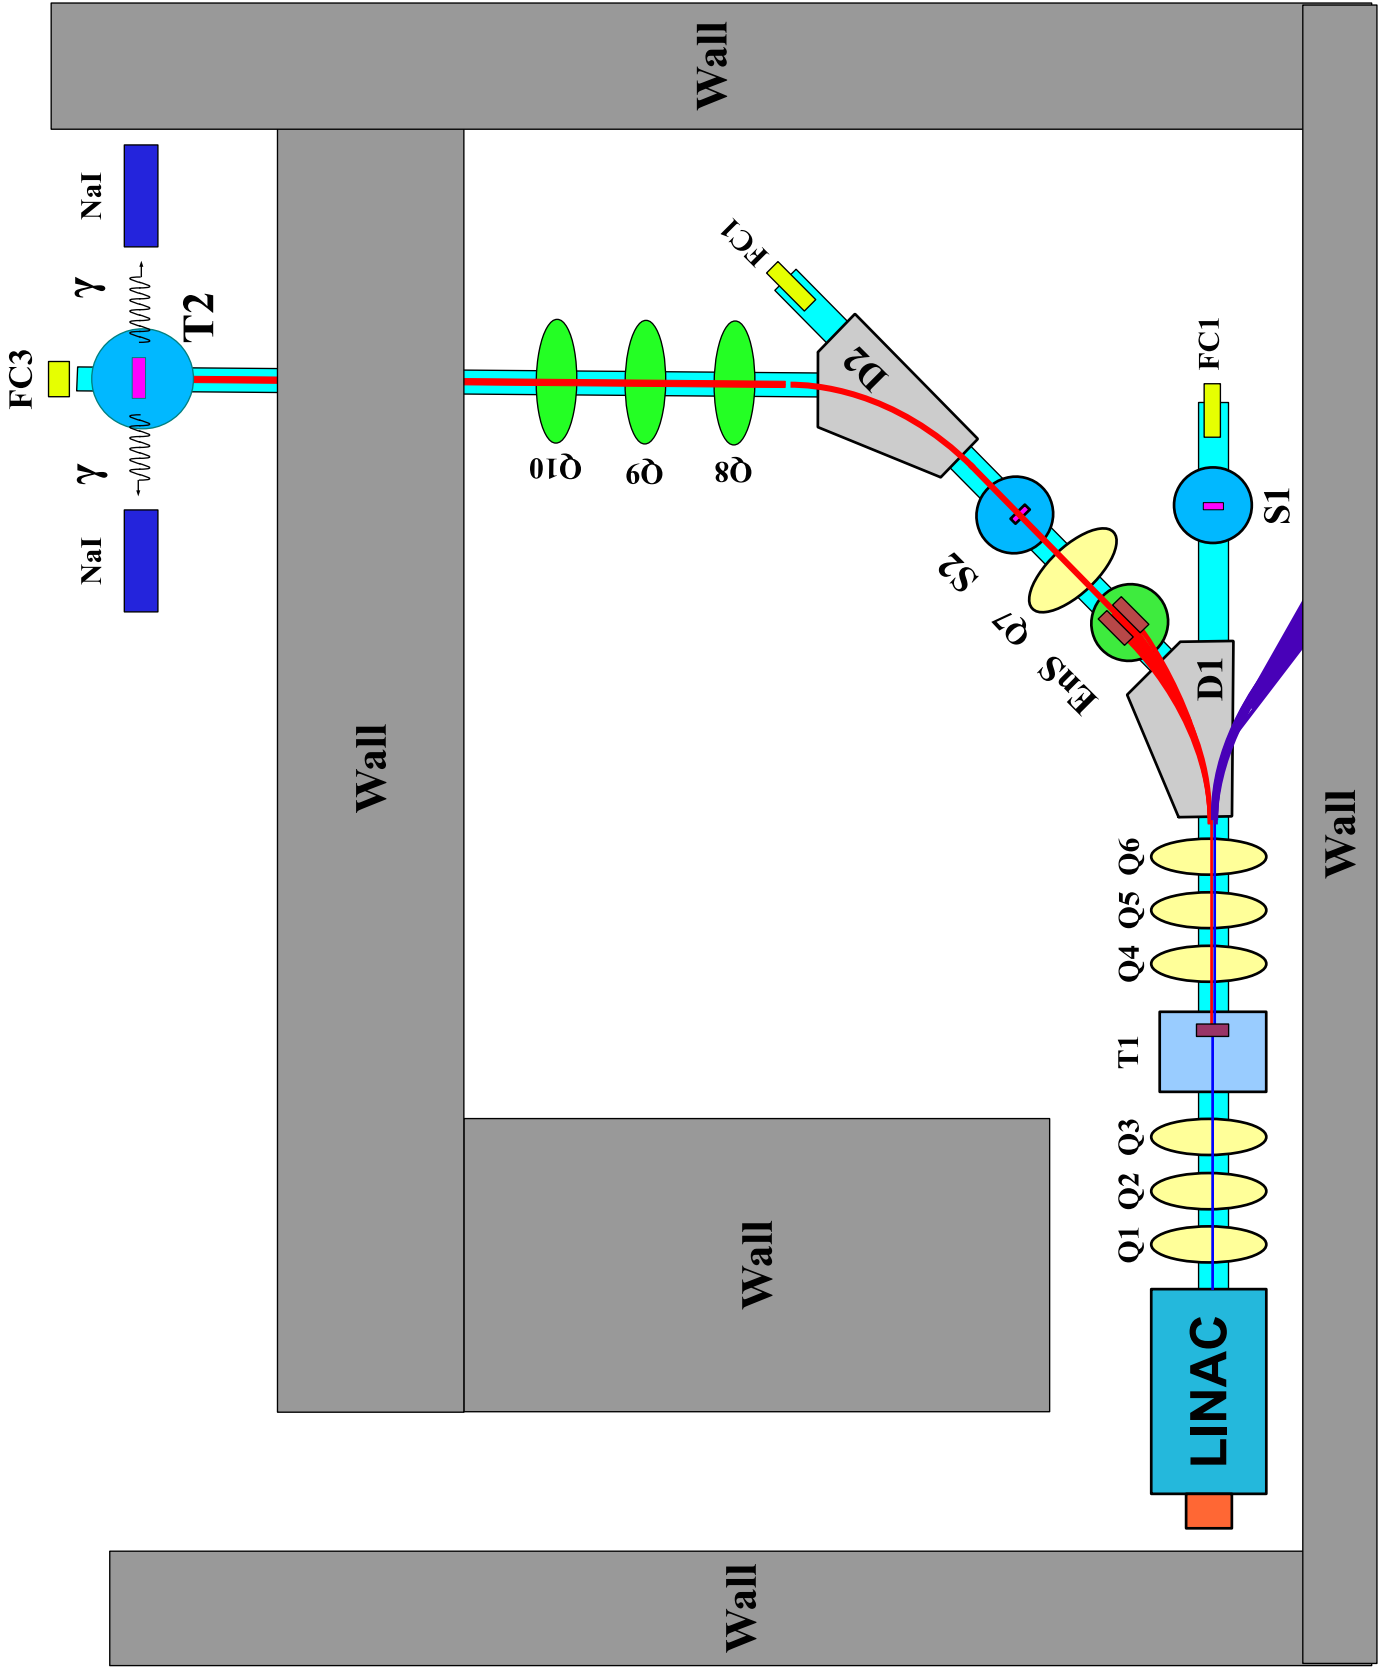


Figure 3: The new HRRL beamline configuration for positron generation.

## 4 Preparation for the Positron Production Experiment

### 4.1 HRRL Emittance measurements

Emittance, a key parameter in accelerator physics, is used to quantify the quality of an electron beam produced by an accelerator. The beam size and divergence at any point in the beamline can be described using emittance and Twiss parameters.

An Optical Transition Radiation (OTR) based viewer was installed to allow measurements at the high electron currents available from the HRRL. The visible light from the OTR based viewer is produced when a relativistic electron beam crosses the boundary of two mediums with different dielectric constants. Visible radiation is emitted at an angle of  $90^\circ$  with respect to the incident beam direction [2] when the electron beam intersects the OTR target at a  $45^\circ$  angle. These emitted photons are observed using a digital camera and can be used to measure the shape and intensity of the electron beam based on the OTR distribution.

The emittance of the HRRL was measured to be less than  $0.4 \mu\text{m}$  using the OTR based tool at an energy of 15 MeV. The details of this emittance measurement using the quadrupole scanning method were described in the IPAC12 proceedings [3]. The results are summarized in Table 4.

Table 4: Emittance Measurement Results.

Parameter	Unit	Value
projected emittance $\epsilon_x$	$\mu\text{m}$	$0.37 \pm 0.02$
projected emittance $\epsilon_y$	$\mu\text{m}$	$0.30 \pm 0.04$
$\beta_x$ -function	m	$1.40 \pm 0.06$
$\beta_y$ -function	m	$1.17 \pm 0.13$
$\alpha_x$ -function	rad	$0.97 \pm 0.06$
$\alpha_y$ -function	rad	$0.24 \pm 0.07$
micro-pulse charge	pC	11
micro-pulse length	ps	35
energy of the beam $E$	MeV	$15 \pm 1.6$
relative energy spread $\Delta E/E$	%	10.4

### 4.2 Positron Detection using NaI crystals

A tungsten target will be placed at the end of the 90 degree beamline to annihilate positrons. I want to use two NaI detectors to detect the 511 keV photons created when positrons annihilate. I acquired some NaI crystals from Idaho Accelerator Center (IAC). Since their original bases used a slow post-amplifier, I built new PMT bases. I modified the design of model PA-14 from Saint-Gobain

Crystals & Detectors Ltd. These detectors are tested, calibrated, and ready to be used for the measurement. Fig. 4 shows the crystals and the bases I built. Fig. 5 shows the spectrum taken by the detector using button sources.



Figure 4: The NaI detector and base built.

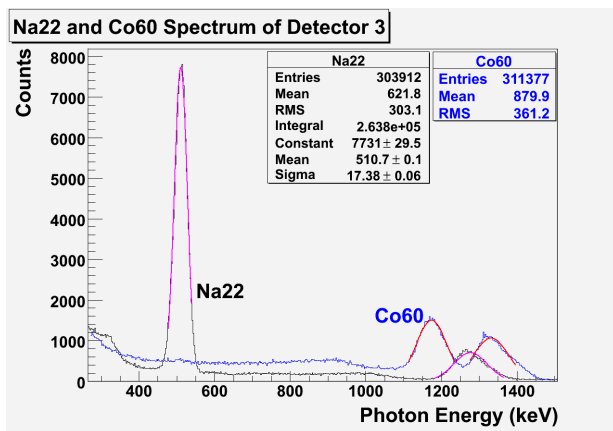


Figure 5: Detector 3 calibrated Spectrum.

## 5 Future Plan

We want to produce positrons using the HRRL beam line. We can improve positron collection efficiency by applying following methods:

1. By using a quadrupole triplet before tungsten a target, we will have control over the beam size and divergence at the target.
2. Cryogenically cooled converter will be installed, and these targets will be able to take on more beam power and increase positron yield.
3. Positrons will be collected by the quadrupole triplet system, which will improve collection efficiency.

4. Simulations will optimize beam elements for positron collection.

## References

- [1] G. Stancari and T. Forest "Design of a new beamline for electrons, positrons and photons at the HRRL lab", Pocatello, ID, USA (2009).
- [2] B. Gitter, Tech. Rep., Los Angeles, USA (1992).
- [3] S. Setiniyaz, K. Chouffani, T. Forest, and Y. Kim, in *Proc. IPAC2012*, New Orleans, USA.